

SX SP

FLOOR/CEILING SPLIT UNITS

5 Cooling models
From 1,9 kW to 5,5 kW

INDOOR UNIT **SX SP 12-15-18**



ULTRA SIMPLE

Mounting template for preparing both low wall mounting and ceiling installation.



ULTRA QUICK

Wall bracket used for pre-fitting and attaching pipe links (pipe outlet possible on the rear, left or right).



ULTRA PRACTICAL

Direct access to electrical and refrigeration connections without dismantling the unit.

APPLICATIONS

- Wine cellars.
- Areas subject to health & safety regulations (refuse collection areas, ...).
- Hospitals.
- Conservation, storage, production processes, ...
- Low temperature environment air conditioning.

PRODUCT ADVANTAGES

- Indoor temperature from 12°C to 18 °C.
- Floor or ceiling mounting.
- Integrated or remote regulation.
- All Seasons System supplied as standard equipment with the indoor unit (to be fitted to the outdoor unit).
- Anti-freezing safety protection with anti-freezing thermostat on the indoor unit.
- Electric heating (accessory).

INDOOR UNIT **SX SP 24-30**



OUTDOOR UNIT
GCNG 9-12-14




OUTDOOR UNIT
GC 18-24





SX SP

		SX SP 12	SX SP 15	SX SP 18	SX SP 24	SX SP 30
Indoor Units		ST SX SP 12	ST SX SP 15	ST SX P 18	ST SX SP24	ST SX SP 30
Outdoor Units		GCNG 9	GCNG 12	GCNG 14	GC 18	GC 24
Cooling	Capacity	1,9	2,1	3,1	4,4	5,5
	Input power	1,1	1,6	2,0	2,2	2,5
	EER/Energy Label	1,7 / G	1,3 / G	1,6 / G	2 / G	2,2 / G
	Operating limits	-10°/ 43° Dry Bulb	-10°/ 43° Dry Bulb	-10°/ 43° Dry Bulb	-10°/ 43° Dry Bulb	-10°/ 43° Dry Bulb
Indoor unit	Sound pressure level 1 mt	38	44	42	44	47
	Airflow	350	450	550	735	895
	Dimensions (WxDxH)	820x190x630	820x190x630	820x190x63	1200x190x630	1200x190x630
	Weight	20	21	21	30	32
	Part number	7SP012090	7SP012091	7SP012092	7SP012093	7SP012094
	Price	€				
Outdoor unit	Sound pressure level 1 mt	50	53	54	47	47
	Compressor type	Rotary	Rotary	Rotary	Scroll	Scroll
	Dimensions (WxDxH)	795x290x610	795x290x610	795x290x610	850x325x690	850x325x690
	Weight	31	37	37	56	58
Power supply 1-230V-50Hz	Part number	7SP061374	7SP061378	7SP061382	7SP061336	7SP061344
	Price	€			-	-
	Full set price	€			-	-
Power supply 3-400V-50Hz	Part number				7SP061337	7SP061345
	Price	€	-	-		
	Full set price	€	-	-		
Power supply 1-230V-50Hz	Power supply side	Indoor	Indoor	Indoor	Indoor or Outdoor	Indoor or Outdoor
	Power cable section	3 x 1,5	3 x 1,5	3 x 1,5	3 x 1,5	3 x 2,5
	Fuse rating am	10	10	16	16	16
	Electrical connections	5 x 1,5	5 x 1,5	5 x 1,5	5 x 1,5	5 x 1,5
Power supply 3-400V-50Hz	Power supply side	-	-	-	Outdoor	Outdoor
	Power cable section	-	-	-	5 x 1,5	5 x 1,5
	Fuse rating am	-	-	-	6	6
	Electrical connections	-	-	-	5 x 1,5	5 x 1,5
Pipe line	Suction pipe diameter	1/2"	1/2"	1/2"	5/8"	5/8"
	Liquid pipe diameter	1/4"	1/4"	1/4"	3/8"	3/8"
	Max lenght	15	15	15	25	25
	Max height	7	7	7	10	10

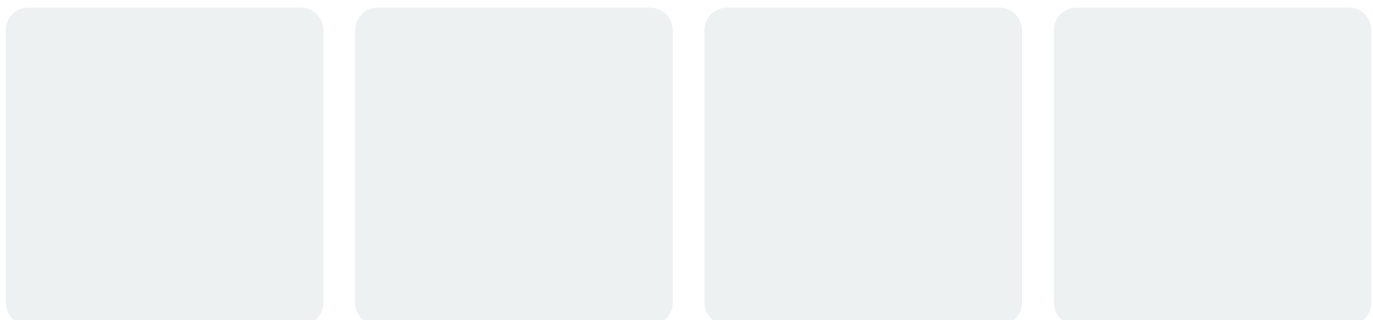

Accessories		SX SP 12	SX SP 15	SX SP 18	SX SP 24	SX SP 30
Single phase electric heating	Capacity (W)	1000	1000	1000	1500	1500
	7ACEL1172	€				
	7ACEL1173	€				
Rear panel tube cover	7ACTL0073	€				
	7ACTL0074	€				
Mounting bracket	7ACTL0016	€	n.a.	-	-	-
	7ACTL0018	€	-	n.a.		