

Airwell

TECHNICAL DATA MANUAL

WELLEA SPLIT A R32

English

AW-YHPSA04-H91

AW-YHPSA06-H91

AW-YHPSA08-H91

AW-YHPSA10-H91

AW-YHPSA12-H91


AW-YHPSA14-H91

AW-YHPSA16-H91

AW-YHPSA12-H93

AW-YHPSA14-H93

AW-YHPSA16-H93

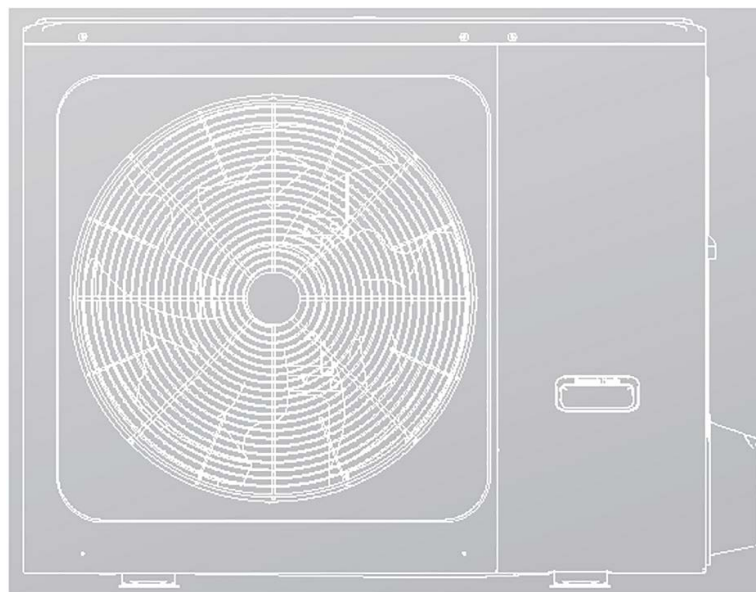

Model		For low - temperature application														
Outdoor unit	Indoor unit	Energy efficiency class	Indoor unit sound power dB	Outdoor unit sound power dB	average climate				colder climate				warmer climate			
					Rated heat output kW	Seasonal space heating energy efficiency %	For space heating,annual energy consumption kWh	Rated heat output kW	Seasonal space heating energy efficiency %	For space heating,annual energy consumption kWh	Rated heat output kW	Seasonal space heating energy efficiency %	For space heating,annual energy consumption kWh	Rated heat output kW	Seasonal space heating energy efficiency %	For space heating,annual energy consumption kWh
AW-YHPSA04-H91	AW-WHPSA0406-N91	A+++	38	56	5.5	191.0	2351	4.6	159.5	2769	5.5	255.4	1146			
AW-YHPSA06-H91	AW-WHPSA0406-N91	A+++	38	58	6.8	195.0	2845	5.6	165.3	3300	6.1	259.8	1244			
AW-YHPSA08-H91	AW-WHPSA0810-N91	A+++	42	59	8.1	205.6	3218	7.0	170.0	3976	8.1	276.6	1551			
AW-YHPSA10-H91	AW-WHPSA0810-N91	A+++	42	60	9.2	204.8	3644	7.7	169.8	4423	8.6	280.5	1617			
AW-YHPSA12-H91	AW-WHPSA1216-N91	A+++	43	64	12.0	189.4	5152	11.4	160.2	6870	11.1	256.1	2292			
AW-YHPSA14-H91	AW-WHPSA1216-N91	A+++	43	65	13.7	185.7	6012	12.6	159.6	7667	12.1	260.3	2457			
AW-YHPSA16-H91	AW-WHPSA1216-N91	A+++	43	68	15.2	181.7	6804	13.7	157.8	8431	13.1	248.5	2781			
AW-YHPSA12-H93	AW-WHPSA1216-N93	A+++	43	64	12.0	189.3	5153	11.4	160.2	6871	11.1	255.6	2296			
AW-YHPSA14-H93	AW-WHPSA1216-N93	A+++	43	65	13.7	185.6	6013	12.6	159.6	7667	12.1	259.8	2462			
AW-YHPSA16-H93	AW-WHPSA1216-N93	A+++	43	68	15.2	181.6	6805	13.7	157.8	8431	13.1	248.1	2786			

Model		For medium - temperature application											
Outdoor unit	Indoor unit	Energy efficiency class	Indoor unit sound power dB	Outdoor unit sound power dB	average climate			colder climate			warmer climate		
					Rated heat output kW	Seasonal space heating energy efficiency %	For space heating, annual energy consumption kWh	Rated heat output kW	Seasonal space heating energy efficiency %	For space heating, annual energy consumption kWh	Rated heat output kW	Seasonal space heating energy efficiency %	For space heating, annual energy consumption kWh
AW-YHPSA04-H91	AW-WHPSA0406-N91	A++	38	56	4.4	129.5	2742	3.4	102.1	3158	5.0	163.1	1614
AW-YHPSA06-H91	AW-WHPSA0406-N91	A++	38	58	5.7	137.9	3343	4.3	111.1	3680	5.1	165.4	1634
AW-YHPSA08-H91	AW-WHPSA0810-N91	A++	42	59	6.6	131.6	4054	5.8	112.1	4948	7.6	177.2	2242
AW-YHPSA10-H91	AW-WHPSA0810-N91	A++	42	60	7.7	135.7	4567	6.7	116.5	5539	8.6	181.7	2496
AW-YHPSA12-H91	AW-WHPSA1216-N91	A++	43	64	11.6	135.1	6927	10.3	117.8	8419	12.5	174.1	3376
AW-YHPSA14-H91	AW-WHPSA1216-N91	A++	43	65	12.1	135.6	7202	11.0	118.9	8866	13.7	176.5	4088
AW-YHPSA16-H91	AW-WHPSA1216-N91	A++	43	68	13.0	133.3	7895	11.8	121.8	9309	13.8	176.1	4112
AW-YHPSA12-H93	AW-WHPSA1216-N93	A++	43	64	11.6	135.1	6928	10.3	117.7	8420	12.5	173.8	3780
AW-YHPSA14-H93	AW-WHPSA1216-N93	A++	43	65	12.1	135.6	7203	11.0	118.9	8867	13.7	176.4	4092
AW-YHPSA16-H93	AW-WHPSA1216-N93	A++	43	68	13.0	133.2	7896	11.8	121.8	9310	13.8	175.9	4116

Product fiche 1

Indoor unit sound power (*)		Heat pump space heater							Outdoor	
		AW-YHPSA04-H91	AW-WHPSA0406-N91	AW-YHPSA06-H91	AW-WHPSA06-N91	AW-YHPSA08-H91	AW-WHPSA0810-N91	AW-YHPSA10-H91	AW-WHPSA10-N91	AW-YHPSA12-H91
Average climate low temperature application		[dB]	38.0	38.0	38.0	42.0	42.0	42.0	43.0	
Average climate medium temperature application		[dB]	56.0	56.0	58.0	59.0	59.0	60.0	64.0	
Capacity of the back-up heater integrated in the unit		[kW]	3	3	3	3	3	3	3	
Space heating		-	A+++	A+++	A+++	A+++	A+++	A+++	A+++	
Space heating		-	A++	A++	A++	A++	A++	A++	A++	
Average climate (Design temperature = -10°C)										
Space heating 35°C		[kW]	5.5	5.5	6.8	8.1	8.1	9.2	12.0	
Seasonal space heating efficiency (ηs)		[%]	191.0	191.0	195.0	205.6	205.6	204.8	189.4	
Annual energy consumption		[kWh]	2,351	2,351	2,845	3,218	3,218	3,644	5,152	
Prated (declared heating capacity) @ -10°C		[kW]	4.4	4.4	5.7	6.6	6.6	7.7	11.6	
Space heating 55°C		[%]	129.5	129.5	137.9	131.6	131.6	135.7	135.1	
Annual energy consumption		[kWh]	2,742	2,742	3,343	4,054	4,054	4,567	6,927	
Part load conditions space heating average climate low temperature application										
(A) condition (-7°C)		Pdh (declared heating capacity)	[kW]	4.88	6.03	7.18	7.18	8.10	10.61	
		COPd (declared COP)	-	3.19	3.09	3.35	3.35	3.23	2.88	
		Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90	0.90	
(B) condition (2°C)		Pdh (declared heating capacity)	[kW]	3.05	3.88	4.65	4.65	5.18	6.69	
		COPd (declared COP)	-	4.78	4.85	5.09	5.09	5.01	4.65	
		Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90	0.90	
(C) condition (7°C)		Pdh (declared heating capacity)	[kW]	1.93	2.39	2.90	2.90	3.32	4.44	
		COPd (declared COP)	-	6.13	6.63	6.82	6.82	7.08	6.62	
		Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90	0.90	
(D) condition (12°C)		Pdh (declared heating capacity)	[kW]	1.48	1.39	1.63	1.63	1.65	3.74	
		COPd (declared COP)	-	8.05	7.93	8.35	8.35	8.58	8.47	
		Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90	0.90	
(E) Tol (temperature operating limit)		Tol (temperature operating limit)	[°C]	-10.00	-10.00	-10.00	-10.00	-10.00	-10.00	
		Pdh (declared heating capacity)	[kW]	4.41	5.36	6.44	6.44	7.40	10.74	
		COPd (declared COP)	-	2.86	2.76	3.04	3.04	2.96	2.77	
		WTOL (Heating water Operation Limit)	[°C]	60.00	60.00	60.00	60.00	60.00	60.00	

Product fiche 1

Heat pump space heater							
Indoor unit sound power (*)	Outdoor		AW-YHPSA14-H91	AW-YHPSA16-H91	AW-YHPSA12-H93	AW-YHPSA14-H93	AW-YHPSA16-H93
	Indoor		AW-WHPSA1216-N91	AW-WHPSA1216-N91	AW-WHPSA1216-N93	AW-WHPSA1216-N93	AW-WHPSA1216-N93
Average climate low temperature application	[dB]		43.0	43.0	43.0	43.0	43.0
Average climate medium temperature application	[dB]		65.0	68.0	64.0	65.0	68.0
Capacity of the back-up heater integrated in the unit	[kW]		3	3	9	9	9
Space heating	-		A+++	A+++	A+++	A+++	A+++
Space heating	-		A++	A++	A++	A++	A++
Average climate (Design temperature = -10°C)							
Prated (declared heating capacity) @ -10°C	[kW]		13.7	15.2	12.0	13.7	15.2
Seasonal space heating efficiency (ηs)	[%]		185.7	181.7	189.3	185.6	181.6
Annual energy consumption	[kWh]		6,012	6,804	5,153	6,013	6,805
Prated (declared heating capacity) @ -10°C	[kW]		12.1	13.0	11.6	12.1	13.0
Seasonal space heating efficiency (ηs)	[%]		135.6	133.3	135.1	135.6	133.2
Annual energy consumption	[kWh]		7,202	7,895	6,928	7,203	7,896
Part load conditions space heating average climate low temperature application							
Pdh (declared heating capacity)	[kW]		12.14	13.45	10.61	12.14	13.45
COPd (declared COP)	-		2.79	2.72	2.88	2.79	2.72
Cdh(degradation coefficient)	-		0.90	0.90	0.90	0.90	0.90
Pdh (declared heating capacity)	[kW]		7.94	8.56	6.69	7.94	8.56
COPd (declared COP)	-		4.52	4.41	4.65	4.52	4.41
Cdh(degradation coefficient)	-		0.90	0.90	0.90	0.90	0.90
Pdh (declared heating capacity)	[kW]		5.20	5.70	4.44	5.20	5.70
COPd (declared COP)	-		6.68	6.56	6.62	6.68	6.56
Cdh(degradation coefficient)	-		0.90	0.90	0.90	0.90	0.90
Pdh (declared heating capacity)	[kW]		3.75	3.78	3.74	3.75	3.78
COPd (declared COP)	-		8.52	8.51	8.47	8.52	8.51
Cdh(degradation coefficient)	-		0.90	0.90	0.90	0.90	0.90
Tol (temperature operating limit)	[°C]		-10.00	-10.00	-10.00	-10.00	-10.00
Pdh (declared heating capacity)	[kW]		11.47	12.52	10.74	11.47	12.52
COPd (declared COP)	-		2.59	2.48	2.77	2.59	2.48
WTOL (Heating water Operation Limit)	[°C]		60.00	60.00	60.00	60.00	60.00

Product fiche 2

Heat pump space heater		Outdoor		AW-YHPSA04-H91	AW-YHPSA06-H91	AW-YHPSA08-H91	AW-YHPSA10-H91	AW-YHPSA12-H91
		Indoor		AW-WHPSA0406-N91	AW-WHPSA0406-N91	AW-WHPSA0810-N91	AW-WHPSA0810-N91	AW-WHPSA1216-N91
(F) Tivalent temperature	Tblv	[°C]	-7.00	-7.00	-7.00	-7.00	-7.00	-7.00
	Pdh (declared heating capacity)	[kW]	4.88	6.03	7.18	8.10	10.61	
Supplementary capacity at P _{design}	COPd (declared COP)	-	3.19	3.09	3.35	3.23	2.88	
	P _{sup} (@T _{designh} : -10°C)	[kW]	1.11	1.45	1.68	1.76	1.26	
Part load conditions space heating average climate medium temperature application								
(A) condition (-7°C)	Pdh (declared heating capacity)	[kW]	3.89	5.04	5.84	6.78	10.24	
	COPd (declared COP)	-	2.17	2.17	2.16	2.24	2.01	
(B) condition (2°C)	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90	
	Pdh (declared heating capacity)	[kW]	2.38	3.12	3.76	4.28	6.52	
(C) condition (7°C)	COPd (declared COP)	-	3.30	3.51	3.30	3.42	3.44	
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90	
(D) condition (12°C)	Pdh (declared heating capacity)	[kW]	2.94	2.08	2.43	2.77	4.36	
	COPd (declared COP)	-	4.41	4.54	4.34	4.52	4.59	
(E) Tol (temperature operating limit)	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90	
	Pdh (declared heating capacity)	[kW]	1.32	1.28	1.39	1.58	3.29	
(F) Tivalent temperature	COPd (declared COP)	-	5.66	5.59	5.33	5.68	6.05	
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90	
Supplementary capacity at P _{design}	Tol (temperature operating limit)	[°C]	-10.00	-10.00	-10.00	-10.00	-10.00	
	Pdh (declared heating capacity)	[kW]	3.42	4.52	4.91	5.38	9.10	
Colder climate (Design temperature = -22°C)	COPd (declared COP)	-	1.91	1.91	1.84	1.83	1.79	
	WTOL (Heating water Operation Limit)	[°C]	60.00	60.00	60.00	60.00	60.00	
Space heating 35°C	Tblv	[°C]	-7.00	-7.00	-7.00	-7.00	-7.00	
	Pdh (declared heating capacity)	[kW]	3.89	5.04	5.84	6.78	10.27	
Annual energy consumption	COPd (declared COP)	-	2.17	2.17	2.16	2.24	2.01	
	P _{sup} (@T _{designh} : -10°C)	[kW]	0.98	1.18	1.69	2.28	2.50	
Prated (declared heating capacity) @ -22°C								
Prated (declared heating capacity) @ -22°C		[kW]	4.6	5.6	7.0	7.7	11.4	
Seasonal space heating efficiency (ηs)		[%]	159.5	165.3	170	169.8	160.2	
Annual energy consumption		[kWh]	2,769	3,300	3,976	4,423	6,870	

Product fiche 2

Heat pump space heater									
	Outdoor	AW-YHPSA14-H91	AW-YHPSA16-H91	AW-YHPSA12-H93	AW-YHPSA14-H93	AW-YHPSA16-H93	AW-YHPSA12-H93	AW-YHPSA14-H93	AW-YHPSA16-H93
		AW-WHPSA1216-N91	AW-WHPSA1216-N91	AW-WHPSA1216-N93	AW-WHPSA1216-N93	AW-WHPSA1216-N93	AW-WHPSA1216-N93	AW-WHPSA1216-N93	AW-WHPSA1216-N93
	Indoor								
	[°C]	-7.00	-7.00	-7.00	-7.00	-7.00	-7.00	-7.00	-7.00
(F) Tivalent temperature	[kW]	12.14	13.45	10.61	12.14	13.45	10.61	12.14	13.45
	-	2.79	2.72	2.88	2.79	2.72	2.88	2.79	2.72
Supplementary capacity at P_design	[kW]	2.23	2.68	1.26	2.23	2.68	1.26	2.23	2.68
Part load conditions space heating average climate medium temperature application									
	[kW]	10.68	11.52	10.24	10.68	11.52	10.24	10.68	11.52
(A) condition (-7°C)	-	2.01	1.99	2.01	2.01	1.99	2.01	2.01	1.99
	-	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
(B) condition (2°C)	[kW]	6.86	7.18	6.52	6.86	7.18	6.52	6.86	7.18
	-	3.43	3.34	3.44	3.43	3.34	3.44	3.43	3.34
(C) condition (7°C)	[kW]	4.63	4.67	4.36	4.63	4.67	4.36	4.63	4.67
	-	4.66	4.61	4.59	4.66	4.61	4.59	4.66	4.61
(D) condition (12°C)	[kW]	3.31	3.32	3.29	3.31	3.32	3.29	3.31	3.32
	-	6.13	6.07	6.05	6.13	6.07	6.05	6.13	6.07
(E) Tol (temperature operating limit)	[°C]	-10.00	-10.00	-10.00	-10.00	-10.00	-10.00	-10.00	-10.00
	[kW]	9.19	10.33	9.10	9.19	10.33	9.10	9.19	10.33
	-	1.76	1.80	1.79	1.76	1.80	1.79	1.76	1.80
WTOL (Heating water Operation Limit)	[°C]	60.00	60.00	60.00	60.00	60.00	60.00	60.00	60.00
	[°C]	-7.00	-7.00	-7.00	-7.00	-7.00	-7.00	-7.00	-7.00
(F) Tivalent temperature	[kW]	10.68	11.52	10.27	10.68	11.52	10.27	10.68	11.52
	-	2.01	1.99	2.01	2.01	1.99	2.01	2.01	1.99
Supplementary capacity at P_design	[kW]	2.91	2.67	2.50	2.91	2.67	2.50	2.91	2.67
Colder climate (Design temperature = -22°C)									
	[kW]	12.6	13.7	11.4	12.6	13.7	11.4	12.6	13.7
Prated (declared heating capacity) @ -22°C	[%]	159.6	157.8	160.2	159.6	157.8	160.2	159.6	157.8
Seasonal space heating efficiency (ηs)	[kWh]	7,667	8,431	6,871	7,667	8,431	6,871	7,667	8,431
Annual energy consumption									

Product fiche 3

Heat pump space heater		Outdoor						AW-YHPSA04-H91						AW-YHPSA06-H91						AW-YHPSA08-H91						AW-YHPSA10-H91						AW-YHPSA12-H91															
		Indoor		[kW]		[%]		[kWh]		3.4		4.3		5.8		6.7		10.3		3.4		4.3		5.8		6.7		10.3		102.1		111.1		112.1		116.5		117.8		3.158		3.680		4.948		5.539	
Prated (declared heating capacity) @ -22°C		[kW]		3.4		4.3		5.8		6.7		10.3		102.1		111.1		112.1		116.5		117.8		3.158		3.680		4.948		5.539		8.419															
Seasonal space heating efficiency (ηs)		[%]		102.1		111.1		112.1		116.5		117.8																																			
Annual energy consumption		[kWh]		3.158		3.680		4.948		5.539		8.419																																			
Part load conditions space heating colder climate low temperature application																																															
(A) condition (-7°C)		Pdh (declared heating capacity)		[kW]		2.75		3.42		4.46		4.83		7.05																																	
		COPd (declared COP)		-		3.49		3.59		3.66		3.60		3.48																																	
		Cdh (degradation coefficient)		-		0.90		0.90		0.90		0.90		0.90																																	
(B) condition (2°C)		Pdh (declared heating capacity)		[kW]		1.77		2.06		2.69		2.94		4.67																																	
		COPd (declared COP)		-		4.95		5.21		5.20		5.26		4.96																																	
		Cdh (degradation coefficient)		-		0.90		0.90		0.90		0.90		0.90																																	
(C) condition (7°C)		Pdh (declared heating capacity)		[kW]		1.17		1.46		1.65		1.92		3.14																																	
		COPd (declared COP)		-		5.53		6.24		6.53		7.08		6.10																																	
		Cdh (degradation coefficient)		-		0.90		0.90		0.90		0.90		0.90																																	
(D) condition (12°C)		Pdh (declared heating capacity)		[kW]		1.43		1.44		1.65		1.65		3.57																																	
		COPd (declared COP)		-		7.67		7.66		7.96		7.96		7.87																																	
		Cdh (degradation coefficient)		-		0.90		0.90		0.90		0.90		0.90																																	
(E) Tol (temperature operating limit)		Tol (temperature operating limit)		[°C]		-22.00		-22.00		-22.00		-22.00		-22.00																																	
		Pdh (declared heating capacity)		[kW]		2.80		3.48		4.06		4.62		7.01																																	
		COPd (declared COP)		-		1.97		1.96		1.95		1.97		1.98																																	
(F) Tivalent temperature		WTOL (Heating water Operation Limit)		[°C]		51.00		51.00		51.00		51.00		51.00																																	
		Tbiv		[°C]		-15.00		-15.00		-15.00		-15.00		-15.00																																	
		Pdh (declared heating capacity)		[kW]		3.72		4.59		5.69		6.32		9.28																																	
		COPd (declared COP)		-		2.57		2.53		2.83		2.64		2.59																																	
Supplementary capacity at P_design		Psup (@Tdesignh: -22°C)		[kW]		1.76		2.15		2.91		3.08		4.40																																	
Part load conditions space heating colder climate medium temperature application																																															
(A) condition (-7°C)		Pdh (declared heating capacity)		[kW]		2.13		2.69		3.86		4.27		6.63																																	
		COPd (declared COP)		-		2.32		2.46		2.48		2.54		2.63																																	
		Cdh (degradation coefficient)		-		0.90		0.90		0.90		0.90		0.90																																	

Product fiche 3

Heat pump space heater		Outdoor					
		AW-YHPSA14-H91	AW-WHPSA1216-N91	AW-YHPSA16-H91	AW-WHPSA1216-N91	AW-YHPSA12-H93	AW-WHPSA1216-N93
Space heating 55°C	Prated (declared heating capacity) @ -22°C	[kW]	11.0	11.8	10.3	11.0	11.8
	Seasonal space heating efficiency (ηs)	[%]	118.9	121.8	117.7	118.9	121.8
	Annual energy consumption	[kWh]	8,866	9,309	8,420	8,867	9,310
Part load conditions space heating colder climate low temperature application							
(A) condition (-7°C)	Pdh (declared heating capacity)	[kW]	7.96	8.31	7.05	7.96	8.31
	COPd (declared COP)	-	3.44	3.37	3.48	3.44	3.37
	Cdh (degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(B) condition (2°C)	Pdh (declared heating capacity)	[kW]	5.05	5.26	4.67	5.05	5.26
	COPd (declared COP)	-	4.92	4.86	4.96	4.92	4.86
	Cdh (degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(C) condition (7°C)	Pdh (declared heating capacity)	[kW]	3.15	3.62	3.14	3.15	3.62
	COPd (declared COP)	-	6.11	6.49	6.10	6.11	6.49
	Cdh (degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(D) condition (12°C)	Pdh (declared heating capacity)	[kW]	3.57	3.34	3.57	3.57	3.34
	COPd (declared COP)	-	7.82	7.40	7.87	7.82	7.40
	Cdh (degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
(E) Tol (temperature operating limit)	Tol (temperature operating limit)	[°C]	-22.00	-22.00	-22.00	-22.00	-22.00
	Pdh (declared heating capacity)	[kW]	7.57	8.88	7.01	7.57	8.88
	COPd (declared COP)	-	1.92	1.97	1.98	1.92	1.97
(F) Tivalent temperature	WTOL (Heating water Operation Limit)	[°C]	51.00	51.00	51.00	51.00	51.00
	Tblv	[°C]	-15.00	-15.00	-15.00	-15.00	-15.00
	Pdh (declared heating capacity)	[kW]	10.31	11.22	9.28	10.31	11.22
Supplementary capacity at P_design	COPd (declared COP)	-	2.53	2.43	2.59	2.53	2.43
	Psup (@Tdesignh: -22°C)	[kW]	5.03	4.82	4.40	5.03	4.82
Part load conditions space heating colder climate medium temperature application							
(A) condition (-7°C)	Pdh (declared heating capacity)	[kW]	6.89	7.64	6.63	6.89	7.64
	COPd (declared COP)	-	2.66	2.65	2.63	2.66	2.65
	Cdh (degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90

Product fiche 4

Heat pump space heater		Outdoor		AW-YHPSA04-H91	AW-WHPSA0406-N91	AW-YHPSA06-H91	AW-WHPSA0406-N91	AW-YHPSA08-H91	AW-WHPSA0810-N91	AW-YHPSA10-H91	AW-WHPSA1010-N91	AW-YHPSA12-H91	AW-WHPSA1216-N91
		Indoor	[kW]	1.28	1.60	2.21	2.57	4.06					
(B) condition (2°C)	Pdh (declared heating capacity)	[kW]	1.28	1.60	2.21	2.57	4.06						
	COPd (declared COP)	-	2.99	3.36	3.35	3.51	3.60						
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90						
(C) condition (7°C)	Pdh (declared heating capacity)	[kW]	1.01	1.02	1.44	1.65	2.78						
	COPd (declared COP)	-	3.86	3.94	4.11	4.37	4.54						
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90						
(D) condition (12°C)	Pdh (declared heating capacity)	[kW]	1.36	1.37	1.47	1.48	3.33						
	COPd (declared COP)	-	6.28	6.35	5.92	5.96	6.25						
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90						
(E) Tol (temperature operating limit)	Tol (temperature operating limit)	[°C]	-22.00	-22.00	-22.00	-22.00	-22.00						
	Pdh (declared heating capacity)	[kW]	1.64	2.09	2.80	2.80	4.19						
	COPd (declared COP)	-	1.02	1.13	1.22	1.22	1.13						
(F) Tivalent temperature	WTOL (Heating water Operation Limit)	[°C]	51.00	51.00	51.00	51.00	51.00						
	Tblv	[°C]	-15.00	-15.00	-15.00	-15.00	-15.00						
	Pdh (declared heating capacity)	[kW]	2.74	3.47	4.71	5.47	8.41						
Supplementary capacity at P _{design}	COPd (declared COP)	-	1.74	1.86	1.90	2.00	1.84						
	Psup (@Tdesignh: -22°C)	[kW]	1.72	2.17	2.97	3.91	6.12						
Warmer climate (Design temperature = 2°C)													
Space heating 35°C	Prated (declared heating capacity) @ 2 °C	[kW]	5.5	6.1	8.1	8.6	11.1						
	Seasonal space heating efficiency (ηs)	[%]	255.4	259.8	276.6	280.5	256.1						
	Annual energy consumption	[kWh]	1,146	1,244	1,551	1,617	2,292						
Space heating 55°C	Prated (declared heating capacity) @ 2 °C	[kW]	5.0	5.1	7.6	8.6	12.5						
	Seasonal space heating efficiency (ηs)	[%]	163.1	165.4	177.2	181.7	174.1						
	Annual energy consumption	[kWh]	1,614	1,634	2,242	2,496	3,376						
Part load conditions space heating warmer climate low temperature application													
(B) condition (2°C)	Pdh (declared heating capacity)	[kW]	5.34	5.93	7.56	8.44	11.26						
	COPd (declared COP)	-	3.94	3.91	3.98	3.84	3.59						
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90						
(C) condition (7°C)	Pdh (declared heating capacity)	[kW]	3.56	3.93	5.22	5.52	7.14						
	COPd (declared COP)	-	5.92	5.89	6.26	6.18	5.87						
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90						

Product fiche 4

Heat pump space heater		Outdoor		AW-YHPSA14-H91	AW-YHPSA16-H91	AW-YHPSA12-H93	AW-YHPSA14-H93	AW-YHPSA16-H93
		Indoor		AW-WHPSA1216-N91	AW-WHPSA1216-N91	AW-WHPSA1216-N93	AW-WHPSA1216-N93	AW-WHPSA1216-N93
(B) condition (2°C)	Pdh (declared heating capacity)	[kW]	4.32	4.42	4.06	4.32	4.42	4.42
	COPd (declared COP)	-	3.66	3.79	3.60	3.66	3.79	3.79
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90	0.90
(C) condition (7°C)	Pdh (declared heating capacity)	[kW]	3.06	2.97	2.78	3.06	2.97	2.97
	COPd (declared COP)	-	4.72	4.81	4.54	4.72	4.81	4.81
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90	0.90
(D) condition (12°C)	Pdh (declared heating capacity)	[kW]	3.33	3.43	3.33	3.33	3.43	3.43
	COPd (declared COP)	-	6.25	6.29	6.25	6.25	6.29	6.29
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90	0.90
(E) Tol (temperature operating limit)	Tol (temperature operating limit)	[°C]	-22.00	-22.00	-22.00	-22.00	-22.00	-22.00
	Pdh (declared heating capacity)	[kW]	4.20	5.21	4.19	4.20	5.21	5.21
	COPd (declared COP)	-	1.13	1.23	1.13	1.13	1.23	1.23
(F) Tivalent temperature	WTOL (Heating water Operation Limit)	[°C]	51.00	51.00	51.00	51.00	51.00	51.00
	Tblv	[°C]	-15.00	-15.00	-15.00	-15.00	-15.00	-15.00
	Pdh (declared heating capacity)	[kW]	8.94	9.61	8.41	8.94	9.61	9.61
Supplementary capacity at P _{design}	COPd (declared COP)	-	1.79	1.86	1.84	1.79	1.86	1.86
	Psup (@Tdesignh: -22°C)	[kW]	6.76	6.59	6.12	6.76	6.59	6.59
Warmer climate (Design temperature = 2°C)								
Space heating 35°C	Prated (declared heating capacity) @ 2 °C	[kW]	12.1	13.1	11.1	12.1	13.1	13.1
	Seasonal space heating efficiency (ηs)	[%]	260.3	248.5	255.6	259.8	248.1	248.1
	Annual energy consumption	[kWh]	2,457	2,781	2,296	2,462	2,786	2,786
Space heating 55°C	Prated (declared heating capacity) @ 2 °C	[kW]	13.7	13.8	12.5	13.7	13.8	13.8
	Seasonal space heating efficiency (ηs)	[%]	176.5	176.1	173.8	176.4	175.9	175.9
	Annual energy consumption	[kWh]	4,088	4,112	3,780	4,092	4,116	4,116
Part load conditions space heating warmer climate low temperature application								
(B) condition (2°C)	Pdh (declared heating capacity)	[kW]	12.04	13.10	11.26	12.04	13.10	13.10
	COPd (declared COP)	-	3.44	3.35	3.59	3.44	3.35	3.35
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90	0.90
(C) condition (7°C)	Pdh (declared heating capacity)	[kW]	7.78	8.41	7.14	7.78	8.41	8.41
	COPd (declared COP)	-	5.84	5.36	5.87	5.84	5.36	5.36
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90	0.90

Product fiche 5

Heat pump space heater		Outdoor					
		AW-YHPSA04-H91 AW-WHPSA0406-N91	AW-YHPSA06-H91 AW-WHPSA0406-N91	AW-YHPSA08-H91 AW-WHPSA0810-N91	AW-YHPSA10-H91 AW-WHPSA0810-N91	AW-YHPSA12-H91 AW-WHPSA1216-N91	
(D) condition (12°C)	Pdh (declared heating capacity)	[kW]	1.63	1.79	2.62	2.62	3.55
	COPd (declared COP)	-	7.91	8.20	9.23	9.04	7.94
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
	ToI (temperature operating limit)	[°C]	2.00	2.00	2.00	2.00	2.00
(E) ToI (temperature operating limit)	Pdh (declared heating capacity)	[kW]	5.34	5.93	7.56	8.44	11.26
	COPd (declared COP)	-	3.94	3.91	3.98	3.84	3.59
	WTOL (Heating water Operation Limit)	[°C]	62.00	62.00	62.00	62.00	62.00
	Tblv	[°C]	7.00	7.00	7.00	7.00	7.00
(F) Tblv temperature	Pdh (declared heating capacity)	[kW]	3.56	3.93	5.22	5.52	7.14
	COPd (declared COP)	-	5.92	5.89	6.26	6.18	5.87
	Psup (@Tdesignh: 2°C)	[kW]	0.18	0.18	0.55	0.14	0.00
	Supplementary capacity at P_design						
Part load conditions space heating warmer climate medium temperature application							
(B) condition (2°C)	Pdh (declared heating capacity)	[kW]	4.83	5.02	7.55	8.06	12.07
	COPd (declared COP)	-	2.51	2.48	2.59	2.59	2.31
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
	Pdh (declared heating capacity)	[kW]	3.22	3.31	4.86	5.54	8.04
(C) condition (7°C)	COPd (declared COP)	-	3.68	3.67	3.92	4.10	3.86
	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
	Pdh (declared heating capacity)	[kW]	1.47	1.59	2.32	2.53	3.75
	COPd (declared COP)	-	5.15	5.29	5.55	5.82	5.70
(D) condition (12°C)	Cdh(degradation coefficient)	-	0.90	0.90	0.90	0.90	0.90
	Pdh (declared heating capacity)	[kW]	2.00	2.00	2.00	2.00	2.00
	COPd (declared COP)	-	4.83	5.02	7.83	8.15	12.07
	Cdh(degradation coefficient)	-	2.51	2.48	2.66	2.61	2.31
(E) ToI (temperature operating limit)	WTOL (Heating water Operation Limit)	[°C]	62.00	62.00	62.00	62.00	62.00
	Tblv	[°C]	7.00	7.00	7.00	7.00	7.00
	Pdh (declared heating capacity)	[kW]	3.22	3.31	4.86	5.54	8.04
	COPd (declared COP)	-	3.68	3.67	3.92	4.10	3.86
(F) Tblv temperature	Psup (@Tdesignh: 2°C)	[kW]	0.18	0.12	0.00	0.48	0.43
	Supplementary capacity at P_design						

Product fiche 5

Heat pump space heater		Outdoor					
		AW-YHPSA14-H91	AW-YHPSA16-H91	AW-YHPSA12-H93	AW-YHPSA14-H93	AW-YHPSA16-H93	
(D) condition (12°C)	Pdh (declared heating capacity)	3.75	3.87	3.55	3.75	3.87	
	COPd (declared COP)	8.25	8.11	7.94	8.25	8.11	
	Cdh(degradation coefficient)	0.90	0.90	0.90	0.90	0.90	
(E) ToI (temperature operating limit)	ToI (temperature operating limit) [°C]	2.00	2.00	2.00	2.00	2.00	
	Pdh (declared heating capacity) [kW]	12.04	13.10	11.26	12.04	13.10	
	COPd (declared COP)	3.44	3.35	3.59	3.44	3.35	
	WTOL (Heating water Operation Limit) [°C]	62.00	62.00	62.00	62.00	62.00	
	Tblv [°C]	7.00	7.00	7.00	7.00	7.00	
(F) Tbivalent temperature	Pdh (declared heating capacity) [kW]	7.78	8.41	7.14	7.78	8.41	
	COPd (declared COP)	5.84	5.36	5.87	5.84	5.36	
	Psup (@Tdesignh: 2°C) [kW]	0.00	0.00	0.00	0.00	0.00	
Part load conditions space heating warmer climate medium temperature application							
(B) condition (2°C)	Pdh (declared heating capacity) [kW]	13.04	13.38	12.07	13.04	13.38	
	COPd (declared COP)	2.20	2.29	2.31	2.20	2.29	
	Cdh(degradation coefficient)	0.90	0.90	0.90	0.90	0.90	
(C) condition (7°C)	Pdh (declared heating capacity) [kW]	8.83	8.86	8.04	8.83	8.86	
	COPd (declared COP)	3.91	3.84	3.86	3.91	3.84	
	Cdh(degradation coefficient)	0.90	0.90	0.90	0.90	0.90	
(D) condition (12°C)	Pdh (declared heating capacity) [kW]	4.08	4.06	3.75	4.08	4.06	
	COPd (declared COP)	5.90	5.86	5.70	5.90	5.86	
	Cdh(degradation coefficient)	0.90	0.90	0.90	0.90	0.90	
(E) ToI (temperature operating limit)	ToI (temperature operating limit) [°C]	2.00	2.00	2.00	2.00	2.00	
	Pdh (declared heating capacity) [kW]	13.04	13.38	12.07	13.04	13.38	
	COPd (declared COP)	2.20	2.29	2.31	2.20	2.29	
	WTOL (Heating water Operation Limit) [°C]	62.00	62.00	62.00	62.00	62.00	
	Tblv [°C]	7.00	7.00	7.00	7.00	7.00	
(F) Tbivalent temperature	Pdh (declared heating capacity) [kW]	8.83	8.86	8.04	8.83	8.86	
	COPd (declared COP)	3.91	3.84	3.86	3.91	3.84	
	Psup (@Tdesignh: 2°C) [kW]	0.66	0.42	0.43	0.66	0.42	

Product fiche 6

Heat pump space heater		Outdoor		AW-YHP SA04-H91		AW-YHP SA06-H91		AW-YHP SA08-H91		AW-YHP SA10-H91		AW-YHP SA12-H91	
		Indoor		AW-WHP SA0406-N91		AW-WHP SA0406-N91		AW-WHP SA0810-N91		AW-WHP SA0810-N91		AW-WHP SA1216-N91	
Product description	Air-to-water heat pump	Y/N	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Water-to-water heat pump	Y/N	No	No	No	No	No	No	No	No	No	No	No
	Brine-to-water heat pump	NBVCXZ	No	No	No	No	No	No	No	No	No	No	No
	Low-temperature heat pump	Y/N	No	No	No	No	No	No	No	No	No	No	No
	Equipped with a supplementary heater	Y/N	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Heat pump combination heater	Y/N	No	No	No	No	No	No	No	No	No	No	No
Air to water unit	Rated airflow (outdoor)	[m ³ /h]	2770	2770	2770	2770	2770	2770	2770	2770	2770	2770	2770
Brine/water to water unit	Rated water/brine flow (outdoor H/E)		/	/	/	/	/	/	/	/	/	/	/
	Capacity control	-	Inverter	Inverter	Inverter	Inverter	Inverter	Inverter	Inverter	Inverter	Inverter	Inverter	Inverter
Other	P _{off} (Power consumption Off mode)	[kW]	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
	P _{to} (Power consumption Thermostat off mode)	[kW]	0.024	0.024	0.024	0.024	0.024	0.024	0.024	0.024	0.024	0.024	0.024
	P _{sb} (Power consumption Standby mode)	[kW]	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014	0.014
	P _{CK} (Power crankcase heater model)	[kW]	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Q _{elec} (Daily electricity consumption)	[kWh]	/	/	/	/	/	/	/	/	/	/	/
	Q _{fuel} (Daily fuel consumption)	[kWh]	/	/	/	/	/	/	/	/	/	/	/

Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

Product fiche according to energy label directive 2010/30/EC regulation (EU) 811/2013.

Product fiche 6

Heat pump space heater		Outdoor		AW-YHPSA14-H91		AW-YHPSA16-H91		AW-YHPSA12-H93		AW-YHPSA14-H93		AW-YHPSA16-H93	
		Indoor		AW-WHPSA1216-N91		AW-WHPSA1216-N91		AW-WHPSA1216-N93		AW-WHPSA1216-N93		AW-WHPSA1216-N93	
Product description	Air-to-water heat pump	Y/N	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Water-to-water heat pump	Y/N	No	No	No	No	No	No	No	No	No	No	No
	Brine-to-water heat pump	NBVCXZ	No	No	No	No	No	No	No	No	No	No	No
	Low-temperature heat pump	Y/N	No	No	No	No	No	No	No	No	No	No	No
	Equipped with a supplementary heater	Y/N	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Air to water unit	Heat pump combination heater	Y/N	No	No	No	No	No	No	No	No	No	No	No
	Rated airflow (outdoor)	[m ³ /h]	4060	4060	4060	4650	4650	4060	4060	4060	4060	4650	4650
Brine/water to water unit	Rated water/brine flow (outdoor H/E)		/	/	/	/	/	/	/	/	/	/	/
	Capacity control	-	Inverter	Inverter	Inverter	Inverter	Inverter	Inverter	Inverter	Inverter	Inverter	Inverter	Inverter
Other	P _{off} (Power consumption Off mode)	[kW]	0.014	0.014	0.014	0.014	0.014	0.02	0.02	0.02	0.02	0.02	0.02
	P _{to} (Power consumption Thermostat off mode)	[kW]	0.024	0.024	0.024	0.024	0.024	0.030	0.030	0.030	0.030	0.030	0.030
	P _{sb} (Power consumption Standby mode)	[kW]	0.014	0.014	0.014	0.014	0.014	0.014	0.02	0.02	0.02	0.02	0.02
	P _{CK} (Power crankcase heater model)	[kW]	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Q _{elec} (Daily electricity consumption)	[kWh]	/	/	/	/	/	/	/	/	/	/	/
	Q _{fuel} (Daily fuel consumption)	[kWh]	/	/	/	/	/	/	/	/	/	/	/

Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

Product fiche data according to energy label directive 2010/30/EC regulation (EU) 811/2013.

Technical parameters							
Model(s):	Outdoor unit: AW-YHPSA04-H91 Indoor unit: AW-WHPSA0406-N91						
Air-to-water heat pump:	YES						
Water-to-water heat pump:	NO						
Brine-to-water heat pump:	NO						
Low-temperature heat pump:	NO						
Equipped with a supplementary heater:	NO						
Heat pump combination heater:	NO						
Declared climate condition:	AVERAGE						
Parameters are declared for medium-temperature application.							
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	4.4	kW	Seasonal space heating energy efficiency	η_s	129.5	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	3.89	kW	Tj = -7°C	COPd	2.17	-
Tj = 2°C	Pdh	2.38	kW	Tj = 2°C	COPd	3.30	-
Tj = 7°C	Pdh	2.94	kW	Tj = 7°C	COPd	4.41	-
Tj = 12°C	Pdh	1.32	kW	Tj = 12°C	COPd	5.66	-
Tj = bivalent temperature	Pdh	3.89	kW	Tj = bivalent temperature	COPd	2.17	-
Tj = operating limit	Pdh	3.42	kW	Tj = operating limit	COPd	1.91	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	T _{biv}	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P _{cyc}	-	kW	Cycling interval efficiency	COP _{cyc}	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{off}	0.014	kW	Rated heat output (**)	P _{sup}	0.98	kW
Standby mode	P _{sb}	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	P _{to}	0.024	kW				
Crankcase heater mode	P _{ck}	0.000	kW				
Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	2770	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	38/56	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Annual energy consumption	Q _{HE}	2744	kWh				
For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							

Technical parameters							
Model(s):	Outdoor unit: AW-YHPSA04-H91 Indoor unit: AW-WHPSA0406-N91						
Air-to-water heat pump:	YES						
Water-to-water heat pump:	NO						
Brine-to-water heat pump:	NO						
Low-temperature heat pump:	NO						
Equipped with a supplementary heater:	NO						
Heat pump combination heater:	NO						
Declared climate condition:	COLDER						
Parameters are declared for medium-temperature application.							
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	3.4	kW	Seasonal space heating energy efficiency	η_s	102.1	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	2.13	kW	Tj = -7°C	COPd	2.32	-
Tj = 2°C	Pdh	1.28	kW	Tj = 2°C	COPd	2.99	-
Tj = 7°C	Pdh	1.01	kW	Tj = 7°C	COPd	3.86	-
Tj = 12°C	Pdh	1.36	kW	Tj = 12°C	COPd	6.28	-
Tj = bivalent temperature	Pdh	2.74	kW	Tj = bivalent temperature	COPd	1.74	-
Tj = operating limit	Pdh	1.64	kW	Tj = operating limit	COPd	1.02	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-15	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-22	°C
Cycling interval capacity for heating	P _{cyc}	-	kW	Cycling interval efficiency	COP _{cyc}	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	51	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{off}	0.014	kW	Rated heat output (**)	P _{sup}	1.72	kW
Standby mode	P _{sb}	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	P _{to}	0.024	kW				
Crankcase heater mode	P _{ck}	0.000	kW				
Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	2770	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	-	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Annual energy consumption	Q _{HE}	3159	kWh				
For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							

Technical parameters							
Model(s):	Outdoor unit: AW-YHPSA04-H91 Indoor unit: AW-WHPSA0406-N91						
Air-to-water heat pump:	YES						
Water-to-water heat pump:	NO						
Brine-to-water heat pump:	NO						
Low-temperature heat pump:	NO						
Equipped with a supplementary heater:	NO						
Heat pump combination heater:	NO						
Declared climate condition:	WARMER						
Parameters are declared for medium-temperature application.							
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.0	kW	Seasonal space heating energy efficiency	η_s	162.4	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	-	kW	Tj = -7°C	COPd	-	-
Tj = 2°C	Pdh	4.83	kW	Tj = 2°C	COPd	2.51	-
Tj = 7°C	Pdh	3.22	kW	Tj = 7°C	COPd	3.68	-
Tj = 12°C	Pdh	1.47	kW	Tj = 12°C	COPd	5.15	-
Tj = bivalent temperature	Pdh	3.22	kW	Tj = bivalent temperature	COPd	3.68	-
Tj = operating limit	Pdh	4.83	kW	Tj = operating limit	COPd	2.51	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	2	°C
Cycling interval capacity for heating	P _{cyc}	-	kW	Cycling interval efficiency	COP _{cyc}	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	62	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{off}	0.014	kW	Rated heat output (**)	P _{sup}	0.18	kW
Standby mode	P _{sb}	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	P _{to}	0.024	kW				
Crankcase heater mode	P _{ck}	0.000	kW				
Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	2770	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	-	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Annual energy consumption	Q _{HE}	1621	kWh				
For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh	Daily fu.5.1el consumption	Q _{fuel}	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA06-H91 Indoor unit: AW-WHPSA0406-N91						
Air-to-water heat pump:	YES						
Water-to-water heat pump:	NO						
Brine-to-water heat pump:	NO						
Low-temperature heat pump:	NO						
Equipped with a supplementary heater:	NO						
Heat pump combination heater:	NO						
Declared climate condition:	AVERAGE						
Parameters are declared for medium-temperature application.							
Technical parameters table							
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.7	kW	Seasonal space heating energy efficiency	η_s	137.9	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	5.04	kW	Tj = -7°C	COPd	2.17	-
Tj = 2°C	Pdh	3.12	kW	Tj = 2°C	COPd	3.51	-
Tj = 7°C	Pdh	2.08	kW	Tj = 7°C	COPd	4.54	-
Tj = 12°C	Pdh	1.28	kW	Tj = 12°C	COPd	5.59	-
Tj = bivalent temperature	Pdh	5.04	kW	Tj = bivalent temperature	COPd	2.17	-
Tj = operating limit	Pdh	4.52	kW	Tj = operating limit	COPd	1.91	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P _{cyh}	-	kW	Cycling interval efficiency	COP _{cyh}	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{off}	0.014	kW	Rated heat output (**)	P _{sup}	1.18	kW
Standby mode	P _{sb}	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	P _{to}	0.024	kW				
Crankcase heater mode	P _{ck}	0.000	kW				
Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	2770	m ³ /h
Sound power level, indoors/outdoors	LWA	38/58	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Annual energy consumption	Q _{HE}	3345	kWh				
For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA06-H91 Indoor unit: AW-WHPSA0406-N91		
Air-to-water heat pump:	YES		
Water-to-water heat pump:	NO		
Brine-to-water heat pump:	NO		
Low-temperature heat pump:	NO		
Equipped with a supplementary heater:	NO		
Heat pump combination heater:	NO		
Declared climate condition:	COLDER		
Parameters are declared for medium-temperature application.			
Heating parameters			
Item	Symbol	Value	Unit
Rated heat output (*)	Prated	4.3	kW
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	2.70	kW
Tj = 2 °C	Pdh	1.60	kW
Tj = 7 °C	Pdh	1.02	kW
Tj = 12 °C	Pdh	1.37	kW
Tj = bivalent temperature	Pdh	3.47	kW
Tj = operating limit	Pdh	2.09	kW
For air-to-water heat pumps: Tj = -15 °C	Pdh	-	kW
Bivalent temperature	Tbiv	-15	°C
Cycling interval capacity for heating	Pcyc	-	kW
Degradation co-efficient (**)	Cdh	0.9	--
Power consumption in modes other than active mode			
Off mode	Poff	0.014	kW
Standby mode	Psb	0.014	kW
Thermostat-off mode	Pto	0.024	kW
Crankcase heater mode	Pck	0.000	kW
Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η_s	111.1	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	COPd	2.46	-
Tj = 2 °C	COPd	3.36	-
Tj = 7 °C	COPd	3.94	-
Tj = 12 °C	COPd	6.35	-
Tj = bivalent temperature	COPd	1.86	-
Tj = operating limit	COPd	1.13	-
For air-to-water heat pumps: Tj = -15 °C	COPd	-	-
For air-to-water heat pumps: Operation limit temperature	TOL	-22	°C
Cycling interval efficiency	COP _{cyc}	-	-
Heating water operating limit temperature	WTOL	51	°C
Supplementary heater			
Rated heat output (**)	P _{sup}	5.10	kW
Type of energy input	Electrical		
Other items	Symbol	Value	Unit
Capacity control	variable		
Sound power level, indoors/outdoors	LWA	-	dB
Annual energy consumption	Q _{HE}	3681	kWh
For air-to-water heat pumps: Rated air flow rate, outdoors	-	2770	m ³ /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
For heat pump combination heater:			
Declared load profile	-		
Daily electricity consumption	Q _{elec}	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency			
Daily fuel consumption	Q _{fuel}	-	kWh
Annual fuel consumption	AFC	-	GJ
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France		

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA06-H91 Indoor unit: AW-WHPSA0406-N91
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	WARMER
Parameters are declared for medium-temperature application.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.1	kW	Seasonal space heating energy efficiency	η_s	164.7	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	-	kW	Tj = -7°C	COPd	-	-
Tj = 2°C	Pdh	5.02	kW	Tj = 2°C	COPd	2.48	-
Tj = 7°C	Pdh	3.31	kW	Tj = 7°C	COPd	3.67	-
Tj = 12°C	Pdh	1.60	kW	Tj = 12°C	COPd	5.29	-
Tj = bivalent temperature	Pdh	3.31	kW	Tj = bivalent temperature	COPd	3.67	-
Tj = operating limit	Pdh	5.02	kW	Tj = operating limit	COPd	2.48	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	2	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	62	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.014	kW	Rated heat output (**)	Psup	0	kW
Standby mode	Psb	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.024	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	LWA	-	dB
Annual energy consumption	QHE	1640	kWh
For air-to-water heat pumps: Rated air flow rate, outdoors	-	2770	m ³ /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h

For heat pump combination heater:			
Declared load profile	-		
Daily electricity consumption	Q _{elec}	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	η_{wh}	-	%
Daily fuel consumption	Q _{fuel}	-	kWh
Annual fuel consumption	AFC	-	GJ

Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France
-----------------	--

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA08-H91 Indoor unit: AW-WHPSA0810-N91						
Air-to-water heat pump:	YES						
Water-to-water heat pump:	NO						
Brine-to-water heat pump:	NO						
Low-temperature heat pump:	NO						
Equipped with a supplementary heater:	NO						
Heat pump combination heater:	NO						
Declared climate condition:	AVERAGE						
Parameters are declared for medium-temperature application.							
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.6	kW	Seasonal space heating energy efficiency	η_s	131.5	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	5.84	kW	Tj = -7°C	COPd	2.16	-
Tj = 2°C	Pdh	3.75	kW	Tj = 2°C	COPd	3.30	-
Tj = 7°C	Pdh	2.42	kW	Tj = 7°C	COPd	4.34	-
Tj = 12°C	Pdh	1.39	kW	Tj = 12°C	COPd	5.33	-
Tj = bivalent temperature	Pdh	5.84	kW	Tj = bivalent temperature	COPd	2.16	-
Tj = operating limit	Pdh	4.90	kW	Tj = operating limit	COPd	1.84	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COP _{eyc}	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.014	kW	Rated heat output (**)	Psup	1.69	kW
Standby mode	Psb	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.024	kW				
Crankcase heater mode	Pck	0.000	kW				
Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	4030	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	42/59	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Annual energy consumption	Q _{HE}	4056	kWh				
For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA08-H91 Indoor unit: AW-WHPSA0810-N91						
Air-to-water heat pump:	YES						
Water-to-water heat pump:	NO						
Brine-to-water heat pump:	NO						
Low-temperature heat pump:	NO						
Equipped with a supplementary heater:	NO						
Heat pump combination heater:	NO						
Declared climate condition:	COLDER						
Parameters are declared for medium-temperature application.							
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.8	kW	Seasonal space heating energy efficiency	η_s	112.0	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	3.86	kW	Tj = -7°C	COPd	2.48	-
Tj = 2°C	Pdh	2.21	kW	Tj = 2°C	COPd	3.35	-
Tj = 7°C	Pdh	1.44	kW	Tj = 7°C	COPd	4.11	-
Tj = 12°C	Pdh	1.46	kW	Tj = 12°C	COPd	5.92	-
Tj = bivalent temperature	Pdh	4.71	kW	Tj = bivalent temperature	COPd	1.90	-
Tj = operating limit	Pdh	2.80	kW	Tj = operating limit	COPd	1.22	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-15	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-22	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COP _{eyc}	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	51	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.014	kW	Rated heat output (**)	Psup	2.97	kW
Standby mode	Psb	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.024	kW				
Crankcase heater mode	Pck	0.000	kW				
Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	4030	m³/h
Sound power level, indoors/outdoors	LWA	-	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m³/h
Annual energy consumption	QHE	4950	kWh				
For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).							
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.							

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA08-H91 Indoor unit: AW-WHPSA0810-N91		
Air-to-water heat pump:	YES		
Water-to-water heat pump:	NO		
Brine-to-water heat pump:	NO		
Low-temperature heat pump:	NO		
Equipped with a supplementary heater:	NO		
Heat pump combination heater:	NO		
Declared climate condition:	WARMER		
Parameters are declared for medium-temperature application.			
Heating parameters			
Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.6	kW
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	-	kW
Tj = 2 °C	Pdh	7.55	kW
Tj = 7 °C	Pdh	4.86	kW
Tj = 12 °C	Pdh	2.31	kW
Tj = bivalent temperature	Pdh	4.86	kW
Tj = operating limit	Pdh	7.55	kW
For air-to-water heat pumps: Tj = -15 °C	Pdh	-	kW
Bivalent temperature	Tbiv	7	°C
Cycling interval capacity for heating	Pcyc	-	kW
Degradation co-efficient (**)	Cdh	0.9	--
Power consumption in modes other than active mode			
Off mode	Poff	0.014	kW
Standby mode	Psb	0.014	kW
Thermostat-off mode	Pto	0.024	kW
Crankcase heater mode	Pck	0.000	kW
Item	Symbol	Value	Unit
Seasonal space heating energy efficiency	η_s	175.8	%
Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	COPd	-	-
Tj = 2 °C	COPd	2.59	-
Tj = 7 °C	COPd	3.92	-
Tj = 12 °C	COPd	5.55	-
Tj = bivalent temperature	COPd	3.92	-
Tj = operating limit	COPd	2.59	-
For air-to-water heat pumps: Tj = -15 °C	COPd	-	-
For air-to-water heat pumps: Operation limit temperature	TOL	2	°C
Cycling interval efficiency	COP _{cyc}	-	-
Heating water operating limit temperature	WTOL	62	°C
Supplementary heater			
Rated heat output (**)	P _{sup}	0	kW
Type of energy input	Electrical		
Other items	Symbol	Value	Unit
Capacity control	variable		
Sound power level, indoors/outdoors	LWA	-	dB
Annual energy consumption	Q _{HE}	2259	kWh
For air-to-water heat pumps: Rated air flow rate, outdoors	-	4030	m ³ /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
For heat pump combination heater:			
Declared load profile	-		
Daily electricity consumption	Q _{elec}	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency			
Daily fuel consumption	Q _{fuel}	-	kWh
Annual fuel consumption	AFC	-	GJ
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France		

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA10-H91 Indoor unit: AW-WHPSA0810-N91
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	AVERAGE
Parameters are declared for medium-temperature application.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.7	kW	Seasonal space heating energy efficiency	η_s	136.6	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	6.78	kW	Tj = -7°C	COPd	2.24	-
Tj = 2°C	Pdh	4.28	kW	Tj = 2°C	COPd	3.42	-
Tj = 7°C	Pdh	2.77	kW	Tj = 7°C	COPd	4.52	-
Tj = 12°C	Pdh	1.58	kW	Tj = 12°C	COPd	5.68	-
Tj = bivalent temperature	Pdh	6.78	kW	Tj = bivalent temperature	COPd	2.24	-
Tj = operating limit	Pdh	5.38	kW	Tj = operating limit	COPd	1.83	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P _{cych}	-	kW	Cycling interval efficiency	COP _{cyc}	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{off}	0.014	kW	Rated heat output (**)	P _{sup}	2.29	kW
Standby mode	P _{sb}	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	P _{to}	0.024	kW				
Crankcase heater mode	P _{ck}	0.000	kW				

Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	L _{WA}	42/60	dB
Annual energy consumption	Q _{HE}	4539	kWh
For air-to-water heat pumps: Rated air flow rate, outdoors	-	4030	m ³ /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France
-----------------	--

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA10-H91 Indoor unit: AW-WHPSA0810-N91
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	COLDER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.7	kW	Seasonal space heating energy efficiency	η_s	116.4	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	4.27	kW	Tj = -7°C	COPd	2.54	-
Tj = 2°C	Pdh	2.57	kW	Tj = 2°C	COPd	3.51	-
Tj = 7°C	Pdh	1.65	kW	Tj = 7°C	COPd	4.37	-
Tj = 12°C	Pdh	1.47	kW	Tj = 12°C	COPd	5.96	-
Tj = bivalent temperature	Pdh	5.47	kW	Tj = bivalent temperature	COPd	2.00	-
Tj = operating limit	Pdh	2.80	kW	Tj = operating limit	COPd	1.22	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-15	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-22	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	51	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.014	kW	Rated heat output (**)	Psup	3.91	kW
Standby mode	Psb	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.024	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	4030	m³/h
Sound power level, indoors/outdoors	LWA	-	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m³/h
Annual energy consumption	QHE	5540	kWh				

For heat pump combination heater:

Declared load profile				Water heating energy efficiency			
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Qelec	-	kWh	Daily fuel consumption	Qfuel	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA10-H91 Indoor unit: AW-WHPSA0810-N91
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	WARMER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	8.6	kW	Seasonal space heating energy efficiency	η_s	180.3	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	-	kW	Tj = -7°C	COPd	-	-
Tj = 2°C	Pdh	8.06	kW	Tj = 2°C	COPd	2.59	-
Tj = 7°C	Pdh	5.54	kW	Tj = 7°C	COPd	4.10	-
Tj = 12°C	Pdh	2.53	kW	Tj = 12°C	COPd	5.82	-
Tj = bivalent temperature	Pdh	5.54	kW	Tj = bivalent temperature	COPd	4.10	-
Tj = operating limit	Pdh	8.15	kW	Tj = operating limit	COPd	2.61	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	2	°C
Cycling interval capacity for heating	P _{cyh}	-	kW	Cycling interval efficiency	COP _{cyh}	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	62	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{off}	0.014	kW	Rated heat output (**)	P _{sup}	0.48	kW
Standby mode	P _{sb}	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	P _{to}	0.024	kW				
Crankcase heater mode	P _{ck}	0.000	kW				

Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	LWA	-	dB
Annual energy consumption	Q _{HE}	2516	kWh
For air-to-water heat pumps: Rated air flow rate, outdoors	-	4030	m ³ /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h

For heat pump combination heater:			
Declared load profile	-		
Daily electricity consumption	Q _{elec}	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	η_{wh}	-	%
Daily fuel consumption	Q _{fuel}	-	kWh
Annual fuel consumption	AFC	-	GJ

Contact details: AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA12-H91 Indoor unit: AW-WHPSA1216-N91
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	AVERAGE

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	11.6	kW	Seasonal space heating energy efficiency	η_s	135.1	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	10.24	kW	Tj = -7°C	COPd	2.01	-
Tj = 2°C	Pdh	6.52	kW	Tj = 2°C	COPd	3.44	-
Tj = 7°C	Pdh	4.36	kW	Tj = 7°C	COPd	4.59	-
Tj = 12°C	Pdh	3.29	kW	Tj = 12°C	COPd	6.05	-
Tj = bivalent temperature	Pdh	10.24	kW	Tj = bivalent temperature	COPd	2.01	-
Tj = operating limit	Pdh	9.10	kW	Tj = operating limit	COPd	1.79	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COP _{cyc}	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.014	kW	Rated heat output (**)	Psup	1.23	kW
Standby mode	Psb	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.024	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	LWA	43/64	dB
Annual energy consumption	Q _{HE}	6927	kWh
For air-to-water heat pumps: Rated air flow rate, outdoors	-	4060	m ³ /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h

For heat pump combination heater:			
Declared load profile	-		
Daily electricity consumption	Q _{elec}	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	η_{wh}	-	%
Daily fuel consumption	Q _{fuel}	-	kWh
Annual fuel consumption	AFC	-	GJ

Contact details AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA12-H91 Indoor unit: AW-WHPSA1216-N91
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	COLDER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.3	kW	Seasonal space heating energy efficiency	η_s	117.8	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	6.63	kW	Tj = -7°C	COPd	2.63	-
Tj = 2°C	Pdh	4.06	kW	Tj = 2°C	COPd	3.60	-
Tj = 7°C	Pdh	2.78	kW	Tj = 7°C	COPd	4.54	-
Tj = 12°C	Pdh	3.33	kW	Tj = 12°C	COPd	6.25	-
Tj = bivalent temperature	Pdh	8.41	kW	Tj = bivalent temperature	COPd	1.84	-
Tj = operating limit	Pdh	4.19	kW	Tj = operating limit	COPd	1.13	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-15	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-22	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	51	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.014	kW	Rated heat output (**)	Psup	6.11	kW
Standby mode	Psb	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.024	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	4060	m ³ /h
Sound power level, indoors/outdoors	LWA	-	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Annual energy consumption	QHE	8419	kWh				

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Qelec	-	kWh	Daily fuel consumption	Qfuel	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA12-H91 Indoor unit: AW-WHPSA1216-N91
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	WARMER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.5	kW	Seasonal space heating energy efficiency	η_s	174.0	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	-	kW	Tj = -7°C	COPd	-	-
Tj = 2°C	Pdh	12.07	kW	Tj = 2°C	COPd	2.31	-
Tj = 7°C	Pdh	8.04	kW	Tj = 7°C	COPd	3.86	-
Tj = 12°C	Pdh	3.75	kW	Tj = 12°C	COPd	5.70	-
Tj = bivalent temperature	Pdh	8.04	kW	Tj = bivalent temperature	COPd	3.86	-
Tj = operating limit	Pdh	12.07	kW	Tj = operating limit	COPd	2.31	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	2	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	62	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.014	kW	Rated heat output (**)	Psup	0.43	kW
Standby mode	Psb	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.024	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	4060	m ³ /h
Sound power level, indoors/outdoors	LWA	-	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Annual energy consumption	QHE	3776	kWh				

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Qelec	-	kWh	Daily fuel consumption	Qfuel	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA14-H91 Indoor unit: AW-WHPSA1216-N91
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	AVERAGE

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.08	kW	Seasonal space heating energy efficiency	η_s	135.6	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	10.68	kW	Tj = -7°C	COPd	2.01	-
Tj = 2°C	Pdh	6.86	kW	Tj = 2°C	COPd	3.43	-
Tj = 7°C	Pdh	4.63	kW	Tj = 7°C	COPd	4.66	-
Tj = 12°C	Pdh	3.31	kW	Tj = 12°C	COPd	6.13	-
Tj = bivalent temperature	Pdh	10.68	kW	Tj = bivalent temperature	COPd	2.01	-
Tj = operating limit	Pdh	9.19	kW	Tj = operating limit	COPd	1.76	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.014	kW	Rated heat output (**)	Psup	1.40	kW
Standby mode	Psb	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.024	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	4060	m ³ /h
Sound power level, indoors/outdoors	LWA	43/65	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Annual energy consumption	QHE	7202	kWh				

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Qclec	-	kWh	Daily fuel consumption	Qfuel	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA14-H91 Indoor unit: AW-WHPSA1216-N91
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	COLDER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	11.0	kW	Seasonal space heating energy efficiency	η_s	118.9	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	6.89	kW	Tj = -7°C	COPd	2.66	-
Tj = 2°C	Pdh	4.32	kW	Tj = 2°C	COPd	3.66	-
Tj = 7°C	Pdh	3.06	kW	Tj = 7°C	COPd	4.72	-
Tj = 12°C	Pdh	3.33	kW	Tj = 12°C	COPd	6.25	-
Tj = bivalent temperature	Pdh	8.94	kW	Tj = bivalent temperature	COPd	1.79	-
Tj = operating limit	Pdh	4.20	kW	Tj = operating limit	COPd	1.13	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-15	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-22	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	51	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.014	kW	Rated heat output (**)	Psup	6.80	kW
Standby mode	Psb	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.024	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	4060	m ³ /h
Sound power level, indoors/outdoors	LWA	-	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Annual energy consumption	QHE	8866	kWh				

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Qclec	-	kWh	Daily fuel consumption	Qfuel	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA14-H91 Indoor unit: AW-WHPSA1216-N91
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	WARMER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	13.7	kW	Seasonal space heating energy efficiency	η_s	176.5	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	-	kW	Tj = -7°C	COPd	-	-
Tj = 2°C	Pdh	13.04	kW	Tj = 2°C	COPd	2.20	-
Tj = 7°C	Pdh	8.83	kW	Tj = 7°C	COPd	3.91	-
Tj = 12°C	Pdh	4.08	kW	Tj = 12°C	COPd	5.90	-
Tj = bivalent temperature	Pdh	8.83	kW	Tj = bivalent temperature	COPd	3.91	-
Tj = operating limit	Pdh	13.04	kW	Tj = operating limit	COPd	2.20	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	2	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	62	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.014	kW	Rated heat output (**)	Psup	0.66	kW
Standby mode	Psb	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.024	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	4060	m ³ /h
Sound power level, indoors/outdoors	LWA	-	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Annual energy consumption	QHE	4088	kWh				

For heat pump combination heater:

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Qclec	-	kWh	Daily fuel consumption	Qfuel	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA16-H91 Indoor unit: AW-WHPSA1216-N91
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	AVERAGE

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	13.0	kW	Seasonal space heating energy efficiency	η_s	133.3	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	11.52	kW	Tj = -7°C	COPd	1.99	-
Tj = 2°C	Pdh	7.18	kW	Tj = 2°C	COPd	3.34	-
Tj = 7°C	Pdh	4.67	kW	Tj = 7°C	COPd	4.61	-
Tj = 12°C	Pdh	3.31	kW	Tj = 12°C	COPd	6.07	-
Tj = bivalent temperature	Pdh	11.52	kW	Tj = bivalent temperature	COPd	1.99	-
Tj = operating limit	Pdh	10.33	kW	Tj = operating limit	COPd	1.80	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.014	kW	Rated heat output (**)	Psup	2.68	kW
Standby mode	Psb	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.024	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	4650	m ³ /h
Sound power level, indoors/outdoors	LWA	43/68	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Annual energy consumption	QHE	7895	kWh				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Q _{elec}	-	kWh	Daily fuel consumption	Q _{fuel}	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA16-H91 Indoor unit: AW-WHPSA1216-N91
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	COLDER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	11.8	kW	Seasonal space heating energy efficiency	η_s	121.8	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	7.64	kW	Tj = -7°C	COPd	2.65	-
Tj = 2°C	Pdh	4.42	kW	Tj = 2°C	COPd	3.79	-
Tj = 7°C	Pdh	2.97	kW	Tj = 7°C	COPd	4.81	-
Tj = 12°C	Pdh	3.43	kW	Tj = 12°C	COPd	6.29	-
Tj = bivalent temperature	Pdh	9.61	kW	Tj = bivalent temperature	COPd	1.86	-
Tj = operating limit	Pdh	5.21	kW	Tj = operating limit	COPd	1.23	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-15	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-22	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	51	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.014	kW	Rated heat output (**)	Psup	6.59	kW
Standby mode	Psb	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.024	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	4650	m ³ /h
Sound power level, indoors/outdoors	LWA	-	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Annual energy consumption	QHE	9309	kWh				

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Qelec	-	kWh	Daily fuel consumption	Qfuel	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA16-H91 Indoor unit: AW-WHPSA1216-N91
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	WARMER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	13.8	kW	Seasonal space heating energy efficiency	η_s	176.1	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	-	kW	Tj = -7°C	COPd	-	-
Tj = 2°C	Pdh	13.38	kW	Tj = 2°C	COPd	2.29	-
Tj = 7°C	Pdh	8.86	kW	Tj = 7°C	COPd	3.84	-
Tj = 12°C	Pdh	4.06	kW	Tj = 12°C	COPd	5.86	-
Tj = bivalent temperature	Pdh	8.86	kW	Tj = bivalent temperature	COPd	3.84	-
Tj = operating limit	Pdh	13.38	kW	Tj = operating limit	COPd	2.29	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	2	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	62	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.014	kW	Rated heat output (**)	Psup	0.42	kW
Standby mode	Psb	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.024	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	4650	m ³ /h
Sound power level, indoors/outdoors	LWA	-	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Annual energy consumption	QHE	4112	kWh				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Qelec	-	kWh	Daily fuel consumption	Qfuel	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA12-H93 Indoor unit: AW-WHPSA1216-N93
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	AVERAGE

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	11.6	kW	Seasonal space heating energy efficiency	η_s	135.1	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	10.24	kW	Tj = -7°C	COPd	2.01	-
Tj = 2°C	Pdh	6.52	kW	Tj = 2°C	COPd	3.44	-
Tj = 7°C	Pdh	4.36	kW	Tj = 7°C	COPd	4.59	-
Tj = 12°C	Pdh	3.29	kW	Tj = 12°C	COPd	6.05	-
Tj = bivalent temperature	Pdh	10.24	kW	Tj = bivalent temperature	COPd	2.01	-
Tj = operating limit	Pdh	9.10	kW	Tj = operating limit	COPd	1.79	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P _{cyh}	-	kW	Cycling interval efficiency	COP _{cyh}	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{off}	0.020	kW	Rated heat output (**)	P _{sup}	1.23	kW
Standby mode	P _{sb}	0.020	kW	Type of energy input	Electrical		
Thermostat-off mode	P _{to}	0.030	kW				
Crankcase heater mode	P _{ck}	0.000	kW				

Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	L _{WA}	43/64	dB
Annual energy consumption	Q _{HE}	6928	kWh
For air-to-water heat pumps: Rated air flow rate, outdoors	-	4060	m ³ /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h

For heat pump combination heater:			
Declared load profile	-		
Daily electricity consumption	Q _{elec}	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	η_{wh}	-	%
Daily fuel consumption	Q _{fuel}	-	kWh
Annual fuel consumption	AFC	-	GJ

Contact details AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA12-H93 Indoor unit: AW-WHPSA1216-N93
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	COLDER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.3	kW	Seasonal space heating energy efficiency	η_s	117.7	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	6.63	kW	Tj = -7°C	COPd	2.63	-
Tj = 2°C	Pdh	4.06	kW	Tj = 2°C	COPd	3.60	-
Tj = 7°C	Pdh	2.78	kW	Tj = 7°C	COPd	4.54	-
Tj = 12°C	Pdh	3.33	kW	Tj = 12°C	COPd	6.25	-
Tj = bivalent temperature	Pdh	8.41	kW	Tj = bivalent temperature	COPd	1.84	-
Tj = operating limit	Pdh	4.19	kW	Tj = operating limit	COPd	1.13	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-15	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-22	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	51	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.020	kW	Rated heat output (**)	Psup	6.11	kW
Standby mode	Psb	0.020	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.030	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	LWA	-	dB
Annual energy consumption	QHE	8420	kWh
For air-to-water heat pumps: Rated air flow rate, outdoors	-	4060	m ³ /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Qclec	-	kWh	Daily fuel consumption	Qfuel	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA12-H93 Indoor unit: AW-WHPSA1216-N93
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	WARMER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.5	kW	Seasonal space heating energy efficiency	η_s	173.8	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	-	kW	Tj = -7 °C	COPd	-	-
Tj = 2 °C	Pdh	12.07	kW	Tj = 2 °C	COPd	2.31	-
Tj = 7 °C	Pdh	8.04	kW	Tj = 7 °C	COPd	3.86	-
Tj = 12 °C	Pdh	3.75	kW	Tj = 12 °C	COPd	5.70	-
Tj = bivalent temperature	Pdh	8.04	kW	Tj = bivalent temperature	COPd	3.86	-
Tj = operating limit	Pdh	12.07	kW	Tj = operating limit	COPd	2.31	-
For air-to-water heat pumps: Tj = -15 °C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15 °C	COPd	-	-
Bivalent temperature	Tbiv	7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	2	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	62	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.020	kW	Rated heat output (**)	Psup	0.43	kW
Standby mode	Psb	0.020	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.030	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	4060	m ³ /h
Sound power level, indoors/outdoors	LWA	-	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Annual energy consumption	QHE	3780	kWh				

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Qelec	-	kWh	Daily fuel consumption	Qfuel	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details: AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA14-H93 Indoor unit: AW-WHPSA1216-N93
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	AVERAGE

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.08	kW	Seasonal space heating energy efficiency	η_s	135.6	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	10.68	kW	Tj = -7°C	COPd	2.01	-
Tj = 2°C	Pdh	6.86	kW	Tj = 2°C	COPd	3.43	-
Tj = 7°C	Pdh	4.63	kW	Tj = 7°C	COPd	4.66	-
Tj = 12°C	Pdh	3.31	kW	Tj = 12°C	COPd	6.13	-
Tj = bivalent temperature	Pdh	10.68	kW	Tj = bivalent temperature	COPd	2.01	-
Tj = operating limit	Pdh	9.19	kW	Tj = operating limit	COPd	1.76	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.020	kW	Rated heat output (**)	Psup	1.40	kW
Standby mode	Psb	0.020	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.030	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	4060	m ³ /h
Sound power level, indoors/outdoors	LWA	43/65	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Annual energy consumption	QHE	7203	kWh				

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Qelec	-	kWh	Daily fuel consumption	Qfuel	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA14-H93 Indoor unit: AW-WHPSA1216-N93
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	COLDER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	11.0	kW	Seasonal space heating energy efficiency	η_s	118.9	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	6.89	kW	Tj = -7°C	COPd	2.66	-
Tj = 2°C	Pdh	4.32	kW	Tj = 2°C	COPd	3.66	-
Tj = 7°C	Pdh	3.06	kW	Tj = 7°C	COPd	4.72	-
Tj = 12°C	Pdh	3.33	kW	Tj = 12°C	COPd	6.25	-
Tj = bivalent temperature	Pdh	8.94	kW	Tj = bivalent temperature	COPd	1.79	-
Tj = operating limit	Pdh	4.20	kW	Tj = operating limit	COPd	1.13	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-15	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-22	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	51	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.020	kW	Rated heat output (**)	Psup	6.80	kW
Standby mode	Psb	0.020	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.030	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	4060	m ³ /h
Sound power level, indoors/outdoors	LWA	-	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Annual energy consumption	QHE	8867	kWh				

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Qelec	-	kWh	Daily fuel consumption	Qfuel	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA14-H93 Indoor unit: AW-WHPSA1216-N93
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	WARMER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	13.7	kW	Seasonal space heating energy efficiency	η_s	176.4	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	-	kW	Tj = -7°C	COPd	-	-
Tj = 2°C	Pdh	13.04	kW	Tj = 2°C	COPd	2.20	-
Tj = 7°C	Pdh	8.83	kW	Tj = 7°C	COPd	3.91	-
Tj = 12°C	Pdh	4.08	kW	Tj = 12°C	COPd	5.90	-
Tj = bivalent temperature	Pdh	8.83	kW	Tj = bivalent temperature	COPd	3.91	-
Tj = operating limit	Pdh	13.04	kW	Tj = operating limit	COPd	2.20	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	2	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	62	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.020	kW	Rated heat output (**)	Psup	0.66	kW
Standby mode	Psb	0.020	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.030	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	4060	m ³ /h
Sound power level, indoors/outdoors	LWA	-	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Annual energy consumption	QHE	4092	kWh				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Qelec	-	kWh	Daily fuel consumption	Qfuel	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA16-H93 Indoor unit: AW-WHPSA1216-N93
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	AVERAGE

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	13.0	kW	Seasonal space heating energy efficiency	η_s	133.2	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	11.52	kW	Tj = -7°C	COPd	1.99	-
Tj = 2°C	Pdh	7.18	kW	Tj = 2°C	COPd	3.34	-
Tj = 7°C	Pdh	4.67	kW	Tj = 7°C	COPd	4.61	-
Tj = 12°C	Pdh	3.31	kW	Tj = 12°C	COPd	6.07	-
Tj = bivalent temperature	Pdh	11.52	kW	Tj = bivalent temperature	COPd	1.99	-
Tj = operating limit	Pdh	10.33	kW	Tj = operating limit	COPd	1.80	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.020	kW	Rated heat output (**)	Psup	2.67	kW
Standby mode	Psb	0.020	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.030	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	4650	m ³ /h
Sound power level, indoors/outdoors	LWA	43/68	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h
Annual energy consumption	QHE	7896	kWh				

For heat pump combination heater:

Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Qelec	-	kWh	Daily fuel consumption	Qfuel	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA16-H93 Indoor unit: AW-WHPSA1216-N93
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	COLDER
Parameters are declared for medium-temperature application.	

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	11.8	kW	Seasonal space heating energy efficiency	η_s	121.8	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	7.64	kW	Tj = -7°C	COPd	2.65	-
Tj = 2°C	Pdh	4.42	kW	Tj = 2°C	COPd	3.79	-
Tj = 7°C	Pdh	2.97	kW	Tj = 7°C	COPd	4.81	-
Tj = 12°C	Pdh	3.43	kW	Tj = 12°C	COPd	6.29	-
Tj = bivalent temperature	Pdh	9.61	kW	Tj = bivalent temperature	COPd	1.86	-
Tj = operating limit	Pdh	5.21	kW	Tj = operating limit	COPd	1.23	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-15	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-22	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	51	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.020	kW	Rated heat output (**)	Psup	6.59	kW
Standby mode	Psb	0.020	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.030	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items							
Capacity control	variable			For air-to-water heat pumps: Rated air flow rate, outdoors	-	4650	m³/h
Sound power level, indoors/outdoors	LWA	-	dB	For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m³/h
Annual energy consumption	QHE	9310	kWh				

For heat pump combination heater:							
Declared load profile	-			Water heating energy efficiency	η_{wh}	-	%
Daily electricity consumption	Qdec	-	kWh	Daily fuel consumption	Qfuel	-	kWh
Annual electricity consumption	AEC	-	kWh	Annual fuel consumption	AFC	-	GJ

Contact details: AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA16-H93 Indoor unit: AW-WHPSA1216-N93
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	WARMER

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	13.8	kW	Seasonal space heating energy efficiency	η_s	175.9	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	-	kW	Tj = -7°C	COPd	-	-
Tj = 2°C	Pdh	13.38	kW	Tj = 2°C	COPd	2.29	-
Tj = 7°C	Pdh	8.86	kW	Tj = 7°C	COPd	3.84	-
Tj = 12°C	Pdh	4.06	kW	Tj = 12°C	COPd	5.86	-
Tj = bivalent temperature	Pdh	8.86	kW	Tj = bivalent temperature	COPd	3.84	-
Tj = operating limit	Pdh	13.38	kW	Tj = operating limit	COPd	2.29	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	2	°C
Cycling interval capacity for heating	Pcyc	-	kW	Cycling interval efficiency	COPcyc	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	62	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	Poff	0.014	kW	Rated heat output (**)	Psup	0.42	kW
Standby mode	Psb	0.014	kW	Type of energy input	Electrical		
Thermostat-off mode	Pto	0.029	kW				
Crankcase heater mode	Pck	0.000	kW				

Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	LWA	-	dB
Annual energy consumption	QHE	4116	kWh
For air-to-water heat pumps: Rated air flow rate, outdoors	-	4650	m³/h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m³/h

For heat pump combination heater:			
Declared load profile	-		
Daily electricity consumption	Qelec	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	η_{wh}	-	%
Daily fuel consumption	Qfuel	-	kWh
Annual fuel consumption	AFC	-	GJ

Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France
-----------------	--

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Information requirements for comfort chillers

Model(s):	Outdoor unit: AW-YHPA04-H91 Indoor unit: AW-WHPA0406-N91						
Outdoor side heat exchanger of chiller:	Air to water						
Indoor side heat exchanger chiller:	Water						
Type:	Compressor driven vapour compression						
Driver of compressor:	Electric motor						
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{\text{Rated,c}}$	4.7	kW	Seasonal space cooling energy efficiency	$\eta_{\text{s,c}}$	196.5	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^\circ\text{C}$	P_{dc}	4.66	kW	$T_j=+35^\circ\text{C}$	EER_d	3.52	-
$T_j=+30^\circ\text{C}$	P_{dc}	3.66	kW	$T_j=+30^\circ\text{C}$	EER_d	4.76	-
$T_j=+25^\circ\text{C}$	P_{dc}	2.21	kW	$T_j=+25^\circ\text{C}$	EER_d	5.72	-
$T_j=+20^\circ\text{C}$	P_{dc}	0.94	kW	$T_j=+20^\circ\text{C}$	EER_d	5.72	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.014	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	2770	m^3/h
Sound power level, indoors / outdoors	L_{WA}	38/56	dB				
Emissions of nitrogen oxides (if applicable)	$\text{NO}_x(**)$	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m^3/h
GWP of the refrigerant	-	675	kg CO_2 eq (100years)				
Standard rating conditions used	Low temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Information requirements for comfort chillers

Model(s):	Outdoor unit: AW-YHPSA04-H91 Indoor unit: AW-WHPSA0406-N91
Outdoor side heat exchanger of chiller:	Air to water
Indoor side heat exchanger chiller:	Water
Type:	Compressor driven vapour compression
Driver of compressor:	Electric motor

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	4.5	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	307.7	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^{\circ}\text{C}$	P_{dc}	4.51	kW	$T_j=+35^{\circ}\text{C}$	EER_d	5.54	-
$T_j=+30^{\circ}\text{C}$	P_{dc}	3.44	kW	$T_j=+30^{\circ}\text{C}$	EER_d	7.23	-
$T_j=+25^{\circ}\text{C}$	P_{dc}	2.19	kW	$T_j=+25^{\circ}\text{C}$	EER_d	8.94	-
$T_j=+20^{\circ}\text{C}$	P_{dc}	1.13	kW	$T_j=+20^{\circ}\text{C}$	EER_d	10.48	-

Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
---	----------	-----	---	--	--	--	--

Power consumption in modes other than "active mode"

Off mode	P_{OFF}	0.014	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.014	kW

Other items

Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	2770	m^3/h
Sound power level, indoors / outdoors	L_{WA}	38/55	dB				
Emissions of nitrogen oxides (if applicable)	$\text{NO}_x(**)$	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m^3/h
GWP of the refrigerant	-	675	kg CO_2 eq (100years)				

Standard rating conditions used	Medium temperature application
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France

(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9.
(**) From 26 September 2018.

Information requirements for comfort chillers

Model(s):				Outdoor unit: AW-YHPA06-H91 Indoor unit: AW-WHPA0406-N91			
Outdoor side heat exchanger of chiller:				Air to water			
Indoor side heat exchanger chiller:				Water			
Type:				Compressor driven vapour compression			
Driver of compressor:				Electric motor			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	6.3	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	210.7	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^\circ\text{C}$	P_{dc}	6.35	kW	$T_j=+35^\circ\text{C}$	EER_d	2.93	-
$T_j=+30^\circ\text{C}$	P_{dc}	4.76	kW	$T_j=+30^\circ\text{C}$	EER_d	4.53	-
$T_j=+25^\circ\text{C}$	P_{dc}	3.02	kW	$T_j=+25^\circ\text{C}$	EER_d	6.32	-
$T_j=+20^\circ\text{C}$	P_{dc}	1.39	kW	$T_j=+20^\circ\text{C}$	EER_d	7.20	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.014	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	2770	m ³ /h
Sound power level, indoors /outdoors	L_{WA}	38/58	dB				
Emissions of nitrogen oxides (if applicable)	$NO_x(**)$	-	mg/kWh input GCV	For water /brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m ³ /h
GWP of the refrigerant	-	675	kg CO ₂ eq (100years)				
Standard rating conditions used	Low temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Information requirements for comfort chillers

Model(s):				Outdoor unit: AW-YHPSA06-H91 Indoor unit: AW-WHPSA0406-N91			
Outdoor side heat exchanger of chiller:				Air to water			
Indoor side heat exchanger chiller:				Water			
Type:				Compressor driven vapour compression			
Driver of compressor:				Electric motor			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	6.5	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	325.2	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^\circ\text{C}$	P_{dc}	6.55	kW	$T_j=+35^\circ\text{C}$	EER_d	4.69	-
$T_j=+30^\circ\text{C}$	P_{dc}	4.84	kW	$T_j=+30^\circ\text{C}$	EER_d	7.16	-
$T_j=+25^\circ\text{C}$	P_{dc}	3.26	kW	$T_j=+25^\circ\text{C}$	EER_d	9.64	-
$T_j=+20^\circ\text{C}$	P_{dc}	1.41	kW	$T_j=+20^\circ\text{C}$	EER_d	11.48	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.014	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	2770	m ³ /h
Sound power level, indoors / outdoors	L_{WA}	38/58	dB				
Emissions of nitrogen oxides (if applicable)	$NO_x(**)$	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m ³ /h
GWP of the refrigerant	-	675	kg CO ₂ eq (100years)				
Standard rating conditions used	Medium temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Information requirements for comfort chillers

Model(s):	Outdoor unit: AW-YHPSA08-H91 Indoor unit: AW-WHPSA0810-N91						
Outdoor side heat exchanger of chiller:	Air to water						
Indoor side heat exchanger chiller:	Water						
Type:	Compressor driven vapour compression						
Driver of compressor:	Electric motor						
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	7.4	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	230.1	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^\circ\text{C}$	P_{dc}	7.38	kW	$T_j=+35^\circ\text{C}$	EER_d	3.39	-
$T_j=+30^\circ\text{C}$	P_{dc}	5.72	kW	$T_j=+30^\circ\text{C}$	EER_d	4.71	-
$T_j=+25^\circ\text{C}$	P_{dc}	3.62	kW	$T_j=+25^\circ\text{C}$	EER_d	6.65	-
$T_j=+20^\circ\text{C}$	P_{dc}	1.64	kW	$T_j=+20^\circ\text{C}$	EER_d	8.55	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.014	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	4030	m^3/h
Sound power level, indoors / outdoors	L_{WA}	42/60	dB				
Emissions of nitrogen oxides (if applicable)	$\text{NO}_x (**)$	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m^3/h
GWP of the refrigerant	-	675	kg $\text{CO}_2 \text{ eq}$ (100years)				
Standard rating conditions used	Low temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Information requirements for comfort chillers

Model(s):	Outdoor unit: AW-YHPSA08-H91 Indoor unit: AW-WHPSA0810-N91						
Outdoor side heat exchanger of chiller:	Air to water						
Indoor side heat exchanger chiller:	Water						
Type:	Compressor driven vapour compression						
Driver of compressor:	Electric motor						
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	8.4	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	355.1	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^\circ\text{C}$	P_{dc}	8.37	kW	$T_j=+35^\circ\text{C}$	EER_d	5.09	-
$T_j=+30^\circ\text{C}$	P_{dc}	6.47	kW	$T_j=+30^\circ\text{C}$	EER_d	7.02	-
$T_j=+25^\circ\text{C}$	P_{dc}	4.31	kW	$T_j=+25^\circ\text{C}$	EER_d	10.67	-
$T_j=+20^\circ\text{C}$	P_{dc}	1.80	kW	$T_j=+20^\circ\text{C}$	EER_d	13.61	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.014	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	4030	m^3/h
Sound power level, indoors / outdoors	L_{WA}	42/60	dB				
Emissions of nitrogen oxides (if applicable)	$\text{NO}_x(**)$	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m^3/h
GWP of the refrigerant	-	675	kg CO_2 eq (100years)				
Standard rating conditions used	Medium temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Information requirements for comfort chillers

Model(s):				Outdoor unit: AW-YHPSA10-H91 Indoor unit: AW-WHPSA0810-N91			
Outdoor side heat exchanger of chiller:				Air to water			
Indoor side heat exchanger chiller:				Water			
Type:				Compressor driven vapour compression			
Driver of compressor:				Electric motor			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	8.7	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	236.2	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^\circ\text{C}$	P_{dc}	8.73	kW	$T_j=+35^\circ\text{C}$	EER_d	3.21	-
$T_j=+30^\circ\text{C}$	P_{dc}	6.68	kW	$T_j=+30^\circ\text{C}$	EER_d	4.47	-
$T_j=+25^\circ\text{C}$	P_{dc}	4.26	kW	$T_j=+25^\circ\text{C}$	EER_d	7.02	-
$T_j=+20^\circ\text{C}$	P_{dc}	1.94	kW	$T_j=+20^\circ\text{C}$	EER_d	9.54	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.014	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	4030	m^3/h
Sound power level, indoors / outdoors	L_{WA}	42/61	dB				
Emissions of nitrogen oxides (if applicable)	$\text{NO}_x(**)$	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m^3/h
GWP of the refrigerant	-	675	kg CO_2 eq (100years)				
Standard rating conditions used	Low temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Information requirements for comfort chillers

Model(s):	Outdoor unit: AW-YHPSA10-H91 Indoor unit: AW-WHPSA0810-N91						
Outdoor side heat exchanger of chiller:	Air to water						
Indoor side heat exchanger chiller:	Water						
Type:	Compressor driven vapour compression						
Driver of compressor:	Electric motor						
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{\text{rated,c}}$	10.0	kW	Seasonal space cooling energy efficiency	$\eta_{\text{s,c}}$	348.1	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^\circ\text{C}$	P_{dc}	10.01	kW	$T_j=+35^\circ\text{C}$	EER_d	4.64	-
$T_j=+30^\circ\text{C}$	P_{dc}	7.71	kW	$T_j=+30^\circ\text{C}$	EER_d	6.45	-
$T_j=+25^\circ\text{C}$	P_{dc}	5.03	kW	$T_j=+25^\circ\text{C}$	EER_d	10.36	-
$T_j=+20^\circ\text{C}$	P_{dc}	2.32	kW	$T_j=+20^\circ\text{C}$	EER_d	14.98	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.014	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	4030	m^3/h
Sound power level, indoors / outdoors	L_{WA}	42/60	dB				
Emissions of nitrogen oxides (if applicable)	$\text{NO}_x(**)$	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m^3/h
GWP of the refrigerant	-	675	kg CO_2 eq (100years)				
Standard rating conditions used	Medium temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Information requirements for comfort chillers

Model(s):				Outdoor unit: AW-YHPSA12-H91 Indoor unit: AW-WHPSA1216-N91			
Outdoor side heat exchanger of chiller:				Air to water			
Indoor side heat exchanger chiller:				Water			
Type:				Compressor driven vapour compression			
Driver of compressor:				Electric motor			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	11.3	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	192.4	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^\circ\text{C}$	P_{dc}	11.31	kW	$T_j=+35^\circ\text{C}$	EER_d	2.61	-
$T_j=+30^\circ\text{C}$	P_{dc}	8.76	kW	$T_j=+30^\circ\text{C}$	EER_d	3.93	-
$T_j=+25^\circ\text{C}$	P_{dc}	5.81	kW	$T_j=+25^\circ\text{C}$	EER_d	5.73	-
$T_j=+20^\circ\text{C}$	P_{dc}	2.63	kW	$T_j=+20^\circ\text{C}$	EER_d	6.75	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.014	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	4060	m ³ /h
Sound power level, indoors / outdoors	L_{WA}	43/65	dB				
Emissions of nitrogen oxides (if applicable)	$NO_x(**)$	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m ³ /h
GWP of the refrigerant	-	675	kg CO ₂ eq (100years)				
Standard rating conditions used	Low temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Information requirements for comfort chillers

Model(s):				Outdoor unit: AW-YHPSA12-H91 Indoor unit: AW-WHPSA1216-N91			
Outdoor side heat exchanger of chiller:				Air to water			
Indoor side heat exchanger chiller:				Water			
Type:				Compressor driven vapour compression			
Driver of compressor:				Electric motor			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	11.8	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	280.9	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^{\circ}\text{C}$	P_{dc}	11.77	kW	$T_j=+35^{\circ}\text{C}$	EER _d	3.87	-
$T_j=+30^{\circ}\text{C}$	P_{dc}	9.21	kW	$T_j=+30^{\circ}\text{C}$	EER _d	5.50	-
$T_j=+25^{\circ}\text{C}$	P_{dc}	5.74	kW	$T_j=+25^{\circ}\text{C}$	EER _d	8.66	-
$T_j=+20^{\circ}\text{C}$	P_{dc}	3.33	kW	$T_j=+20^{\circ}\text{C}$	EER _d	10.07	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.014	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	4060	m ³ /h
Sound power level, indoors / outdoors	L_{WA}	43/64	dB				
Emissions of nitrogen oxides (if applicable)	$NO_x(**)$	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m ³ /h
GWP of the refrigerant	-	675	kg CO ₂ eq (100years)				
Standard rating conditions used	Medium temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Information requirements for comfort chillers

Model(s):	Outdoor unit: AW-YHPSA14-H91 Indoor unit: AW-WHPSA1216-N91						
Outdoor side heat exchanger of chiller:	Air to water						
Indoor side heat exchanger chiller:	Water						
Type:	Compressor driven vapour compression						
Driver of compressor:	Electric motor						
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	12.2	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	191.4	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^\circ\text{C}$	P_{dc}	12.19	kW	$T_j=+35^\circ\text{C}$	EER _d	2.46	-
$T_j=+30^\circ\text{C}$	P_{dc}	9.41	kW	$T_j=+30^\circ\text{C}$	EER _d	3.85	-
$T_j=+25^\circ\text{C}$	P_{dc}	6.16	kW	$T_j=+25^\circ\text{C}$	EER _d	5.80	-
$T_j=+20^\circ\text{C}$	P_{dc}	2.63	kW	$T_j=+20^\circ\text{C}$	EER _d	6.74	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.014	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	4060	m ³ /h
Sound power level, indoors / outdoors	LWA	44/65	dB				
Emissions of nitrogen oxides (if applicable)	NO _x (**)	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m ³ /h
GWP of the refrigerant	-	675	kg CO ₂ eq (100years)				
Standard rating conditions used	Low temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Information requirements for comfort chillers

Model(s):				Outdoor unit: AW-YHPSA14-H91 Indoor unit: AW-WHPSA1216-N91			
Outdoor side heat exchanger of chiller:				Air to water			
Indoor side heat exchanger chiller:				Water			
Type:				Compressor driven vapour compression			
Driver of compressor:				Electric motor			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	13.3	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	272.8	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^\circ\text{C}$	P_{dc}	13.30	kW	$T_j=+35^\circ\text{C}$	EER_d	3.47	-
$T_j=+30^\circ\text{C}$	P_{dc}	10.20	kW	$T_j=+30^\circ\text{C}$	EER_d	5.26	-
$T_j=+25^\circ\text{C}$	P_{dc}	6.57	kW	$T_j=+25^\circ\text{C}$	EER_d	8.45	-
$T_j=+20^\circ\text{C}$	P_{dc}	3.33	kW	$T_j=+20^\circ\text{C}$	EER_d	10.07	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.014	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	4060	m^3/h
Sound power level, indoors / outdoors	L_{WA}	44/64	dB				
Emissions of nitrogen oxides (if applicable)	$\text{NO}_x (**)$	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m^3/h
GWP of the refrigerant	-	675	kg CO_2 eq (100years)				
Standard rating conditions used	Medium temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Information requirements for comfort chillers

Model(s):				Outdoor unit: AW-YHPSA16-H91 Indoor unit: AW-WHPSA1216-N91			
Outdoor side heat exchanger of chiller:				Air to water			
Indoor side heat exchanger chiller:				Water			
Type:				Compressor driven vapour compression			
Driver of compressor:				Electric motor			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	14.3	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	184.4	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^\circ\text{C}$	P_{dc}	14.31	kW	$T_j=+35^\circ\text{C}$	EER _d	2.47	-
$T_j=+30^\circ\text{C}$	P_{dc}	10.68	kW	$T_j=+30^\circ\text{C}$	EER _d	3.63	-
$T_j=+25^\circ\text{C}$	P_{dc}	6.76	kW	$T_j=+25^\circ\text{C}$	EER _d	5.27	-
$T_j=+20^\circ\text{C}$	P_{dc}	3.41	kW	$T_j=+20^\circ\text{C}$	EER _d	7.29	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.014	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	4650	m ³ /h
Sound power level, indoors / outdoors	LWA	44/68	dB				
Emissions of nitrogen oxides (if applicable)	NO _x (**)	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m ³ /h
GWP of the refrigerant	-	675	kg CO ₂ eq (100years)				
Standard rating conditions used	Low temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Information requirements for comfort chillers

Model(s):				Outdoor unit: AW-YHPSA16-H91 Indoor unit: AW-WHPSA1216-N91			
Outdoor side heat exchanger of chiller:				Air to water			
Indoor side heat exchanger chiller:				Water			
Type:				Compressor driven vapour compression			
Driver of compressor:				Electric motor			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{\text{rated,c}}$	15.4	kW	Seasonal space cooling energy efficiency	$\eta_{\text{s,c}}$	266.9	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^\circ\text{C}$	P_{dc}	15.40	kW	$T_j=+35^\circ\text{C}$	EER_d	3.50	-
$T_j=+30^\circ\text{C}$	P_{dc}	11.42	kW	$T_j=+30^\circ\text{C}$	EER_d	5.14	-
$T_j=+25^\circ\text{C}$	P_{dc}	7.27	kW	$T_j=+25^\circ\text{C}$	EER_d	7.83	-
$T_j=+20^\circ\text{C}$	P_{dc}	3.40	kW	$T_j=+20^\circ\text{C}$	EER_d	10.35	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.014	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.014	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	4650	m ³ /h
Sound power level, indoors / outdoors	L_{WA}	44/67	dB				
Emissions of nitrogen oxides (if applicable)	NO_x (**)	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m ³ /h
GWP of the refrigerant	-	675	kg CO ₂ eq (100years)				
Standard rating conditions used	Medium temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Information requirements for comfort chillers

Model(s):				Outdoor unit: AW-YHPSA12-H93 Indoor unit: AW-WHPSA1216-N93			
Outdoor side heat exchanger of chiller:				Air to water			
Indoor side heat exchanger chiller:				Water			
Type:				Compressor driven vapour compression			
Driver of compressor:				Electric motor			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	11.3	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	191.2	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^\circ\text{C}$	P_{dc}	11.31	kW	$T_j=+35^\circ\text{C}$	EER _d	2.61	-
$T_j=+30^\circ\text{C}$	P_{dc}	8.76	kW	$T_j=+30^\circ\text{C}$	EER _d	3.93	-
$T_j=+25^\circ\text{C}$	P_{dc}	5.81	kW	$T_j=+25^\circ\text{C}$	EER _d	5.73	-
$T_j=+20^\circ\text{C}$	P_{dc}	2.63	kW	$T_j=+20^\circ\text{C}$	EER _d	6.75	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.020	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.020	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	4060	m ³ /h
Sound power level, indoors / outdoors	LWA	43/65	dB				
Emissions of nitrogen oxides (if applicable)	NO _x (**)	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m ³ /h
GWP of the refrigerant	-	675	kg CO ₂ eq (100years)				
Standard rating conditions used	Low temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Information requirements for comfort chillers

Model(s):				Outdoor unit: AW-YHPSA12-H93 Indoor unit: AW-WHPSA1216-N93			
Outdoor side heat exchanger of chiller:				Air to water			
Indoor side heat exchanger chiller:				Water			
Type:				Compressor driven vapour compression			
Driver of compressor:				Electric motor			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	11.8	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	278.6	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^{\circ}\text{C}$	P_{dc}	11.77	kW	$T_j=+35^{\circ}\text{C}$	EER_d	3.87	-
$T_j=+30^{\circ}\text{C}$	P_{dc}	9.21	kW	$T_j=+30^{\circ}\text{C}$	EER_d	5.50	-
$T_j=+25^{\circ}\text{C}$	P_{dc}	5.74	kW	$T_j=+25^{\circ}\text{C}$	EER_d	8.66	-
$T_j=+20^{\circ}\text{C}$	P_{dc}	3.33	kW	$T_j=+20^{\circ}\text{C}$	EER_d	10.07	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.020	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.020	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	4060	m^3/h
Sound power level, indoors / outdoors	L_{WA}	43/64	dB				
Emissions of nitrogen oxides (if applicable)	$\text{NO}_x(**)$	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m^3/h
GWP of the refrigerant	-	675	kg CO_2 eq (100years)				
Standard rating conditions used	Medium temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Information requirements for comfort chillers

Model(s):	Outdoor unit: AW-YHPSA14-H93 Indoor unit: AW-WHPSA1216-N93						
Outdoor side heat exchanger of chiller:	Air to water						
Indoor side heat exchanger chiller:	Water						
Type:	Compressor driven vapour compression						
Driver of compressor:	Electric motor						
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	12.2	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	190.3	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^\circ\text{C}$	P_{dc}	12.19	kW	$T_j=+35^\circ\text{C}$	EER_d	2.46	-
$T_j=+30^\circ\text{C}$	P_{dc}	9.41	kW	$T_j=+30^\circ\text{C}$	EER_d	3.85	-
$T_j=+25^\circ\text{C}$	P_{dc}	6.16	kW	$T_j=+25^\circ\text{C}$	EER_d	5.80	-
$T_j=+20^\circ\text{C}$	P_{dc}	2.63	kW	$T_j=+20^\circ\text{C}$	EER_d	6.74	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.020	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.020	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	4060	m^3/h
Sound power level, indoors / outdoors	L_{WA}	44/65	dB				
Emissions of nitrogen oxides (if applicable)	NO_x (**)	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m^3/h
GWP of the refrigerant	-	675	kg CO_2 eq (100years)				
Standard rating conditions used	Low temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Information requirements for comfort chillers

Model(s):				Outdoor unit: AW-YHPSA14-H93 Indoor unit: AW-WHPSA1216-N93			
Outdoor side heat exchanger of chiller:				Air to water			
Indoor side heat exchanger chiller:				Water			
Type:				Compressor driven vapour compression			
Driver of compressor:				Electric motor			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	13.3	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	270.9	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^\circ\text{C}$	P_{dc}	13.30	kW	$T_j=+35^\circ\text{C}$	EER _d	3.47	-
$T_j=+30^\circ\text{C}$	P_{dc}	10.20	kW	$T_j=+30^\circ\text{C}$	EER _d	5.26	-
$T_j=+25^\circ\text{C}$	P_{dc}	6.57	kW	$T_j=+25^\circ\text{C}$	EER _d	8.45	-
$T_j=+20^\circ\text{C}$	P_{dc}	3.33	kW	$T_j=+20^\circ\text{C}$	EER _d	10.07	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.020	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.020	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	4060	m ³ /h
Sound power level, indoors / outdoors	LWA	44/64	dB				
Emissions of nitrogen oxides (if applicable)	NO _x (**)	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m ³ /h
GWP of the refrigerant	-	675	kg CO ₂ eq (100years)				
Standard rating conditions used	Medium temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Information requirements for comfort chillers

Model(s):	Outdoor unit: AW-YHPSA16-H93 Indoor unit: AW-WHPSA1216-N93						
Outdoor side heat exchanger of chiller:	Air to water						
Indoor side heat exchanger chiller:	Water						
Type:	Compressor driven vapour compression						
Driver of compressor:	Electric motor						
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	14.3	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	183.6	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^\circ\text{C}$	P_{dc}	14.31	kW	$T_j=+35^\circ\text{C}$	EER_d	2.47	-
$T_j=+30^\circ\text{C}$	P_{dc}	10.68	kW	$T_j=+30^\circ\text{C}$	EER_d	3.63	-
$T_j=+25^\circ\text{C}$	P_{dc}	6.76	kW	$T_j=+25^\circ\text{C}$	EER_d	5.27	-
$T_j=+20^\circ\text{C}$	P_{dc}	3.41	kW	$T_j=+20^\circ\text{C}$	EER_d	7.29	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.020	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.020	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	4650	m^3/h
Sound power level, indoors / outdoors	L_{WA}	44/68	dB				
Emissions of nitrogen oxides (if applicable)	$NO_x(**)$	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m^3/h
GWP of the refrigerant	-	2088	kg CO_2 eq (100years)				
Standard rating conditions used	Low temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							

Information requirements for comfort chillers

Model(s):				Outdoor unit: AW-YHPSA16-H93 Indoor unit: AW-WHPSA1216-N93			
Outdoor side heat exchanger of chiller:				Air to water			
Indoor side heat exchanger chiller:				Water			
Type:				Compressor driven vapour compression			
Driver of compressor:				Electric motor			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	15.4	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	265.3	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio for part load at given outdoor temperature T_j			
$T_j=+35^\circ\text{C}$	P_{dc}	15.40	kW	$T_j=+35^\circ\text{C}$	EER _d	3.50	-
$T_j=+30^\circ\text{C}$	P_{dc}	11.42	kW	$T_j=+30^\circ\text{C}$	EER _d	5.14	-
$T_j=+25^\circ\text{C}$	P_{dc}	7.27	kW	$T_j=+25^\circ\text{C}$	EER _d	7.83	-
$T_j=+20^\circ\text{C}$	P_{dc}	3.40	kW	$T_j=+20^\circ\text{C}$	EER _d	10.35	-
Degradation co-efficient for chillers (*)	C_{dc}	0.9	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	0.020	kW	Crankcase heater mode	P_{CK}	0.000	kW
Thermosat-off mode	P_{TO}	0.010	kW	Standby mode	P_{SB}	0.020	kW
Other items							
Capacity control	variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	4650	m ³ /h
Sound power level, indoors / outdoors	L_{WA}	44/67	dB				
Emissions of nitrogen oxides (if applicable)	$NO_x(**)$	-	mg/kWh input GCV	For water / brine-to-water chillers: Rated brine or water flow rate, outdoor side heat exchanger	-	-	m ³ /h
GWP of the refrigerant	-	675	kg CO ₂ eq (100years)				
Standard rating conditions used	Medium temperature application						
Contact details	AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France						
(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0,9. (**) From 26 September 2018.							


Condition(°C)	outdoor unit	indoor unit	Capacity (kW)	Power input (kW)	EER/COP (/)
Ambient Temperature: 35/24 Water temperature: 12/7	AW-YHPSA04-H91	AW-WHPSA0406-N91	4.70	1.36	3.45
	AW-YHPSA06-H91	AW-WHPSA0406-N91	7.00	2.33	3.00
	AW-YHPSA08-H91	AW-WHPSA0810-N91	7.40	2.19	3.38
	AW-YHPSA10-H91	AW-WHPSA0810-N91	8.20	2.48	3.30
	AW-YHPSA12-H91	AW-WHPSA1216-N91	11.60	4.22	2.75
	AW-YHPSA14-H91	AW-WHPSA1216-N91	12.70	4.98	2.55
	AW-YHPSA16-H91	AW-WHPSA1216-N91	14.00	5.71	2.45
	AW-YHPSA12-H93	AW-WHPSA1216-N93	11.60	4.22	2.75
	AW-YHPSA14-H93	AW-WHPSA1216-N93	12.70	4.98	2.55
	AW-YHPSA16-H93	AW-WHPSA1216-N93	14.00	5.71	2.45
Ambient Temperature: 35/24 Water temperature: 23/18	AW-YHPSA04-H91	AW-WHPSA0406-N91	4.50	0.81	5.55
	AW-YHPSA06-H91	AW-WHPSA0406-N91	6.55	1.34	4.90
	AW-YHPSA08-H91	AW-WHPSA0810-N91	8.40	1.66	5.05
	AW-YHPSA10-H91	AW-WHPSA0810-N91	10.00	2.08	4.80
	AW-YHPSA12-H91	AW-WHPSA1216-N91	12.00	3.00	4.00
	AW-YHPSA14-H91	AW-WHPSA1216-N91	13.50	3.75	3.60
	AW-YHPSA16-H91	AW-WHPSA1216-N91	14.90	4.38	3.40
	AW-YHPSA12-H93	AW-WHPSA1216-N93	12.00	3.00	4.00
	AW-YHPSA14-H93	AW-WHPSA1216-N93	13.50	3.75	3.60
	AW-YHPSA16-H93	AW-WHPSA1216-N93	14.90	4.38	3.40
Ambient Temperature: 7/6 Water temperature: 30/35	AW-YHPSA04-H91	AW-WHPSA0406-N91	4.25	0.82	5.20
	AW-YHPSA06-H91	AW-WHPSA0406-N91	6.20	1.24	5.00
	AW-YHPSA08-H91	AW-WHPSA0810-N91	8.30	1.60	5.20
	AW-YHPSA10-H91	AW-WHPSA0810-N91	10.00	2.00	5.00
	AW-YHPSA12-H91	AW-WHPSA1216-N91	12.10	2.44	4.95
	AW-YHPSA14-H91	AW-WHPSA1216-N91	14.50	3.09	4.70
	AW-YHPSA16-H91	AW-WHPSA1216-N91	16.00	3.56	4.50
	AW-YHPSA12-H93	AW-WHPSA1216-N93	12.10	2.44	4.95
	AW-YHPSA14-H93	AW-WHPSA1216-N93	14.50	3.09	4.70
	AW-YHPSA16-H93	AW-WHPSA1216-N93	16.00	3.56	4.50
Ambient Temperature: 2/1 Water temperature: 30/35	AW-YHPSA04-H91	AW-WHPSA0406-N91	4.45	1.10	4.05
	AW-YHPSA06-H91	AW-WHPSA0406-N91	5.50	1.39	3.95
	AW-YHPSA08-H91	AW-WHPSA0810-N91	7.10	1.73	4.10
	AW-YHPSA10-H91	AW-WHPSA0810-N91	8.20	2.02	4.05
	AW-YHPSA12-H91	AW-WHPSA1216-N91	9.30	2.35	3.95
	AW-YHPSA14-H91	AW-WHPSA1216-N91	11.40	3.12	3.65
	AW-YHPSA16-H91	AW-WHPSA1216-N91	13.00	3.71	3.50
	AW-YHPSA12-H93	AW-WHPSA1216-N93	9.30	2.35	3.95
	AW-YHPSA14-H93	AW-WHPSA1216-N93	11.40	3.12	3.65
	AW-YHPSA16-H93	AW-WHPSA1216-N93	13.00	3.71	3.50

Condition(°C)	outdoor unit	indoor unit	Capacity (kW)	Power input (kW)	EER/COP (/)
Ambient Temperature: -7/-8 Water temperature: 30/35	AW-YHPSA04-H91	AW-WHPSA0406-N91	4.80	1.52	3.15
	AW-YHPSA06-H91	AW-WHPSA0406-N91	6.10	2.00	3.05
	AW-YHPSA08-H91	AW-WHPSA0810-N91	7.10	2.18	3.25
	AW-YHPSA10-H91	AW-WHPSA0810-N91	8.25	2.62	3.15
	AW-YHPSA12-H91	AW-WHPSA1216-N91	10.00	3.33	3.00
	AW-YHPSA14-H91	AW-WHPSA1216-N91	12.00	4.29	2.80
	AW-YHPSA16-H91	AW-WHPSA1216-N91	13.30	4.93	2.70
	AW-YHPSA12-H93	AW-WHPSA1216-N93	10.00	3.33	3.00
	AW-YHPSA14-H93	AW-WHPSA1216-N93	12.00	4.29	2.80
	AW-YHPSA16-H93	AW-WHPSA1216-N93	13.30	4.93	2.70
Ambient Temperature: 7/6 Water temperature: 40/45	AW-YHPSA04-H91	AW-WHPSA0406-N91	4.35	1.14	3.80
	AW-YHPSA06-H91	AW-WHPSA0406-N91	6.35	1.69	3.75
	AW-YHPSA08-H91	AW-WHPSA0810-N91	8.20	2.08	3.95
	AW-YHPSA10-H91	AW-WHPSA0810-N91	10.00	2.63	3.80
	AW-YHPSA12-H91	AW-WHPSA1216-N91	12.30	3.24	3.80
	AW-YHPSA14-H91	AW-WHPSA1216-N91	14.20	3.89	3.65
	AW-YHPSA16-H91	AW-WHPSA1216-N91	16.00	4.44	3.60
	AW-YHPSA12-H93	AW-WHPSA1216-N93	12.30	3.24	3.80
	AW-YHPSA14-H93	AW-WHPSA1216-N93	14.20	3.89	3.65
	AW-YHPSA16-H93	AW-WHPSA1216-N93	16.00	4.44	3.60
Ambient Temperature: 2/1 Water temperature: 40/45	AW-YHPSA04-H91	AW-WHPSA0406-N91	5.10	1.70	3.00
	AW-YHPSA06-H91	AW-WHPSA0406-N91	5.80	1.93	3.00
	AW-YHPSA08-H91	AW-WHPSA0810-N91	7.40	2.28	3.25
	AW-YHPSA10-H91	AW-WHPSA0810-N91	7.85	2.45	3.20
	AW-YHPSA12-H91	AW-WHPSA1216-N91	10.70	3.57	3.00
	AW-YHPSA14-H91	AW-WHPSA1216-N91	11.70	4.09	2.86
	AW-YHPSA16-H91	AW-WHPSA1216-N91	12.80	4.49	2.85
	AW-YHPSA12-H93	AW-WHPSA1216-N93	10.70	3.57	3.00
	AW-YHPSA14-H93	AW-WHPSA1216-N93	11.70	4.09	2.86
	AW-YHPSA16-H93	AW-WHPSA1216-N93	12.80	4.49	2.85
Ambient Temperature: -7/-8 Water temperature: 40/45	AW-YHPSA04-H91	AW-WHPSA0406-N91	4.30	1.83	2.35
	AW-YHPSA06-H91	AW-WHPSA0406-N91	5.40	2.25	2.40
	AW-YHPSA08-H91	AW-WHPSA0810-N91	6.60	2.59	2.55
	AW-YHPSA10-H91	AW-WHPSA0810-N91	7.35	2.88	2.55
	AW-YHPSA12-H91	AW-WHPSA1216-N91	10.20	4.25	2.40
	AW-YHPSA14-H91	AW-WHPSA1216-N91	11.80	5.02	2.35
	AW-YHPSA16-H91	AW-WHPSA1216-N91	12.90	5.78	2.23
	AW-YHPSA12-H93	AW-WHPSA1216-N93	10.20	4.25	2.40
	AW-YHPSA14-H93	AW-WHPSA1216-N93	11.80	5.02	2.35
	AW-YHPSA16-H93	AW-WHPSA1216-N93	12.90	5.78	2.23

Condition(°C)	outdoor unit	indoor unit	Capacity (kW)	Power input (kW)	EER/COP (/)
Ambient Temperature: 7/6 Water temperature: 47/55	AW-YHPSA04-H91	AW-WHPSA0406-N91	4.40	1.49	2.95
	AW-YHPSA06-H91	AW-WHPSA0406-N91	6.00	2.00	3.00
	AW-YHPSA08-H91	AW-WHPSA0810-N91	7.50	2.36	3.18
	AW-YHPSA10-H91	AW-WHPSA0810-N91	9.50	3.06	3.10
	AW-YHPSA12-H91	AW-WHPSA1216-N91	12.00	3.87	3.10
	AW-YHPSA14-H91	AW-WHPSA1216-N91	13.80	4.60	3.00
	AW-YHPSA16-H91	AW-WHPSA1216-N91	16.00	5.52	2.90
	AW-YHPSA12-H93	AW-WHPSA1216-N93	12.00	3.87	3.10
	AW-YHPSA14-H93	AW-WHPSA1216-N93	13.80	4.60	3.00
	AW-YHPSA16-H93	AW-WHPSA1216-N93	16.00	5.52	2.90
Ambient Temperature: 2/1 Water temperature: 47/55	AW-YHPSA04-H91	AW-WHPSA0406-N91	5.10	2.08	2.45
	AW-YHPSA06-H91	AW-WHPSA0406-N91	5.65	2.31	2.45
	AW-YHPSA08-H91	AW-WHPSA0810-N91	7.10	2.73	2.60
	AW-YHPSA10-H91	AW-WHPSA0810-N91	8.10	3.16	2.56
	AW-YHPSA12-H91	AW-WHPSA1216-N91	11.40	4.47	2.55
	AW-YHPSA14-H91	AW-WHPSA1216-N91	12.40	5.06	2.45
	AW-YHPSA16-H91	AW-WHPSA1216-N91	13.40	5.58	2.40
	AW-YHPSA12-H93	AW-WHPSA1216-N93	11.40	4.47	2.55
	AW-YHPSA14-H93	AW-WHPSA1216-N93	11.80	4.82	2.45
	AW-YHPSA16-H93	AW-WHPSA1216-N93	13.40	5.58	2.40
Ambient Temperature: -7/-8 Water temperature: 47/55	AW-YHPSA04-H91	AW-WHPSA0406-N91	4.00	2.05	1.95
	AW-YHPSA06-H91	AW-WHPSA0406-N91	5.15	2.58	2.00
	AW-YHPSA08-H91	AW-WHPSA0810-N91	6.15	3.00	2.05
	AW-YHPSA10-H91	AW-WHPSA0810-N91	6.85	3.43	2.00
	AW-YHPSA12-H91	AW-WHPSA1216-N91	10.00	4.88	2.05
	AW-YHPSA14-H91	AW-WHPSA1216-N91	11.00	5.37	2.05
	AW-YHPSA16-H91	AW-WHPSA1216-N91	12.50	6.19	2.02
	AW-YHPSA12-H93	AW-WHPSA1216-N93	10.00	4.88	2.05
	AW-YHPSA14-H93	AW-WHPSA1216-N93	11.00	5.37	2.05
	AW-YHPSA16-H93	AW-WHPSA1216-N93	12.50	6.19	2.02



TECHNICAL DATA MANUAL WELLEA SPLIT A R32

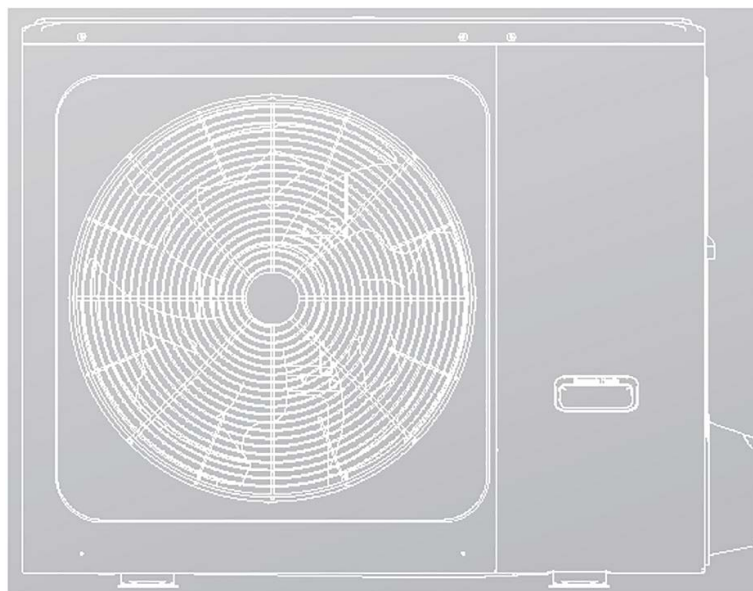

WARNING :

The design and specifications are subject to change without prior notice for product improvement. Consult with the sales agency or manufacturer for details.