

## CAD

# Cassette 950x1340 monosplit / DC Inverter



- Cassette line available in capacity of 14 kW.
- Cooling & heating operation mode.
- DC Inverter and sine wave compressor drive technology.



### PRODUCT ADVANTAGES


- > Operating in ambient temperature, up to -15°C in heating and -10°C in cooling.
- > Centralized controller up to 128 groups including weekly timer (optional).
- > Integrated water pump.



RCV01

## CAD

### Cassette 950x1340 monosplit / DC Inverter

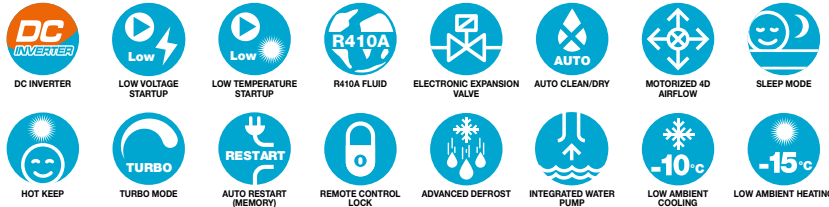

#### [ TECHNICAL DATA ]

Indoor unit		AWSI-CAD060-N11	
Outdoor unit		AWAU-YUDA060-H13	
<b>COOLING</b>			
Rated capacity	kW	<b>14.0 (4.0-15.5)</b>	
Rated power input	kW	4.36 (2.0-6.5)	
Operating limits	°C	-10°/46° Dry bulb	
<b>HEATING</b>			
Rated capacity	kW	<b>15.0 (4.0-17.5)</b>	
Rated power input	kW	4.4 (2.0-6.5)	
SCOP/Energy label		3.41/B	
Operating limits	°C	-15°/24° Dry bulb	
Capacity @ -10°C	kW	12.0	
Capacity @ -15°C	kW	11.0	
<b>INDOOR UNIT</b>			
Sound pressure level to 1 m (LS/MS/HS)	dB(A)	42/45/50	
Sound power level	dB(A)	63	
Airflow (LS/MS/HS)	m³/h	1500/1750/1980	
Dehumidification	l/h	5	
Outline dimensions (WxHxD)	mm	840x280x1230	
Package dimensions (WxHxD)	mm	920x370x1325	
Net weight/Gross weight	kg	46/53	
Part number		<b>7SP042219</b>	
<b>FRAME</b>			
Outline dimensions (WxHxD)	mm	950x80x1340	
Package dimensions (WxHxD)	mm	995x115x1400	
Net weight/Gross weight	kg	8.4/12	
Part number frame		<b>7ACVF0549</b>	
<b>OUTDOOR UNIT</b>			
Sound pressure level to 1 m	dB(A)	60	
Sound power level	dB(A)	73	
Airflow	m³/h	6500	
Compressor type		Rotary DC Inverter	
Outline dimensions (WxHxD)	mm	948x1250x340	
Package dimensions (WxHxD)	mm	1095x1400x410	
Net weight/Gross weight	kg	96/106	
Part number 3~400V - 50 Hz - N		<b>7SP062793</b>	
<b>POWER SUPPLY 3~400V - 50 HZ - N</b>			
Power supply side		Outdoor	
Power cable section	mm²	5x4.0	
Fuse rating am	A	20	
Electrical connections	mm²	4x1.5	
<b>PIPE LINE</b>			
Suction pipe diameter	inches	3/4"	
Liquid pipe diameter	inches	3/8"	
Max length	m	50	
Max height	m	30	