


CBF

Cassette monosplit 900x900 Fixed speed

- Cassette line available in capacities from 12.8 up to 14 kW.
- Cooling and heating operation mode.
- "I Feel" function with precise room temperature control.
- 360 degree flow with round corners.

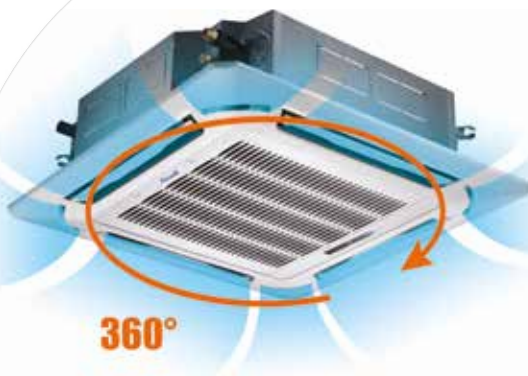

PRODUCT ADVANTAGES

- > Compact and slim design from 245 mm (model 48).
- > Integrated electronic control box.
- > Option for fresh air intake.



RC08B

CBF

Cassette monosplit 900x900 / Fixed speed



R410A FLUID



I FEEL



MULTIFLOW 360°



SLEEP MODE



HOT KEEP



DIGITAL DISPLAY



24 H



SELF DIAGNOSTIC



LOW BATTERY INDICATION



AUTO RESTART (MEMORY)



REMOTE CONTROL LOCK



INTEGRATED WATER PUMP



ALARM OUTPUT



UNIT ON INPUT



FRESH AIR



BMS COMPATIBLE



RCW8 (optional)



Central controller (optional)

[TECHNICAL DATA]

Indoor units		AWSI-CBF048-N11		AWSI-CBF060-N11			
Outdoor units 3~400V - 50 Hz - N		AWAU-YOF048-H13		AWAU-YOF060-H13			
COOLING							
Rated capacity		kW		12.8		14	
Rated power input		kW		4.77		5.57	
EER/Energy label				2.68/D		2.51/E	
Operating limits		°C		18°/43°		Dry bulb	
HEATING							
Rated capacity		kW		13.6		16	
Rated power input		kW		4.65		6.1	
COP/Energy label				2.92/D		2.62/E	
Operating limits		°C		-7°/24°		Dry bulb	
INDOOR UNIT							
Sound pressure level to 1 m (LS/MS/HS)		dB(A)		46/49/54		47/50/55	
Sound power level		dB(A)		64		65	
Airflow (LS/MS/HS)		m³/h		1400/1600/1900		1500/1700/2000	
Dehumidification		l/h		4.3		5.0	
Outline dimensions (WxHxD)		mm		840x245x840		840x287x840	
Package dimensions (WxHxD)		mm		900x265x900		900x292x900	
Net weight/Gross weight		kg		26.5/30.2		28.3/32.5	
Part number				7SP042233		7SP042238	
FRAME (INCLUDED IN THE INDOOR UNIT)							
Outline dimensions (WxHxD)		mm		950x55x950		950x55x950	
Package dimensions (WxHxD)		mm		1035x90x1035		1035x90x1035	
Net weight/Gross weight		kg		5/8		5/8	
Part number frame 950x950				7ACVF0564		7ACVF0564	
OUTDOOR UNIT							
Sound pressure level to 1 m		dB(A)		62		63	
Sound power level		dB(A)		72		73	
Airflow		m³/h		7200		7500	
Compressor type				Scroll		Scroll	
Outline dimensions (WxHxD)		mm		938x1369x392		938x1369x392	
Package dimensions (WxHxD)		mm		1095x1505x495		1095x1505x495	
Net weight/Gross weight		kg		110/124		111.1/125.4	
Part number 3~400V - 50 Hz - N				7SP062848		7SP062849	
POWER SUPPLY 3~400V - 50 HZ - N							
Power supply side				Indoor & Outdoor		Indoor & Outdoor	
Power cable section		mm²		3x1.0 + 5x2.5		3x1.0 + 5x2.5	
Fuse rating am		A		16 + 20		16 + 20	
Electrical connections		mm²		3x0.5		3x0.5	
PIPE LINE							
Suction pipe diameter		inches		3/4"		3/4"	
Liquid pipe diameter		inches		3/8"		3/8"	
Max length		m		50		50	
Max height		m		25		25	