

**PHOENIX RANGE  
PNX0 & FLO  
DC INVERTER**

**WALL MOUNTED  
HEAT PUMP**

6 Heat Pump models  
From 3,4 kW to 8,5 kW

INDOOR UNIT **PNX0 09-12 DCI**



**EXCEPTIONAL  
AIR QUALITY**

The Airwell ioniser produces 50,000 negative ions, as much as standing next to a waterfall!



**PRODUCT ADVANTAGES**

- Perfect comfort, unequalled unobtrusiveness, great accuracy in maintaining the desired temperature and controlling air quality.
- High glossy finish for the PNX0 DCI range.
- Aircare Bi-Polar Air Ionizer for PNX0 DCI range.
- Compatible with AIRCONET regulation.
- Optimal efficiency: Class A energy label (PNX0 09-12-18).
- Heating mode operation down to outdoor temperatures of -15° C.
- Optimal temperature regulation.
- Electronic regulation and programming.
- High efficiency filtration.
- Automatic treated air sweeping.
- LCD screen (except FLO 30 DCI).
- Fluid pre-charged at the factory for up to 20 m pipe lengths (depending on models).
- Supplied with RC7 remote control.
- Compatible with multi DCI outdoor units DUO, YAZ3&4 and CINCO.

\* Wall mounted RCW2 remote control for PNX0 DCI range (Optional)

**HIGH EFFICIENCY  
FILTRATION**

3 filtration levels to capture and neutralise dust, pollen, mites, tobacco odour...



Standard filter



Active charcoal filter



Electrostatic filter

INDOOR UNIT **PNX0 18-21-24 DCI**



OUTDOOR UNIT  
**GC 9-12-18 DCI**



**RC7**

**RCW2\***



INDOOR UNIT **FLO 30 DCI**



OUTDOOR UNIT  
**GC 21 DCI**



OUTDOOR UNIT  
**GC 24 DCI Z / GCD 030 DCI**






## PHOENIX PNX0 - FLO DCI

		PNX0 09 DCI	PNX0 12 DCI	PNX0 18 DCI	PNX0 21 DCI	PNX0 24 DCI	FLO 30 DCI
<b>Indoor Units</b>		<b>PNX0 09 DCI</b>	<b>PNX0 12 DCI</b>	<b>PNX0 18 DCI</b>	<b>PNX0 21 DCI</b>	<b>PNX0 24 DCI</b>	<b>FLO 30 DCI</b>
<b>Outdoor Units</b>		<b>GC 9 DCI</b>	<b>GC 12 DCI</b>	<b>AWAU-YBD018-H11</b>	<b>GC 21 DCI</b>	<b>GC 24 DCI Z</b>	<b>GCD 030 DCI</b>
<b>Cooling</b>	<b>Capacity</b>	<b>2,5 (1,4-3,6)</b>	<b>3,5 (1,4-4,3)</b>	<b>5 (1,5-8)</b>	<b>6 (1,5-6,7)</b>	<b>6,8 (1,5-7,5)</b>	<b>7,8 (1,5-8,8)</b>
	Power input	0,59	0,99	1,42	1,99	2,25	2,59
	EER/Energy Label	4,2 / A	3,5 / A	3,51 / A	3,0 / B	3,0 / B	3,01 / B
	Operating limits	-10°/ 46° Dry Bulb	-10°/ 46° Dry Bulb	-10°/ 46° Dry Bulb	-10°/ 46° Dry Bulb	-10°/ 46° Dry Bulb	-10°/ 46° Dry Bulb
<b>Heating</b>	<b>Capacity</b>	<b>3,4 (1,5-5)</b>	<b>4,3 (1,5-5,8)</b>	<b>5,6 (1,5-6,6)</b>	<b>6,5 (1,8-7,9)</b>	<b>7,05 (1,5-8,8)</b>	<b>8,5 (1,5-9,5)</b>
	Capacity at -15°C	2,0	2,6	2,3	-	-	-
	Power input	0,81	1,12	1,66	1,9	2,18	2,65
	COP/Energy Label	4,2 / A	3,8 / A	3,71 / A	3,4 / B	3,2 / C	3,2 / C
<b>Indoor unit</b>	Operating limits	-15°/ 24° Dry Bulb	-15°/ 24° Dry Bulb	-15°/ 24° Dry Bulb	-15°/ 24° Dry Bulb	-15°/ 24° Dry Bulb	-15°/ 24° Dry Bulb
	Sound pressure level 1 mt <sup>1</sup>	26/39	26/40	34/39/43	34/40/45	34/41/47	44/48/51
	Sound power level <sup>1</sup>	39/51	39/52	47/51/57	48/53/58	47/54/61	57/61/66
	Airflow <sup>1</sup>	330/430/530	350/450/550	550/700/850	620/760/900	670/800/960	900/1050/1250
	Dehumidification	1	1,5	2	2	2,5	3
	Dimensions (WxDxH)	810x210x285	810x210x285	1060x210x295	1060x210x295	1060x210x295	1200x236x340
	Weight	11,5	11,5	15	15	15	18,5
	<b>Part number</b>	<b>7SP022798</b>	<b>7SP022799</b>	<b>7SP061738</b>	<b>7SP022801</b>	<b>7SP022802</b>	<b>7SP022333</b>
	<b>Price</b>	€					
	<b>Outdoor unit</b>	Sound pressure level 1 mt	51	52	53	55	56
Sound power level		61	62	64	65	70	69
Airflow		1780	1780	2160	2860	3600	3600
Compressor type		Rotary DCI	Rotary DCI	Scroll DCI	Scroll DCI	Twin Rotary DCI	Twin Rotary DCI
<b>Power supply 1-230V - 50 Hz</b>	Dimensions (WxDxH)	795x290x610	795x290x610	795x290x610	846x302x690	950x412x835	950x412x835
	Weight	38	38,5	39	46	64,5	66
	<b>Part number</b>	<b>7SP061420</b>	<b>7SP061421</b>	<b>7SP061422</b>	<b>7SP061614</b>	<b>7SP061677</b>	<b>7SP061735</b>
<b>Price</b>	€						
<b>Full set price</b>	€						
<b>Power supply 1-230V - 50Hz</b>	Power supply side	Indoor	Indoor	Indoor	Indoor	Outdoor	Outdoor
	Power cable section	3x1,5	3x1,5	3x2,5	3x2,5	3x2,5	3x2,5
	Fuse rating	A	16	20	20	20	20
	Electrical connections	4x1,5	4x1,5	4x2,5	4x2,5	4x2,5	4x2,5
<b>Pipe line</b>	Suction pipe diameter	3/8"	3/8"	1/2"	1/2"	5/8"	5/8"
	Liquid pipe diameter	1/4"	1/4"	1/4"	1/4"	3/8"	3/8"
	Max lenght	20	20	30	30	30	30
	Max height	10	10	10	10	15	15

<sup>1</sup>Data are relative to Low speed, Medium speed and High speed

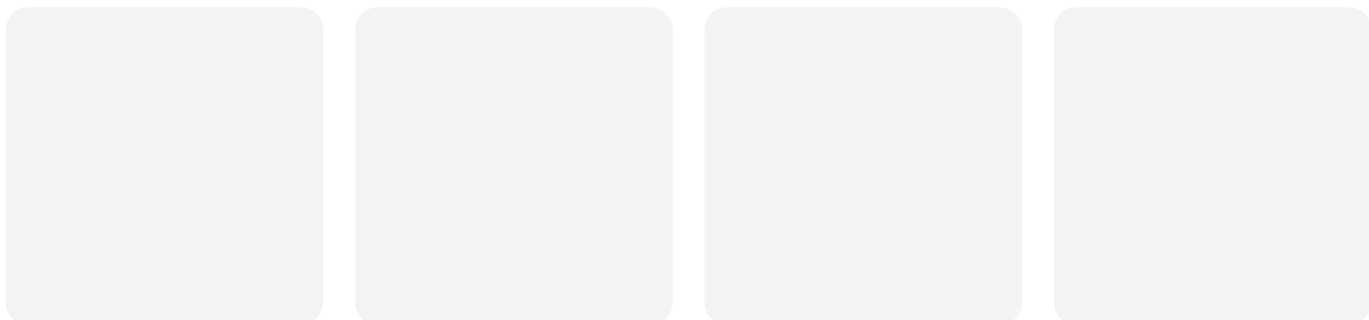

<b>Accessories</b>		PNX0 09 DCI	PNX0 12 DCI	PNX0 18 DCI	PNX0 21 DCI	PNX0 24 DCI	FLO 30 DCI
Mounting bracket	7ACTL0016	€			-	-	n.a.
	7ACTL0018	€	-	-	-	-	n.a.
Remote control RCW2	7ACTL1212	€					-