


**WDI  
DC INVERTER**

**WALL MOUNTED  
HEAT PUMP**

4 Heat Pump models  
From 2,5 kW to 5,3 kW

INDOOR UNIT **WDI 7-9-12-18**

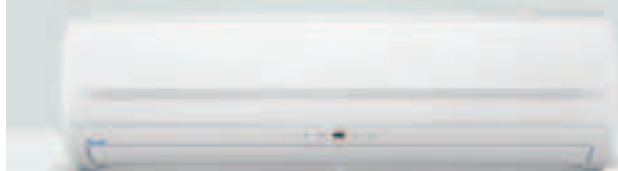

**PRODUCT ADVANTAGES**

- Flexibility and comfort of use.
- Extended operating range.
- Optimal efficiency: Class A energy label (depending on models).
- Reduced noise levels.
- High efficiency filtration.
- Electronic regulation and programming.
- Automatic treated air sweeping.
- R410A "green" fluid.
- Optimal temperature regulation.
- Heating mode operation down to outdoor temperatures of -15° C.
- Supplied with RC7 remote control.

OUTDOOR UNIT  
**GC 7-9-12 DCI**



OUTDOOR UNIT  
**GC 18 DCI**



**RC7**






## WDI

		WDI 7	WDI 9	WDI 12	WDI 18
		ST WDI 7	ST WDI 9	ST WDI 12	ST WDI 18
		GC 7 DCI	GC 9 DCI	GC 12 DCI	GC 18 DCI
<b>Cooling</b>	<b>Capacity</b>	<b>2,2 (1,3-2,6)</b>	<b>2,5 (1,3-3)</b>	<b>3,5 (1,3-4,1)</b>	<b>5,0 (1,4-5,5)</b>
	Input power	0,66	0,75	1,03	1,56
	EER/Energy Label	3,33 / A	3,33 / A	3,39 / A	3,20 / B
	Operating limits	10°/ 46° Dry Bulb	10°/ 46° Dry Bulb	10°/ 46° Dry Bulb	10°/ 46° Dry Bulb
<b>Heating</b>	<b>Capacity</b>	<b>2,5 (1,3-3,1)</b>	<b>2,8 (1,4-3,5)</b>	<b>3,6 (1,6-4,1)</b>	<b>5,3 (1,6-5,9)</b>
	Input power	0,73	0,82	1,05	1,55
	COP/Energy Label	3,42 / B	3,41 / B	3,42 / B	3,41 / B
	Operating limits	-15°/ 24° Dry Bulb	-15°/ 24° Dry Bulb	-15°/ 24° Dry Bulb	-15°/ 24° Dry Bulb
<b>Indoor unit</b>	Sound pressure level 1 mt <sup>1</sup>	30/33/36	32/35/39	29/33/39	34/41/44
	Sound power level <sup>1</sup>	49/46/43	42/48/52	42/46/52	47/54/56
	Airflow <sup>1</sup>	300/350/400	270/350/420	350/450/550	480/620/720
	Dehumidification	1	1	1,5	2
	Dimensions (WxDxH)	680x185x250	680x185x250	840x185x250	900x205x295
	Weight	7	7	8	11
	<b>Part number</b>	<b>7SP022309</b>	<b>7SP022310</b>	<b>7SP022311</b>	<b>7SP022312</b>
	<b>Price</b>	€			
<b>Outdoor unit</b>	Sound pressure level 1 mt	54	54	55	53
	Sound power level	64	64	65	63
	Airflow	1400	1390	1390	2160
	Compressor type	Rotary DC Inverter	Rotary DC Inverter	Rotary DC Inverter	Scroll DC Inverter
	Dimensions (WxDxH)	760x245x545	760x245x545	760x245x545	795x290x610
	Weight	35	36	37	38
<b>Power supply 1-230V - 50 Hz</b>	<b>Part number</b>	<b>7SP061617</b>	<b>7SP061618</b>	<b>7SP061619</b>	<b>7SP061620</b>
	<b>Price</b>	€			
	<b>Full set price</b>	€			
<b>Power supply 1-230V - 50Hz</b>	Power supply side	Indoor	Indoor	Indoor	Indoor
	Power cable section	3x1,5	3x1,5	3x1,5	3x1,5
	Fuse rating am	12	12	16	20
	Electrical connections	4x1,5	4x1,5	4x1,5	5x1,5
<b>Pipe line</b>	Suction pipe diameter	3/8"	3/8"	3/8"	1/2"
	Liquid pipe diameter	1/4"	1/4"	1/4"	1/4"
	Max lenght	15	15	15	15
	Max height	10	10	10	10

<sup>1</sup>Data are relative to Low speed, Medium speed and High speed

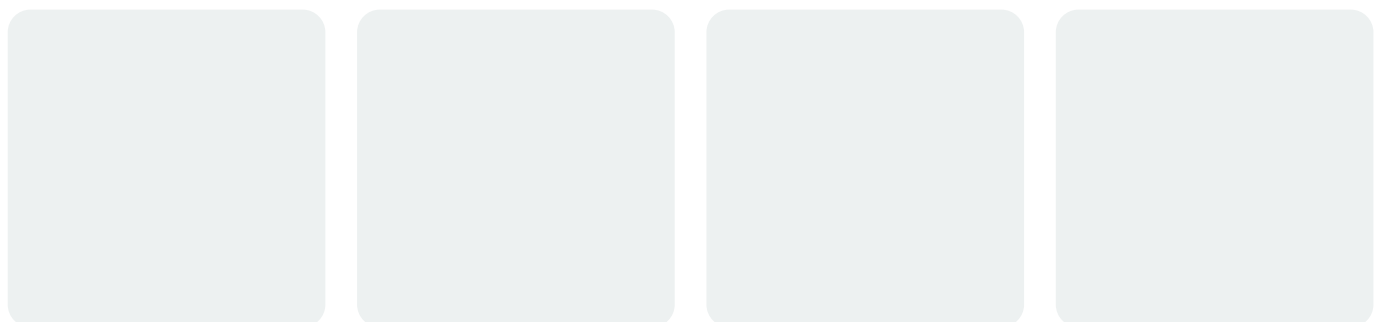

Accessories	WDI 7	WDI 9	WDI 12	WDI 18
Mounting bracket	7ACTL0016 €	n.a.		-
	7ACTL0018 €	-	-	-