

**LOUISIANA RANGE**

**XLF  
DC INVERTER**

**LOW/HIGH  
WALL MOUNTED**

2 Heat Pump models  
From 2,5 kW to 3,5 kW

INDOOR UNIT **XLF 9-12 DCI**



**BLOWN AIR  
IN 4 DIRECTIONS**

Treated air is distributed in four directions. The user can direct the treated air to optimise comfort levels, depending on the chosen operating mode:

**Cooling mode:** air blown upwards falls back down evenly to cool the room.


**Heating mode:** air blown towards the floor rises progressively to spread more effectively throughout the room.

**Side blowing:** ensures uniform air distribution throughout the room without creating the feeling of draughts.

**PRODUCT ADVANTAGES**

- Low or high wall mounted installation.
- Hi wall installation or floor installation (once bottom port is closed).
- Innovative, modern and ultra-compact design (depth 160mm).
- Multi flow with air distribution to 4 sides and option to adjust to 3 sides (with special kit).
- Optimized air flow.
- Comfortable air distribution.
- Class A energy label.
- High performance filtration.
- Aircare bi-polar ionizer as standard
- Easy for installation and disassembly air filter
- Ultra-quiet operation.
- Compatible with Multisplits DCI DUO/YAZ3&4/CINCO.
- Electronic regulation and programming.
- Supplied with RC7 remote control.

\* Wall mounted RCW2 remote control (Optional)



OUTDOOR UNIT  
**GC 9-12 DCI**



**RC7**

**RCW2\***






## LOUISIANA XLF DCI

		XLF 9 DCI	XLF 12 DCI
	<b>Indoor Units</b>	<b>XLF 9 DCI</b>	<b>XLF 12 DCI</b>
	<b>Outdoor Units</b>	<b>GC 9 DCI</b>	<b>GC 12 DCI</b>
<b>Cooling</b>	<b>Capacity</b>	<b>2,5</b>	<b>3,5</b>
	Power input	0,65	1,09
	EER/Energy Label	3,8 / A	3,2 / A
	Operating limits	-10°/ 46° Dry Bulb	-10°/ 46° Dry Bulb
<b>Heating</b>	<b>Capacity</b>	<b>2,5</b>	<b>3,5</b>
	Power input	0,62	0,97
	COP/Energy Label	4,0 / A	3,61 / A
	Operating limits	-15°/ 24° Dry Bulb	-15°/ 24° Dry Bulb
<b>Indoor unit</b>	Sound pressure level 1 mt <sup>1</sup>	34/36/38	34/37/39
	Sound power level	55	56
	Airflow <sup>1</sup>	330/370/390	310/370/400
	Dehumidification	1,6	1
	Dimensions (WxDxH)	570x160x570	570x160x570
	Weight	13,5	14
	<b>Part number</b>	<b>7SP022755</b>	<b>7SP022756</b>
<b>Outdoor unit</b>	<b>Price</b>	<b>€</b>	<b>€</b>
	Sound pressure level 1 mt	52	52
	Sound power level	61	62
	Airflow	1780	1780
	Compressor type	Rotary	Rotary
	Dimensions (WxDxH)	795x290x610	795x290x610
	Weight	38	38
<b>Power supply 1-230V-50Hz</b>	<b>Part number</b>	<b>7SP061420</b>	<b>7SP061421</b>
	<b>Price</b>	<b>€</b>	<b>€</b>
	<b>Full set price</b>	<b>€</b>	<b>€</b>
<b>Power supply 1-230V-50Hz</b>	Power supply side	Indoor	Indoor
	Power cable section	3x1	3x1,5
	Fuse rating	16	16
	Electrical connections	5x1	5x1,5
<b>Pipe line</b>	Suction pipe diameter	3/8"	3/8"
	Liquid pipe diameter	1/4"	1/4"
	Max lenght	20	20
	Max height	10	10

<sup>1</sup>Data are relative to Low speed, Medium speed and High speed

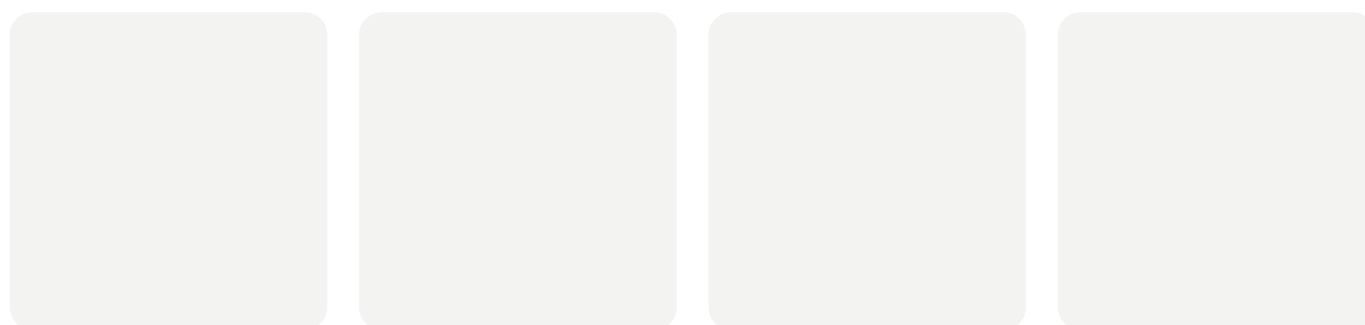

Accessories	XLF 9 DCI	XLF 12 DCI
Outdoor wall mounting bracket 7ACTL0016	€	
Bracket for corner installation TBC	€	
Remote control RCW2 7ACE1212	€	