

LOUISIANA RANGE

**XLF
DC INVERTER**

**LOW/HIGH
WALL MOUNTED**

2 Heat Pump models
From 2,5 kW to 3,5 kW

INDOOR UNIT **XLF 9-12 DCI**



**BLOWN AIR
IN 4 DIRECTIONS**

Treated air is distributed in four directions. The user can direct the treated air to optimise comfort levels, depending on the chosen operating mode:

Cooling mode: air blown upwards falls back down evenly to cool the room.

Heating mode: air blown towards the floor rises progressively to spread more effectively throughout the room.

Side blowing: ensures uniform air distribution throughout the room without creating the feeling of draughts.

PRODUCT ADVANTAGES

- Low or high wall mounted installation.
- Hi wall installation or floor installation (once bottom port is closed).
- Innovative, modern and ultra-compact design (depth 160mm).
- Multi flow with air distribution to 4 sides and option to adjust to 3 sides (with special kit).
- Optimized air flow.
- Comfortable air distribution.
- Class A energy label.
- High performance filtration.
- Aircare bi-polar ionizer as standard (available from Feb. 2009)
- Easy for installation and disassembly air filter
- Ultra-quiet operation.
- Compatible with Multisplits DCI DUO/TRIO/QUATTRO.
- Electronic regulation and programming.
- Supplied with RC4 remote control.

* Wall mounted RCW2 remote control (Optional)



OUTDOOR UNIT
GC 9-12 DCI



RC4

RCW2*






LOUISIANA XLF DCI

		XLF 9 DCI		XLF 12 DCI	
Indoor Units		XLF 9 DCI		XLF 12 DCI	
Outdoor Units		GC 9 DCI		GC 12 DCI	
Cooling	Capacity	kW	2,5	kW	3,5
	Power input	kW	0,65	kW	1,09
	EER/Energy Label		3,8 / A		3,2 / A
	Operating limits	°C	-10°/ 46° Dry Bulb		-10°/ 46° Dry Bulb
Heating	Capacity	kW	2,5	kW	3,5
	Power input	kW	0,62	kW	0,97
	COP/Energy Label		4,0 / A		3,61 / A
	Operating limits	°C	-15°/ 24° Dry Bulb		-15°/ 24° Dry Bulb
Indoor unit	Sound pressure level 1 mt ¹	dB(A)	34/36/38		34/37/39
	Sound power level	dB(A)	55		56
	Airflow ¹	m³/h	330/370/390		310/370/400
	Dehumidification	l/h	1,6		1
	Dimensions (WxDxH)	mm	570x160x570		570x160x570
	Weight	kg	13,5		14
	Part number		7SP022755		7SP022756
	Price	€			
Outdoor unit	Sound pressure level 1 mt	dB(A)	52		52
	Sound power level	dB(A)	61		62
	Airflow	m³/h	1780		1780
	Compressor type		Rotary		Rotary
	Dimensions (WxDxH)	mm	795x290x610		795x290x610
	Weight	kg	38		38
Power supply 1-230V-50Hz	Part number		7SP061420		7SP061421
	Price	€			
	Full set price	€			
Power supply 1-230V-50Hz	Power supply side		Indoor		Indoor
	Power cable section	mm²	3x1		3x1,5
	Fuse rating	A	16		16
	Electrical connections	mm²	5x1		5x1,5
Pipe line	Suction pipe diameter	inches	3/8"		3/8"
	Liquid pipe diameter	inches	1/4"		1/4"
	Max lenght	m	20		20
	Max height	m	10		10

¹Data are relative to Low speed, Medium speed and High speed

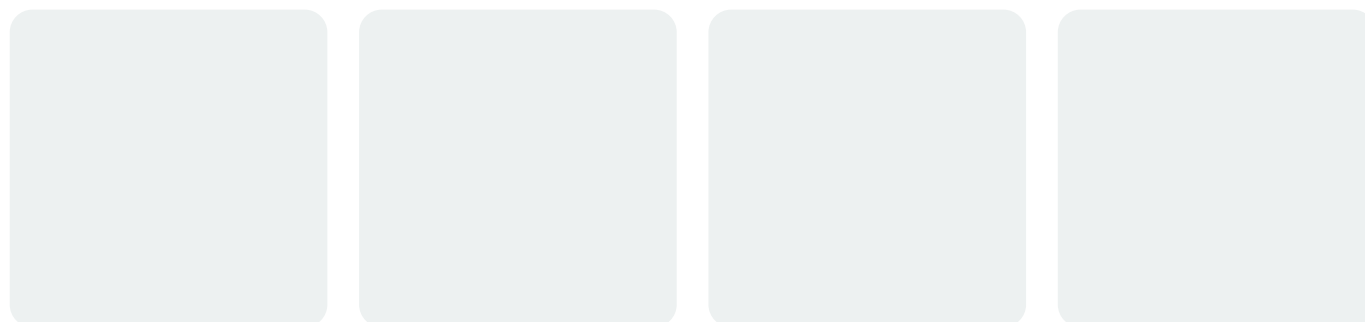

Accessories	XLF 9 DCI	XLF 12 DCI
Outdoor wall mounting bracket 7ACTL0016	€	
Bracket for corner installation TBC	€	
Remote control RCW2 7ACE1212	€	