

MYWELL RANGE

HFD
DC INVERTER

**WALL MOUNTED
HEAT PUMP**

4 Heat Pump models
From 2,2 kW to 5,3 kW

INDOOR UNIT **HFD 007-009**



PRODUCT ADVANTAGES

- Flexibility and comfort of use.
- Extended operating range.
- Optimal efficiency: Class A energy label for all models in cooling and heating mode.
- Reduced noise levels (51 dB(A) for model HFD 007).
- High efficiency filtration.
- Electronic regulation and programming.
- Self diagnostic LED lighting for ease of maintenance.
- Automatic treated air sweeping (motorised flaps).
- R410A "green" fluid.
- Optimal temperature regulation.
- Heating mode operation down to outdoor temperatures of -15° C.
- Supplied with RC7 remote control with LED display.
- Compatible with DUO, TRIO and DAKOTA DCI.

INDOOR UNIT **HFD 012-018**



OUTDOOR UNIT
GC 7 RC DCI / GCD 009-012



OUTDOOR UNIT
GC 18 RC WDI






MYWELL HFD

		HFD 007	HFD 009	HFD 012	HFD 018
Indoor Units		AWSI-HFD007-N11	AWSI-HFD009-N11	AWSI-HFD012-N11	AWSI-HFD018-N11
Outdoor Units		GC 7 RC DCI	AWAU-GCD009-H11	AWAU-GCD012-H11	AWAU-YBD018-H11
Cooling	Capacity	2,2 (0,9-2,6)	2,5 (0,8-3,0)	3,5 (0,9-4,0)	5,0 (1,4-5,5)
	Power input	0,66	0,78	1,09	1,51
	EER/Energy Label	3,33 / A	3,21 / A	3,21 / A	3,31 / A
	Operating limits	-10°/ 46° Dry Bulb	0°/ 46° Dry Bulb	0°/ 46° Dry Bulb	-10°/ 46° Dry Bulb
Heating	Capacity	2,2 (1,0-3,1)	2,5 (1,0-3,2)	3,5 (1,2-4,2)	5,1 (1,6-5,9)
	Power input	0,60	0,69	0,97	1,41
	COP/Energy Label	3,68 / A	3,61 / A	3,61 / A	3,61 / A
	Operating limits	-15°/ 24° Dry Bulb	-15°/ 24° Dry Bulb	-15°/ 24° Dry Bulb	-15°/ 24° Dry Bulb
Indoor unit	Sound pressure level 1 mt ¹	28/31/36	32/35/39	29/33/39	34/41/44
	Sound power level ²	51	54	56	56
	Airflow ³	97/97	117/117	153/153	200/200
	Dehumidification	0,9	1	1,5	2
	Dimensions (WxDxH)	680x185x250	680x185x250	840x185x250	900x205x295
	Weight	7	7	8	11
	Part number	7SP022794	7SP022795	7SP022796	7SP022797
Price	€				
Outdoor unit	Sound pressure level 1 mt	53	55	56	53
	Sound power level	64	65	66	63
	Airflow	1390	1390	1460	1460
	Compressor type	Rotary DC Inverter	Rotary DC Inverter	Rotary DC Inverter	Scroll
	Dimensions (WxDxH)	760x245x545	760x245x545	760x245x545	795x610x290
	Weight	35	31	32	38
Power supply 1-230V - 50 Hz	Part number	7SP061617	7SP0616736	7SP061737	7SP061738
	Price	€			
	Full set price	€			
Power supply 1-230V - 50Hz	Power supply side	Indoor	Indoor	Indoor	Indoor
	Power cable section	3x1,0	3x1,0	3x1,5	3x1,5
	Fuse rating	10	10	16	16
	Electrical connections	4x1,0	4x1,0	4x1,5	5x1,5
Pipe line	Suction pipe diameter	3/8"	3/8"	3/8"	1/2"
	Liquid pipe diameter	1/4"	1/4"	1/4"	1/4"
	Max lenght	15	15	15	15
	Max height	10	10	10	10

¹Data are relative to Low speed, Medium speed and High speed
²Data are relative to High speed
³Cooling/Heat Pump

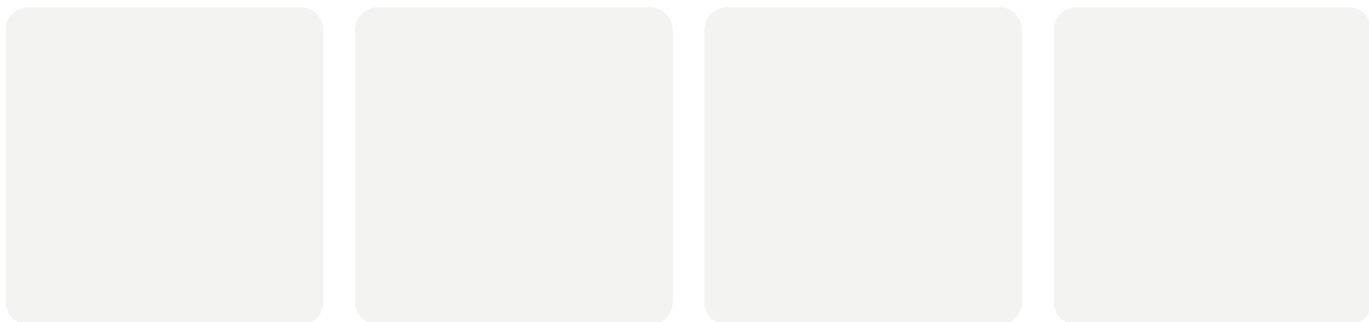

Accessories	HFD 007	HFD 009	HFD 012	HFD 018
Mounting bracket	7ACTL0016	€		