

PRIME

WALL MOUNTED RANGE

*Airwell*



# Airwell



OUTDOOR UNIT  
GC 7-9-12 / RC



OUTDOOR UNIT  
GC 18 / RC



RC4



#### REMOTE CONTROL - RC4

Small-size and with excellent ergonomic properties, the Airwell infrared remote control is very user friendly and has a high degree of precision to control temperature. It can be used to program advanced multiple functions such as choosing between ventilation speeds, night-time slow running, dehumidification, energy saving, "I feel" function and many others.

# PRIME

WALL MOUNTED RANGE

## WALL MOUNTED:

Thanks to the clean, essential, and yet highly refined lines, the PRIME wall mounted range blends well into the surrounding space. The innovative concept of the front panel has taken a major step forward with the incredibly versatile grilleless flat design. The style details and subdued elegance of the design combined with optimised comfort and simplified installation make an exceptional choice for those wanting a neat unit combined with pleasing features. This wall mounted range is particularly suited for residential heating and air conditioning needs.

This range is available in:

- 4 Cooling models from 2,17 kW to 5,50 kW
- 4 Heat Pump models from 2,21 kW to 5,70 kW

## PRODUCT BENEFITS AND FEATURES:

- New design with flat panel.
- Elegant with subtle design.
- Compact and lightweight for easy installation and maintenance.
- Low noise level in both indoors and outdoors.
- 2 fan speeds plus automatic speed.
- Automatic regulation.
- Automatic vertical treated air sweeping.
- Supplied with RC4 remote control.

## OUTDOOR UNIT



The rotary compressor driven outdoor unit provides optimum performance and noise levels. A "Bluefin" hydrophilic treatment promotes the flow of condensates, and offers corrosion protection to maintain performance levels and increasing the service life. On the other hand, the anticorrosion treatment with a high density powder paint coating ensures high resistance whatever the operating conditions.



### R-410A: AN ECO-FRIENDLY FLUID

The PRIME WALL MOUNTED range is available with the ecologically friendly fluid R410A. This provides high energy efficiency, while preserving the ozone layer, and is easily recyclable. Its high density and high energy efficiency make for high performance coefficients, thereby providing significant energy saving

# PRIME

## WALL MOUNTED RANGE


		<b>PRIME 7</b>	<b>PRIME 9</b>	<b>PRIME 12</b>	<b>PRIME 18</b>
	<b>Indoor Units</b>	<b>ST PRIME 7</b>	<b>ST PRIME 9</b>	<b>ST PRIME 12</b>	<b>ST PRIME 18</b>
	<b>Outdoor Units</b>	<b>GC 7</b>	<b>GC 9</b>	<b>GC 12</b>	<b>GC 18</b>
	<b>Outdoor Units</b>	<b>GC 7RC</b>	<b>GC 9RC</b>	<b>GC 12RC</b>	<b>GC 18RC</b>
<b>Cooling</b>	<b>Capacity</b>	<b>2,17</b>	<b>2,55</b>	<b>3,30</b>	<b>5,5</b>
	Power input	0,66	0,89	1,16	1,66
	EER/Energy Label	3,29 / A	2,84 / C	2,84 / C	3,31 / A
	Operating limits	10/46°C Dry Bulb	10/46°C Dry Bulb	10/46°C Dry Bulb	10/46°C Dry Bulb
<b>Heating</b>	<b>Capacity</b>	<b>2,21</b>	<b>2,65</b>	<b>3,40</b>	<b>5,70</b>
	Power input	0,63	0,82	1,05	1,67
	COP/Energy Label	3,51 / B	3,22 / C	3,22 / C	3,41 / B
	Operating limits	-9/24°C Dry Bulb	-9/24°C Dry Bulb	-9/24°C Dry Bulb	-9/24°C Dry Bulb
<b>Indoor unit</b>	Sound pressure level 1 mt <sup>1</sup>	32/37	35/41	34/41	37/43
	Sound power level <sup>1</sup>	44/50	49/53	49/55	50/55
	Airflow <sup>1</sup>	320/390	360/450	500/650	590/720
	Dehumidification	l/h 0,8	0,9	1,1	2,2
	Dimensions (WxDxH)	680x180x250	680x180x250	840x180x250	900x200x295
<b>Outdoor unit</b>	Weight	7	6	7	11
	Sound pressure level 1 mt	53	51	55	54
	Sound power level	62	62	64	65
	Airflow	1200	1200	1200	2160
	Compressor type	Rotary	Rotary	Rotary	Rotary
<b>Power supply 1-230V-50Hz</b>	Dimensions (WxDxH)	610x240x520	610x240x520	610x240x520	795x290x610
	Weight	27	24	30	43
	Power supply side	Indoor	Indoor	Indoor	Indoor
	Power cable section	3x1	3x1	3x1	3x1,5
	Fuse rating am	10	10	10	16
<b>Pipe line</b>	Electrical connections	4x1	4x1	4x1	3x1,5
	Electrical connections	5x1	5x1	5x1	5x1,5
	Suction pipe diameter	3/8"	3/8"	3/8"	1/2"
	Liquid pipe diameter	1/4"	1/4"	1/4"	1/4"
	Max lenght	15	15	15	15
	Max height	7	7	7	7

<sup>1</sup>Data are relative to Low speed and High speed

CMV PRIME 1 - A-1 MASTER - Specifications subject to change without notice. Pictures non contractual.

# Airwell

Your official dealer

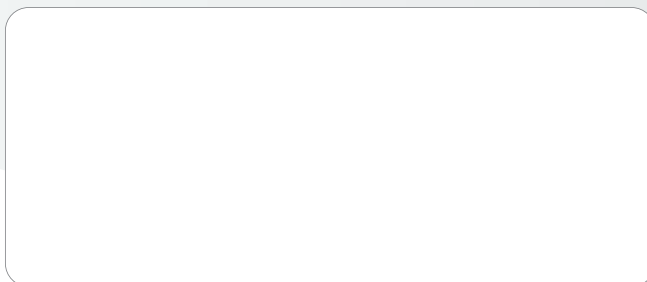

### Airwell Group

1, Bis Avenue du 8 mai 1945  
 Saint Quentin en Yvelines  
 78284 GUYANCOURT  
 France  
 Tel. +33 (0)1 39 44 78 00  
 Fax +33 (0)1 39 44 65 17

www.airwell.com  
 contact@airwell.com

