

# PRIME

WALL MOUNTED RANGE



# Airwell




# Airwell



OUTDOOR UNIT  
GC PRIME 7-9-12 / RC



OUTDOOR UNIT  
GC PRIME 18 / RC



RC4



#### REMOTE CONTROL PICTURE - RC4

Small-size and with excellent ergonomic properties, the Airwell infrared remote control is very user friendly and has a high degree of precision to control temperature. It can be used to program advanced multiple functions such as choosing between ventilation speeds, night-time slow running, dehumidification, energy saving, "I feel" function and many others.

# PRIME

## WALL MOUNTED RANGE





### WALL MOUNTED:



Thanks to the clean, essential, and yet highly refined lines, the PRIME wall mounted range blends well into the surrounding space. The innovative concept of the front panel has taken a major step forward with the incredibly versatile grilleless flat design. The style details and subdued elegance of the design combined with optimised comfort and simplified installation make an exceptional choice for those wanting a neat unit combined with pleasing features. This wall mounted range is particularly suited for residential heating and air conditioning needs.

This range is available in:

-  4 Cooling models from 2,12 kW to 5,1 kW
-  4 Heat Pump models from 2,15 kW to 5,55 kW


### PRODUCT BENEFITS AND FEATURES:

- New design with flat panel.
- Elegant with subtle design.
- Compact and lightweight for easy installation and maintenance.
- Low noise level in both indoors and outdoors.
- 2 fan speeds plus automatic speed.
- Automatic regulation.
- Automatic vertical treated air sweeping.
- Supplied with RC4 remote control.

### OUTDOOR UNIT



The rotary compressor driven outdoor unit provides optimum performance and noise levels. A "Bluefin" hydrophilic treatment promotes the flow of condensates, and offers corrosion protection to maintain performance levels and increasing the service life. On the other hand, the anticorrosion treatment with a high density powder paint coating ensures high resistance whatever the operating conditions.



# PRIME




## WALL MOUNTED RANGE

		<b>PRIME 7</b>	<b>PRIME 9</b>	<b>PRIME 12</b>	<b>PRIME 18</b>
<b>Indoor Units</b>		<b>ST PRIME 7</b>	<b>ST PRIME 9</b>	<b>ST PRIME 12</b>	<b>ST PRIME 18</b>
<b>Outdoor Units</b>		<b>GC PRIME 7</b>	<b>GC PRIME 9</b>	<b>GC PRIME 12</b>	<b>GC PRIME 18</b>
<b>Outdoor Units</b>		<b>GC PRIME 7RC</b>	<b>GC PRIME 9RC</b>	<b>GC PRIME 12RC</b>	<b>GC PRIME 18RC</b>
<b>Cooling</b>	<b>Capacity</b>	<b>2,12</b>	<b>2,6</b>	<b>3,2</b>	<b>5,1</b>
	Input power	0,73	0,97	1,15	1,93
	EER/Energy Label	2,9 / C	2,68 / D	2,78 / D	2,64 / D
	Operating limits	10/46°C Dry Bulb	10/46°C Dry Bulb	10/46°C Dry Bulb	10/46°C Dry Bulb
<b>Heating</b>	<b>Capacity</b>	<b>2,31</b>	<b>3,07</b>	<b>3,84</b>	<b>5,0</b>
	Input power	0,69	0,89	1,06	1,9
	COP/Energy Label	3,12 / D	3,15 / D	3,3 / D	2,92 / D
	Operating limits	-9/24°C Dry Bulb	-9/24°C Dry Bulb	-9/24°C Dry Bulb	-9/24°C Dry Bulb
<b>Indoor unit</b>	Sound pressure level 1 mt <sup>1</sup>	31/37	35/40	33/40	35/44
	Sound power level <sup>1</sup>	45/50	48/52	47/53	50/55
	Airflow <sup>1</sup>	320/400	350/450	460/620	450/670
	Dehumidification	l/h 0,7	1,0	1,05	2,2
	Dimensions (WxDxH)	mm 680x180x250	680x180x250	840x180x250	900x200x295
	Weight	kg 7	7	8	12
<b>Outdoor unit</b>	Sound pressure level 1 mt	52	52	54	49
	Sound power level	62	62	65	65
	Airflow	m <sup>3</sup> /h 1200	1265	1200	-
	Compressor type	Rotary	Rotary	Rotary	Rotary
	Dimensions (WxDxH)	mm 600x240x520	610x240x520	610x240x520	795x290x610
	Weight	kg 23	27	29	42
<b>Power supply 1-230V-50Hz</b>	Power supply side	Indoor	Indoor	Indoor	Indoor
	Power cable section	mm <sup>2</sup> 3x1,5	3x1,5	3x1,5	3x1,5
	Fuse rating am	A 10	10	16	16
	Electrical connections	mm <sup>2</sup> 4x1	4x1	4x1,5	4x1,5
Electrical connections	mm <sup>2</sup> 5x1	5x1	5x1,5	5x1,5	
<b>Pipe line</b>	Suction pipe diameter	inches 3/8"	3/8"	1/2"	1/2"
	Liquid pipe diameter	inches 1/4"	1/4"	1/4"	1/4"
	Max lenght	m 10	12	15	15
	Max height	m 7	7	7	7

<sup>1</sup>Data are relative to Low speed, Medium speed and High speed

# Airwell

Your official dealer

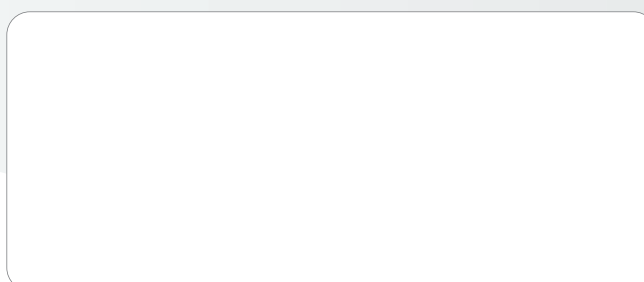

### Airwell Group

1, Bis Avenue du 8 mai 1945  
 Saint Quentin en Yvelines  
 78284 GUYANCOURT  
 France  
 Tel. +33 (0)1 39 44 78 00  
 Fax +33 (0)1 39 44 65 17

www.airwell.com  
 contact@airwell.com

