

# SX TELECOM

## FLOOR/CEILING SPLIT UNITS

3 Cooling models  
From 3,5 kW to 8,3 kW

INDOOR UNIT **SX TELECOM 12-18-30**



### ULTRA SIMPLE

Mounting template for preparing both low wall mounting and ceiling installation.



### ULTRA QUICK

Wall bracket used for pre-fitting and attaching pipe links (pipe outlet possible on the rear, left or right).



### ULTRA PRACTICAL

Direct access to electrical and refrigeration connections without dismantling the unit.

## APPLICATIONS

- The SX Close control Telecom is developed for telecom communication rooms that could operate in temperature down to -10°C.
- The system specially designed for process applications, equipped with several safety systems and full electromagnetic radiation (EMR) protection.

## PRODUCT ADVANTAGES

- Can be installed as floor or ceiling.
- Microprocessor control.
- Automatic treated air sweep (Horizontal and vertical).
- Can be operated under the condition of outdoor temperature of -10°C by real pressure input.
- Compatible with Airconet remote control.
- Infrared remote control and manual control on the unit.
- Supplied with RC4 remote control.

\* Wall mounted RCW or RCW2 remote control available in accessory.

**RC4**


**RCW2\***



OUTDOOR UNIT  
**GC 12 LT**



OUTDOOR UNIT  
**GC 18 LT**



OUTDOOR UNIT  
**GC 30T LT**






## SX TELECOM

		SX 12 TELECOM		SX 18 TELECOM		SX 30 TELECOM	
Indoor Units		SX 12 TELECOM		SX 18 TELECOM		SX 30 TELECOM	
Outdoor Units		GC 12 LT		GC 18 LT		GC 30T LT	
Cooling	Capacity	kW	3,57	5,65	8,3		
	Power input	kW	1,06	1,63	2,77		
	EER/Energy Label		3,37 / A	3,21 / A	3,0 / C		
	Operating limits	°C	-9/+46 °C Dry Bulb	-9/+46 °C Dry Bulb	-9/+46 °C Dry Bulb		
	Sound pressure level 1 mt <sup>1</sup>	dB(A)	38/41/45	40/44/47	49/53/56		
Indoor unit	Sound power level <sup>1</sup>	dB(A)	51/53/56	51/55/59	60/64/68		
	Airflow <sup>1</sup>	m <sup>3</sup> /h	350/390/420	460/520/560	700/895/1020		
	Dimensions (WxDxH)	mm	820x190x630	820x190x630	1200x190x630		
	Weight	kg	22	21	32		
	Part number		7SP012164	7SP012165	7SP012166		
Outdoor unit	Price	€					
	Sound pressure level 1 mt	dB(A)	54	54	69		
	Compressor type		Rotary	Rotary	Rotary		
	Dimensions (WxDxH)	mm	760x245x545	795x290x610	900x340x860		
	Weight	kg	32,5	42	78		
Power supply 1-230V-50Hz	Part number		7SP061711	7SP061712	-		
	Price	€			-		
	Full set price	€			-		
Power supply 3-400V-50Hz	Part number		-	-	7SP061713		
	Price	€	-	-			
	Full set price	€	-	-			
Power supply 1-230V-50Hz	Power supply side		Indoor or Outdoor	Indoor or Outdoor	Outdoor		
	Power cable section	mm <sup>2</sup>	3x1,5	3x2,5	3x4		
	Fuse rating	A	10	16	3x16		
	Electrical connections	mm <sup>2</sup>	4x1,5	4x2,5	5x1,5		
Power supply 3-400V-50Hz	Power supply side		-	-	Outdoor		
	Power cable section	mm <sup>2</sup>	-	-	5x2,5		
	Fuse rating	A	-	-	3x16		
	Electrical connections	mm <sup>2</sup>	-	-	5x1,5		
Pipe line	Suction pipe diameter	inches	3/8"	3/8"	5/8"		
	Liquid pipe diameter	inches	1/4"	1/4"	3/8"		
	Max lenght	m	15	15	30		
	Max height	m	7	7	10		

<sup>1</sup>Data are relative to Low speed, Medium speed and High speed

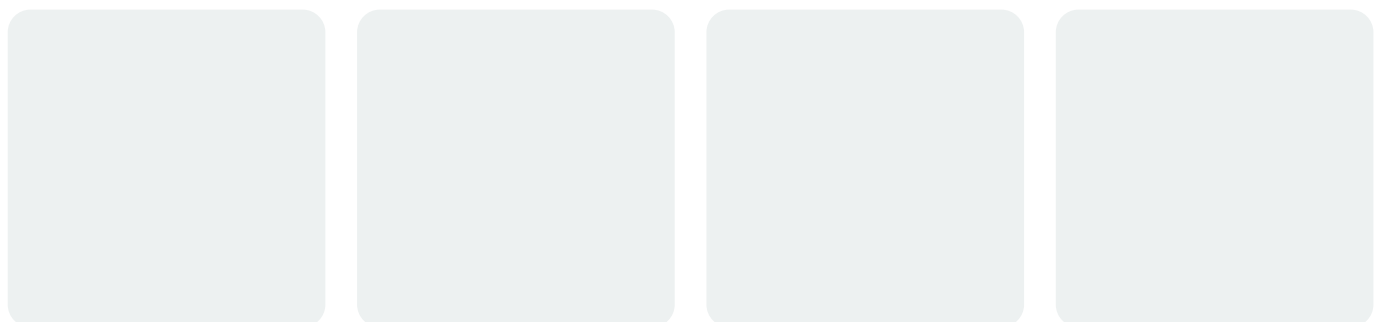

Accessories	SX 12 T	SX 18 T	SX 30 T
Remote control RCW2	7ACEL1212	€	