




RC08A

FSF FLOOR STANDING

- > Floor standing available in 12.4 kW capacity.
- > Cooling & Heating mode.
- > "I feel" function with precise room temperature control.

PRODUCT ADVANTAGES

- > Motorized air control in 4 dimensional, right to left and up to down.
- > Self diagnostic by digital failure code indication.
- > Auxiliary electrical heater 2,5 kW.

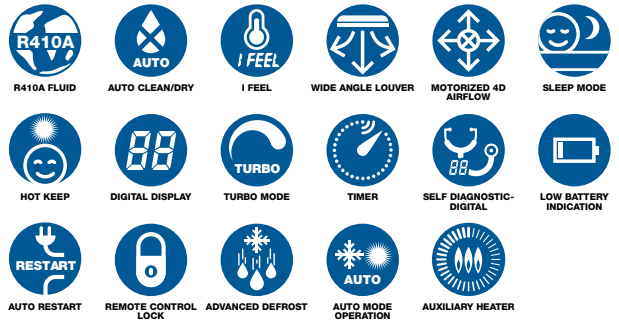

FSF TECHNICAL DATA

	Indoor units		AWSI-FSF045-N13
	Outdoor units		AWAU-YFF045-H13
COOLING	Capacity	kW	12.4
	Input power	kW	4.94
	EER/Energy Label		2.51
	Outdoor temperature operating limits	°C	18/43°C Dry Bulb
HEATING	Capacity	kW	13.6 (+2.5)
	Dehumidification	l/h	4.84 (+2.5)
	Input power	kW	2.81
	COP/Energy Label		-7/24°C Dry Bulb
	Outdoor temperature operating limits	°C	46/48/50/52
INDOOR UNIT	Sound pressure level to 1 m (LS/MS/HS/SS)	dB(A)	56/58/60/62
	Sound power level (LS/MS/HS/SS)	dB(A)	1350/1500/1650/1800
	Airflow (LS/MS/HS/SS)	m³/h	6
	Dimensions (WxDxH)	mm	518x395x1870
	Weight	kg	63
	Part number		7SP011082
OUTDOOR UNIT	Sound pressure level to 1 m	dB(A)	59
	Sound power level	dB(A)	69
	Airflow	m³/h	4000
	Compressor type		Scroll
	Dimensions (WxDxH)	mm	1032x412x1250
	Weight	kg	110
	Part number		7SP061802
POWER SUPPLY 1~230V - 50 H	Power supply side		Outdoor
	Power cable section	mm²	5x2.5
	Fuse rating am	A	25
	Electrical connections	mm²	5x1.0 + 5x1.0 + 4x1.0
PIPE LINE	Suction pipe diameter	inches	3/4"
	Liquid pipe diameter	inches	1/2"
	Max lenght	m	25
	Max height	m	40

AIRWELL SOLUTIONS

