



FSF

FLOOR STANDING


- Floor standing available in 12.4 kW capacity.
- Cooling & Heating mode.
- "I feel" function with precise room temperature control.



RC08A

PRODUCT ADVANTAGES

- Motorized air control in 4 dimensional, right to left and up to down.
- Self diagnostic by digital failure code indication.
- Auxiliary electrical heater 2,5 kW.

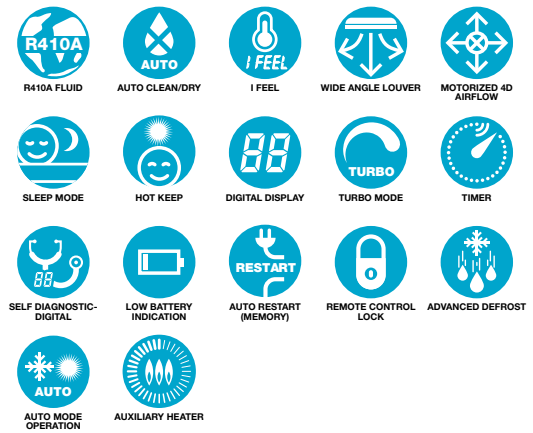

FSF TECHNICAL DATA

Indoor unit		AWSI-FSF045-N13
Outdoor unit		AWAU-YFF045-H13
COOLING		
Capacity	kW	12.4
Input power	kW	4.94
EER/Energy Label		2.51/E
Outdoor temperature operating limits	°C	18/43°C Dry Bulb
HEATING		
Capacity	kW	13.6 (+2.5)
Input power	kW	4.84 (+2.5)
COP/Energy Label		2.81/D
Outdoor temperature operating limits	°C	-7/24°C Dry Bulb
INDOOR UNIT		
Sound pressure level to 1 m (LS/MS/HS/SS)	dB(A)	46/48/50/52
Sound power level (LS/MS/HS/SS)	dB(A)	56/58/60/62
Airflow (LS/MS/HS/SS)	m³/h	1350/1500/1650/1800
Dehumidification	l/h	6
Dimensions (WxHxD)	mm	518x1870x395
Weight	kg	63
Part number		7SP011082
OUTDOOR UNIT		
Sound pressure level to 1 m	dB(A)	59
Sound power level	dB(A)	69
Airflow	m³/h	4000
Compressor type		Scroll
Dimensions (WxHxD)	mm	1032x412x1250
Weight	kg	110
Part number		7SP061802
POWER SUPPLY 3~400V - 50 HZ		
Power supply side		Outdoor
Power cable section	mm²	5x2.5
Fuse rating am	A	25
Electrical connections	mm²	5x1.0 + 5x1.0 + 4x1.0
PIPE LINE		
Suction pipe diameter	inches	3/4"
Liquid pipe diameter	inches	1/2"
Max length	m	25
Max height	m	40

AIRWELL SOLUTIONS

