




## NDSLPL

### EXTRA SLIM DUCTED

6 Heat Pump models  
From 2,5 to 7 kW

INDOOR UNIT  
NDSLPL 7-9-12-16-18-22 R

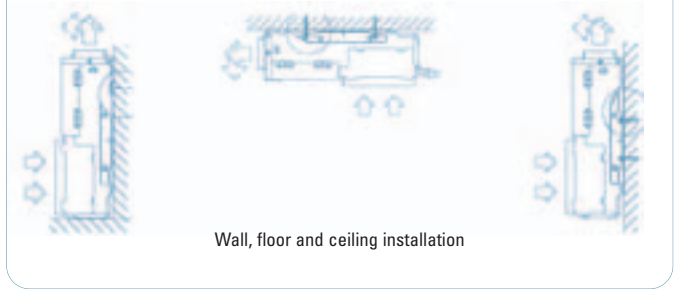

Wall, floor and ceiling installation

### PRODUCT ADVANTAGES

- Extremely thin at 190 mm.
- The only modular ducted unit that can be installed horizontally or vertically as a floor console or a wall or ceiling mounted unit.
- Largest capacity range.
- Low noise levels.
- Washable anti-bacterial, anti-mould filter included.
- 3-Speed Centrifugal Ventilation.

			ST NDSLPL 7R	ST NDSLPL 9R	ST NDSLPL 12R	ST NDSLPL 16R	ST NDSLPL 18R	ST NDSLPL 22R
<b>Cooling</b>	Capacity	kW	2,2	2,8	3,6	4,5	5,6	6,4
	Input power	kW	0.037	0.037	0.037	0.065	0.065	0.088
<b>Heating</b>	Capacity	kW	2,5	3,2	4	5	6,3	7
	Input power	kW	0.037	0.037	0.037	0.065	0.065	0.088
<b>Indoor unit</b>	Sound pressure level to 1 m <sup>1</sup>	dB(A)	20/24/31	20/24/31	27/35/39	27/35/39	34/39/43	34/39/43
	Air flow <sup>1</sup>	m <sup>3</sup> /h	335/470/880	335/470/880	335/470/880	450/540/620	450/540/620	520/600/680
	Available static pressure <sup>1</sup>	Pa	5/6/7,5	5/6/7,5	5/6/7,5	4,7/7,2/10	4,7/7,2/10	4,7/7,2/10
	Height	mm	585	585	585	585	585	585
	Width	mm	890	890	890	890	890	890
	Depth	mm	190	190	190	190	190	190
	Weight	kg	25	25	25	25	25	25
	<b>Part number</b>		<b>7SP03R001</b>	<b>7SP03R002</b>	<b>7SP03R003</b>	<b>7SP03R004</b>	<b>7SP03R005</b>	<b>7SP03R006</b>
<b>Pipe line</b>	Suction pipe diameter	inches	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
	Liquid pipe diameter	inches	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"

<sup>1</sup> Data are relative to Low Speed, Medium Speed and High Speed.

<b>Accessories</b>	Size	ST NDSLPL 7R	ST NDSLPL 9R	ST NDSLPL 12R	ST NDSLPL 16R	ST NDSLPL 18R	ST NDSLPL 22R
Wired remote control NRCT-FL	Part number	7ACELR001	7ACELR001	7ACELR001	7ACELR001	7ACELR001	7ACELR001
Infrared remote control RCIRC-FL	Part number	7ACELR310	7ACELR310	7ACELR310	7ACELR310	7ACELR310	7ACELR310
Simplified remote control NRCB-FL	Part number	7ACELR315	7ACELR315	7ACELR315	7ACELR315	7ACELR315	7ACELR315