



All sizes except
FCD 048-060



- Comfort "I Feel": temperature sensor in RC08C remote control.
- Reduced energy consumption using the hot mode alone.
- Interface dedicated to the installer for commissioning and maintenance.
- Compatible with a centralized remote control.
- Inventory optimization thanks to a multi-range outdoor unit (YMD).

+ PRODUCTS

- Compatible in monosplit and multisplit.
- Wide air diffusion.
- Floor or ceiling installation.
- G1 filter.



RC08C
included




RCW6
(optional)



RCW8
(optional)

4 DIMENSIONAL AIRFLOWS FOR MAXIMUM COMFORT

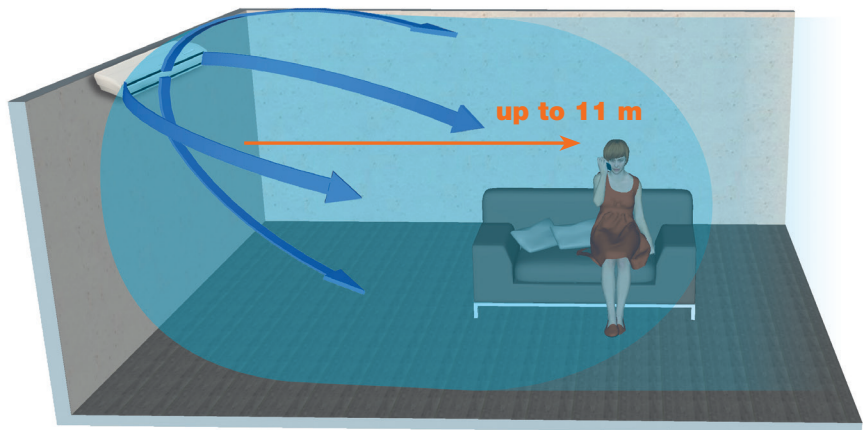

FEATURES

TECHNOLOGY:



DC INVERTER



R410A FLUID



ELECTRONIC
EXPANSION VALVE



REDUNDANCY
FUNCTION

AIR QUALITY / CLEAN:



AIR FILTER



FRESH AIR

USER FUNCTIONS:



I FEEL



NIGHT MODE



PROGRAMMABLE
TIMER



AUTO RESTART
(MEMORY)



REMOTE CONTROL
LOCK

INSTALLER FUNCTIONS:



ERROR CODE VIA
INDOOR UNIT



SELF DIAGNOSTIC



LEFT/RIGHT DRAIN
CONNECTION



ALARM OUTPUT



UNIT ON INPUT



DRY CONTACT
ON/OFF







WATER PUMP
CONNECTION
(OPTIONAL)



BMS COMPATIBLE

COMBINATIONS

Indoor unit	Compatible with outdoor unit
Floor-ceiling FCD 18-24-36 	Monosplit YMD 18-24-36 
FCD 48-60 	YMD 48-60 

FCD

Floor ceiling monosplit



All sizes except FCD 048-060

FCD TECHNICAL DATA

Indoor units		AWSI-FCD018-N11	AWSI-FCD024-N11	AWSI-FCD036-N11	AWSI-FCD036-N11	AWSI-FCD048-N11	AWSI-FCD060-N11
Outdoor units		AWAU-YMD018-H11	AWAU-YMD024-H11	AWAU-YMD036-H11	AWAU-YMD036-H13	AWAU-YMD048-H13	AWAU-YMD060-H13
Phase		Single phase	Single phase	Single phase	Three phases	Three phases	Three phases
COOLING							
Rated power (min./max.)	kW	5.1 (0.8-6.1)	6.8 (1.2-8.2)	10.5 (2.9-12.0)	10.5 (2.9-12.0)	14.0 (4.0-16.4)	16.0 (5.0-18.1)
Pdesignc	kW	5.1	6.8	10.5	10.5	14.0	16.0
Rated power input	kW	1.579	2.252	4.008	4.008	5.344	6.107
SEER/Energy label		6.5/A++	6.1/A++	6.3/A++	6.1/A++	6.1/A++	6.1/A++
Operating limits	°C	-15°/50° Dry bulb					
HEATING							
Rated power (min./max.)	kW	5.6 (0.9-7.0)	7.5 (1.2-8.6)	11.0 (2.6-13.2)	11.0 (2.6-13.2)	16.0 (4.4-18.4)	18.0 (5.3-20.5)
Pdesignh (average climate)	kW	4.8	5.8	10.2	10.2	11.6	12
Pdesignh (warmer climate)	kW	5.2	5.8	10.5	10.5	11.6	12.2
Rated power input	kW	1.466	2.072	3.039	3.039	4.969	5.96
SCOP/Energy label (average climate)		4.0/A+	4.0/A+	4.0/A+	4.0/A+	4.0/A+	4.0/A+
SCOP/Energy label (warmer climate)		5.1/A+++	5.1/A+++	5.1/A+++	5.1/A+++	5.1/A+++	5.1/A+++
Operating limits	°C	-15°/24° Dry bulb					
INDOOR UNIT							
Sound pressure level to 1 m (LS/MS/HS)	dB(A)	38/41/44	44/49/52	43/49/52	43/49/52	46/51/54	46/51/57
Sound power level	dB(A)	57	63	63	63	66	69
Airflow (LS/MS/HS)	m³/h	700/800/900	850/1050/1180	1400/1770/2050	1400/1770/2050	1400/1800/2100	1280/1660/2250
Dehumidification	l/h	1.5	2.2	3.1	3.1	5	5.5
Outline dimensions (WxHxD)	mm	1068x675x235	1068x675x235	1650x675x235	1650x675x235	1650x675x235	1650x675x235
Package dimensions (WxHxD)	mm	1145x755x313	1145x755x313	1725x755x313	1725x755x313	1725x755x313	1725x755x313
Net weight/Gross weight	kg	25.8/30.6	25/30	40.3/46.9	40.3/46.9	38.2/44.6	40.5/47
Part number		7SP012231	7SP012232	7SP012233	7SP012233	7SP012234	7SP012235
OUTDOOR UNIT							
Sound pressure level to 1 m	dB(A)	54	60	61	61	63	63
Sound power level	dB(A)	65	65	67	68	72	75
Airflow	m³/h	2100	2700	4300	4300	6800	7200
Compressor type		Rotary DCI	Twin Rotary DCI	Twin Rotary DCI	Twin Rotary DCI	Twin Rotary DCI	Twin Rotary DCI
Outline dimensions (WxHxD)	mm	800x554x333	845x702x363	946x810x410	946x810x410	952x1333x415	952x1333x415
Package dimensions (WxHxD)	mm	920x615x390	965x765x396	1090x865x500	1090x865x500	1095x1470x500	1095x1470x500
Net weight/Gross weight	kg	35.5/38.4	49/51.5	67.2/72.9	78.9/83.9	108.1/121.2	112.8/126
Part number		7SP062892	7SP062893	7SP062895	7SP062896	7SP062899	7SP062900
POWER SUPPLY							
Phase/Tension/Frequency		1P/230V/50Hz	1P/230V/50Hz	1P/230V/50Hz	3P/400V/50Hz	3P/400V/50Hz	3P/400V/50Hz
Power supply side		Indoor & Outdoor	Indoor & Outdoor	Indoor & Outdoor	Indoor & Outdoor	Indoor & Outdoor	Indoor & Outdoor
Power cable section	mm²	3x1.0+3x2.5	3x1.0+3x2.5	3x1.0+3x4.0	3x1.0+5x2.5	3x1.0+5x2.5	3x1.0+5x2.5
Fuse rating am (D curve)	A	10+16	10+25	10+30	10+20	10+25	10+25
Electrical connections	mm²	2x0.5	2x0.5	2x0.5	2x0.5	2x0.5	2x0.5
PIPE LINE							
Suction pipe diameter	inches	1/2"	5/8"	5/8"	5/8"	5/8"	5/8"
Liquid pipe diameter	inches	1/4"	3/8"	3/8"	3/8"	3/8"	3/8"
Max. length	m	30	50	65	65	65	65
Max. height	m	20	25	30	30	30	30
Refrigerant / GWP		R410A/2088	R410A/2088	R410A/2088	R410A/2088	R410A/2088	R410A/2088
Charge (5 m)	kg	1,78	1,95	3,2	3,2	4	4,3
Charge additionnelle	g/m	15	30	30	30	30	30

FP-FCD EN 0318 - AIRWELL RESIDENTIAL SAS - Specifications subject to change without notice. Pictures non contractual. Printed in U.E. B2Com