




DDM 012



DDM 018-060

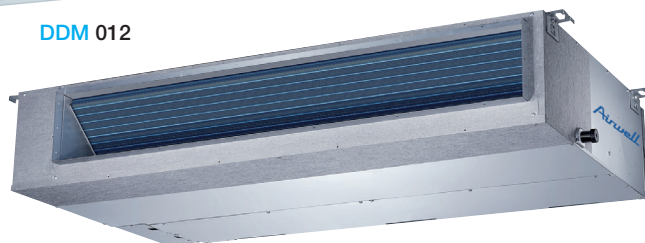

+ PRODUCTS

- **Twin application.**
- External static pressure until 160 Pa.
- Compatible in monosplit and multisplit.



RCW11 (included) RC08C (optional) RCW20 (optional)

FEATURES

TECHNOLOGY:




AIR QUALITY/CLEAN:



USER FUNCTIONS:



INSTALLER FUNCTIONS:

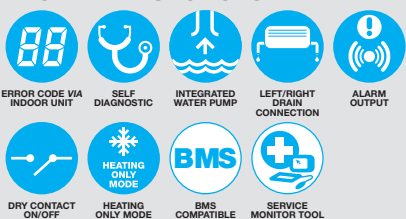

- Comfort "I Feel": temperature sensor in the remote control RC08C.
- Designed for easy maintenance and installation.
- Reduced energy consumption using the heating only mode.
- Optimisation of the stock thanks to a multi-range external group (YDFA).
- Port for ventilation fan: increase static pressure or useful for adjacent room.



OPTIONS

Accessory	Part number	Photo	Function/Description
Wireless controller RC08C	7ACEL1740		Timer, eco mode, "Follow me" option, swing, technician mode, heating only mode.
Wired single control RCW20 + adaptor	7ACEL1775 + 7ACEL1776		Zone control , mode, fan speed, timer On/Off, "I Feel" function, temperature. One adaptor by unit is required (order separately).
Central controller RCW21	7ACEL1777		Central controller . Controls up to 64 indoor units with individual setting failure codes indication, On/Off dry contact, last operation memory.
BMS gateway	7ACEL1708		Maximum 1024 units could be connected (16 gateways).
Test tool	7ACEL1710		Easy viewing of system parameters, failure records and parameter adjustments.
Insulated air duct plenum	7ACVF0136		3 ducts DN160. For DDM 12-18.
	7ACVF0137		3 ducts DN 160. For DDM 24.
	7ACVF0138		3 ducts DN 160. For DDM 36.
	7ACVF0139		3 ducts DN 160. For DDM 48-60.



All sizes except DDM 048-060

DDM TECHNICAL DATA

Indoor unit		AW-DDM012-N91	AW-DDM018-N91	AW-DDM024-N91	AW-DDM036-N91	AW-DDM036-N91	AW-DDM048-N91	AW-DDM060-N91
Outdoor unit R32		AW-YDFA012-H91	AW-YDFA018-H91	AW-YDFA024-H91	AW-YDFA036-H91	AW-YDFA036-H93	AW-YDFA048-H93	AW-YDFA060-H93
Phase		Single phase	Single phase	Single phase	Single phase	Three phase	Three phase	Three phase
COOLING								
Rated power (min./max.)	kW	3.52 (1.50-4.75)	5.28 (1.49-5.69)	7.03 (3.28-8.16)	10.55 (4.04-12.02)	10.55 (4.04-12.02)	14.07 (4.26-15.19)	15.24 (5.86-17.29)
Pdesignc	kW	3.52	5.3	7.03	10.5	10.5	14	15.4
Rated power input	kW	0.95	1.63	2.19	4.00	4.10	5.15	5.42
SEER/Energy label		6.5/A++	6.1/A++	6.1/A++	6.1/A++	6.1/A++	6.1/A++	6.1/A++
Operating limits	°C	-15°/50° Dry bulb						
HEATING								
Rated power (min./max.)	kW	4.10 (0.97-5.63)	5.86 (2.2-6.15)	7.62 (2.72-8.72)	11.14 (2.81-13.19)	11.14 (2.81-13.19)	16.12 (3.7-18.02)	18.17 (4.69-20.52)
Pdesignh (average climate)	kW	3.2	4.3	5.4	8.4	8.5	12	12.5
Pdesignh (warmer climate)	kW	3.7	5.3	6.1	10.5	10.5	12.5	13.1
Rated power input	kW	1.10	1.58	2.05	3.10	3.00	4.28	5.33
SCOP/Energy label (average climate)		4.0/A+	4.0/A+	4.0/A+	4.0/A+	4.0/A+	4.0/A+	4.0/A+
SCOP/Energy Label (warmer climate)		5.1/A+++	5.1/A+++	5.1/A+++	5.1/A+++	5.1/A+++	5.1/A+++	5.1/A+++
Operating limits	°C	-15°/24° Dry bulb						
Power @ -10°C	kW	3.3	4.7	6.2	9.0	9.0	13.0	14.7
Power @ -15°C	kW	2.7	3.9	5.0	7.3	7.3	10.6	11.9
INDOOR UNIT								
Sound pressure level to 1 m (LS/MS/HS)	dB(A)	26/30/35	33/38/41	40/42/44	40/43/47	40/43/47	48/49/50	50/52/54
Sound power level	dB(A)	56	59	62	62	63	68	71
Airflow (LS/MS/HS)	m³/h	300/480/600	350/650/880	839/1054/1248	750/1150/1400	750/1150/1400	1680/2040/2400	1820/2210/2600
External static pressure (standard/max.)	Pa	25 (0-60)	25 (0-100)	25 (0-160)	37 (0-160)	37 (0-160)	50 (0-160)	50 (0-160)
Dehumidification	l/h	1.5	2.0	3	3.8	3.8	4.5	5.5
Outline dimensions (WxHxD)	mm	700x200x450	880x210x674	1100x249x774	1360x249x774	1360x249x774	1200x300x874	1200x300x874
Package dimensions (WxHxD)	mm	860x285x540	1070x280x725	1305x305x805	1570x305x805	1570x305x805	1405x355x915	1405x355x915
Net weight/Gross weight	kg	18/22	24.3/29.6	31.5/38.9	40.5/48.5	40.5/48.5	47.6/55.8	47.6/55.8
Part number		7SP033031	7SP033032	7SP033033	7SP033034	7SP033034	7SP033035	7SP033036
OUTDOOR UNIT								
Sound pressure level to 1 m	dB(A)	55	55	62	65	64	66	66
Sound power level	dB(A)	62	62	66	68	68	72	74
Airflow	m³/h	2000	2000	2700	4000	4000	7500	7500
Compressor type		Rotary DCI	Rotary DCI	Rotary DCI	Rotary DCI	Rotary DCI	Rotary DCI	Rotary DCI
Outline dimensions (WxHxD)	mm	800x554x333	800x554x333	845x702x363	946x810x410	946x810x410	952x1333x415	952x1333x415
Package dimensions (WxHxD)	mm	920x625x390	920x615x390	965x765x395	1090x875x500	1090x875x500	1095x1480x495	1095x1480x495
Net weight/Gross weight	kg	34.7/37.5	33.7/36.6	49.4/52.8	66.8/73.4	81.5/87.0	106.7/119.9	111.3/124.3
Part number		7SP063050	7SP063051	7SP063052	7SP063053	7SP063054	7SP063055	7SP063056
POWER SUPPLY								
Phase/Voltage/Frequency		1P/230V/50Hz	1P/230V/50Hz	1P/230V/50Hz	1P/230V/50Hz	3P/400V/50Hz	3P/400V/50Hz	3P/400V/50Hz
Power supply side		Outdoor	Ind. & Out.	Ind. & Out.	Ind. & Out.	Ind. & Out.	Ind. & Out.	Ind. & Out.
Power cable section	mm²	3x1.5	3x1.5+3x2.5	3x1.5+3x2.5	3x1.5+3x4	3x1.5+5x2.5	3x1.5+5x2.5	3x1.5+5x2.5
Fuse rating am (D curve)	A	16	10+16	10+25	10+30	10+20	10+25	10+25
Electrical connections	mm²	4x1.5	2x0.5	2x0.5	2x0.5	2x0.5	2x0.5	2x0.5
PIPE LINE								
Suction pipe diameter	inches	3/8"	1/2"	5/8"	5/8"	5/8"	5/8"	5/8"
Liquid pipe diameter	inches	1/4"	1/4"	3/8"	3/8"	3/8"	3/8"	3/8"
Max. length	m	25	30	50	65	65	65	65
Max. height	m	10	20	25	30	30	30	30
Refrigerant/GWP		R32/675	R32/675	R32/675	R32/675	R32/675	R32/675	R32/675
Charge (5 m)	kg	0.87	1.15	1.5	2.4	2.4	2.8	2.95
Additional charge	g/m	12	12	24	24	24	24	24
R410A YMD outdoor unit compatible*		AWAU-YMD012-H11	AWAU-YMD018-H11	AWAU-YMD024-H11	AWAU-YMD036-H11	AWAU-YMD036-H13	AWAU-YMD048-H13	AWAU-YMD060-H13
Part number		7SP062970	7SP062972	7SP062893	7SP062895	7SP062896	7SP062899	7SP062900

* Technical specifications - See R410A documentation.

COMBINATIONS

Indoor unit	Compatible with outdoor unit	
	Monosplit	Multisplit
DDM 12 & 18 	YDFA 	YDZC
DDM 24 & 36 	YDFA 	
DDM 48 & 60 	YDFA 	