



Available
in R32
fluid

+ PRODUCTS

- Competitive and multi matching solution.
- **Connected solution (WiFi).**



RC08C
(included)



RCW8
(optional)

FEATURES

TECHNOLOGY:



DC INVERTER



R410A FLUID



GOLDEN FIN TREATMENT

AIR QUALITY/CLEAN:



AIR FILTER



AUTO CLEAN/DRY

USER FUNCTIONS:



I FEEL



NIGHT MODE



REFRIGERANT LEAKAGE DETECT



PROGRAMMABLE TIMER



AUTO RESTART (MEMORY)



REMOTE CONTROL LOCK



WiFi

INSTALLER FUNCTIONS:



ERROR CODE VIA INDOOR UNIT



SELF DIAGNOSTIC



LEFT/RIGHT DRAIN CONNECTION




HEATING ONLY MODE



SERVICE MONITOR TOOL

- High efficiency (SCOP higher than 4 and SEER higher than 6): energy savings.
- Comfort "I Feel": temperature sensor in RC08C remote control.
- Reduced energy consumption using the heating only mode.
- High wall with digital display (mode, temperature...).

Refrigerant leakage detection alarm system

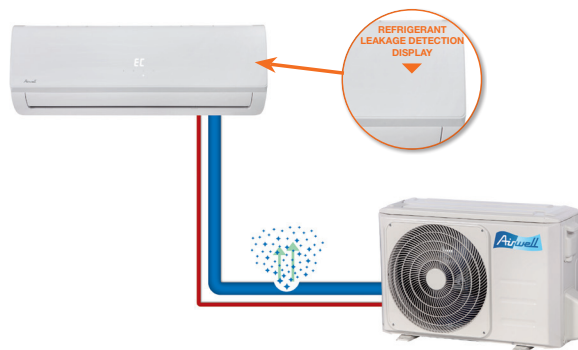

OPTIONS

Accessory	Part number	Photo	Function
Wired single control RCW8	7ACE1706		Mode, fan speed, timer On/Off, temperature and swing.
Test tool for high wall	7ACE1710		Easy viewing of system parameters, failure records and parameter adjustments.
Air Net WiFi module	7ACE1744		Control air conditioners with your mobile phone, tablet or computer with wireless router and internet.
Water pump FlowwatchDesign	7ACTL0518		Evacuate condensates from indoor units.



HKD TECHNICAL DATA

Indoor unit		AWSI-HKD009-N11	AWSI-HKD012-N11	AWSI-HKD018-N11	AWSI-HKD024-N11
Outdoor unit		AWAU-YKD009-H11	AWAU-YKD012-H11	AWAU-YKD018-H11	AWAU-YKD024-H11
Phase		Single phase	Single phase	Single phase	Single phase
COOLING					
Rated power (min./max.)	kW	2.65 (1.0 -3.2)	3.54 (1.08-4.1)	5.0 (1.8-6.1)	6.8 (2.7-7.8)
Pdesignc	kW	2.65	3.54	5.0	6.8
Rated power input	kW	0.775	1.096	1.548	2.411
SEER/Energy label		6.1/A++	6.1/A++	6.5/A++	6.1/A++
Operating limits	°C	-15°/50° Dry bulb			
HEATING					
Rated power (min./max.)	kW	2.7 (0.82-3.3)	3.2 (0.9-4.2)	5.0 (1.4-6.7)	7.3 (1.6-8.7)
Pdesignh (average climate)	kW	2.2	2.3	4.2	5.5
Pdesignh (warmer climate)	kW	2.8	2.9	4.4	6.3
Rated power input	kW	0.728	0.863	1.348	2.274
SCOP/Energy label (average climate)		4.0/A+	4.0/A+	4.0/A+	4.0/A+
SCOP/Energy label (warmer climate)		5.1/A+++	5.3/A+++	5.1/A+++	5.1/A+++
Operating limits	°C	-15°/30° Dry bulb			
Power @ -10°C	kW	2.70	3.00	4.20	6.40
Power @ -15°C	kW	2.30	2.50	3.60	5.80
INDOOR UNIT					
Sound pressure level to 1 m (VL/LS/MS/HS)	dB(A)	23/29/34/38	24/33/37/42	24/32/36/42	32/35/40/44
Sound power level	dB(A)	54	54	57	60
Airflow (LS/MS/HS)	m³/h	270/320/420	370/470/570	540/680/840	640/800/980
Dehumidification	l/h	1.0	1.2	1.7	2.4
Outline dimensions (WxHxD)	mm	715x285x194	805x285x194	957x302x213	1040x327x220
Package dimensions (WxHxD)	mm	780x360x270	870x360x270	1035x380x295	1120x405x310
Net weight/Gross weight	kg	6.8/8.9	7.2/9.6	9.5/12.5	11.9/15.2
Part number		7SP023130	7SP023131	7SP023132	7SP023133
OUTDOOR UNIT					
Sound pressure level to 1 m	dB(A)	51	53	55	59
Sound power level	dB(A)	61	61	65	66
Airflow	m³/h	1800	1800	2100	2700
Compressor type		Rotary DC Inverter	Rotary DC Inverter	Rotary DC Inverter	Rotary DC Inverter
Outline dimensions (WxHxD)	mm	770x555x300	770x555x300	800x554x333	845x702x363
Package dimensions (WxHxD)	mm	900x585x345	900x585x345	920x615x390	965x755x395
Net weight/Gross weight	kg	25.2/27.4	25.5/27.7	37.8/40.5	48.4/51.6
Part number		7SP062910	7SP062911	7SP062952	7SP062913
POWER SUPPLY					
Phase/Voltage/Frequency		1P/230V/50Hz	1P/230V/50Hz	1P/230V/50Hz	1P/230V/50Hz
Power supply side		Outdoor	Outdoor	Outdoor	Outdoor
Power cable section	mm²	3x1.5	3x1.5	3x1.5	3x2.5
Fuse rating am (D curve)	A	10	10	16	25
Electrical connections	mm²	5x1.5	5x1.5	5x1.5	5x2.5
PIPE LINE					
Suction pipe diameter	inches	3/8"	3/8"	1/2"	1/2"
Liquid pipe diameter	inches	1/4"	1/4"	1/4"	1/4"
Max. length	m	25	25	30	50
Max. height	m	10	10	20	25
Refrigerant/GWP		R410A/2088	R410A/2088	R410A/2088	R410A/2088
Charge (5 m)	kg	0.8	0.8	1.48	1.85
Additional charge	g/m	15	15	15	30

COMBINATIONS

Indoor unit	Compatible with outdoor unit
High wall	Monosplit
HKD 9 to 24	YKD



