





VRF
Indoor units

Airwell

FWVA Floor ceiling

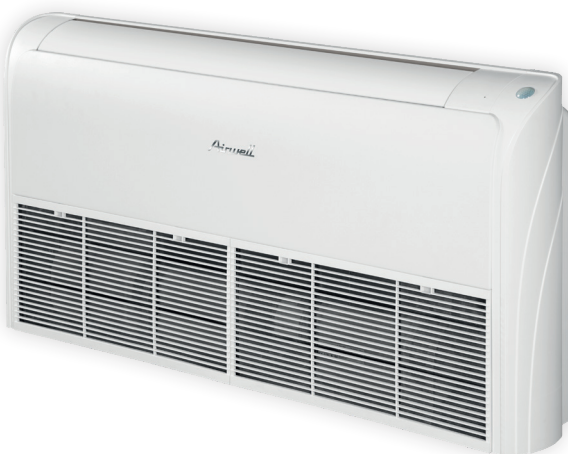

RWV05
included

+ PRODUCT

- RWV05 remote control
- New DC Inverter fan motor
- New aesthetic and modern design
- New deflectors for better air distribution
- High airflow rate
- Improved component accessibility
- Dry contact available



RCV03
(optional)



RWV03
(optional)



RWV07
(optional)

FEATURES

TECHNOLOGY



ELECTRONIC EXPANSION VALVE

FUNCTIONS USERS



I FEEL



PROGRAMMABLE TIMER



AUTO RESTART (MEMORY)

INSTALLER FUNCTIONS



DRY CONTACT ON/OFF

THE + « SUSTAINABLE DEVELOPMENT »

- > Energy savings (mode locking, setpoint limits).

THE + « USER »

- > Air blowing distance up to 11m.
- > Horizontal and vertical airflow swing.
- > Multiple applications can be connected using the dry contact: room card, presence detection.

THE + « INSTALLER »

- > Horizontal or vertical installation.

THE + « TECHNOLOGY »

- > Optimal regulation thanks to its electronic expansion valve.
- > New centrifugal fan, acoustic reduction.

TECHNICAL DATA

INDOOR UNIT		FWVA-025N-01M22	FWVA-050/045/035N-01M22	FWVA-090/080/070N-01M22	FWVA-140/110N-01M22					
Part number		7VF010001	7VF010002	7VF010003	7VF010004					
Phase		Single phase								
RATED POWER										
Cooling mode	kBtu/h	9.50	12.28	15.35	19.11	24.23	27.30	30.71	38.21	48.00
	kW	2.80	3.60	4.50	5.60	7.10	8.00	9.00	11.20	14.00
Heating mode	kBtu/h	10.92	13.65	17.06	21.50	27.30	30.71	34.12	42.60	55.00
	kW	3.20	4.00	5.00	6.30	8.00	9.00	10.00	12.50	16.00
ELECTRICAL PARAMETERS										
Phase/Voltage/Frequency		1P/220-230V/50-60Hz								
PERFORMANCES										
Airflow (LS/MS/HS)	m³/h	820/ 750/ 690	820/ 750/ 690	950/ 820/ 690	950/ 820/ 690	1420/ 1270/ 1240	1570/ 1420/ 1240	1570/ 1420/ 1240	2110/ 1990/ 1750	2110/ 1990/ 1750
Sound pressure (LS/MS/HS)	dB(A)	38/36/34	38/36/34	42/38/35	42/38/35	46/44/41	47/44/41	47/44/41	50/46/43	50/46/43
Sound power level (LS/MS/HS)	dB(A)	52/50/47	52/50/47	55/51/48	55/51/48	60/58/54	61/58/54	61/58/55	63/60/57	63/60/57
INSTALLATION										
External dimensions (WxHxD)	mm	1000 x230 x680	1000 x230 x680	1000 x230 x680	1000 x230 x680	1325 x230 x680	1325 x230 x680	1325 x230 x680	1650 x230 x680	1650 x230 x680
Shipping dimensions (WxHxD)	mm	1100 x305 x779	1100 x305 x779	1100 x305 x779	1100 x305 x779	1425 x305 x779	1425 x305 x779	1425 x305 x779	1750 x305 x779	1750 x305 x779
Net weight/Gross weight	kg	27.9/33.6	27.9/33.6	27.9/33.6	27.9/33.6	35.8/42.1	35.8/42.1	35.8/42.1	43.5/50.5	43.5/50.5
Liquid pipe diameter	inches	1/4"	1/4"	1/4"	1/4"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction pipe diameter	inches	3/8"	1/2"	1/2"	1/2"	5/8"	5/8"	5/8"	5/8"	5/8"