

+ PRODUCT

- Remote control included
- Monoblock mobile air conditioner
- Window kit included
- Easy to move (casters + handles)

Air quality




User functions




Installer functions



INSTALLATION METHODS

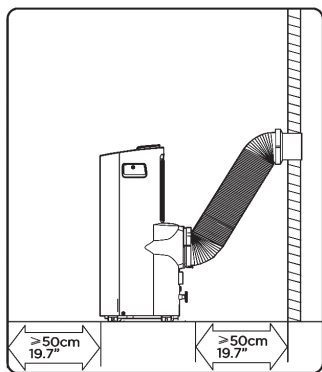

Wall installation

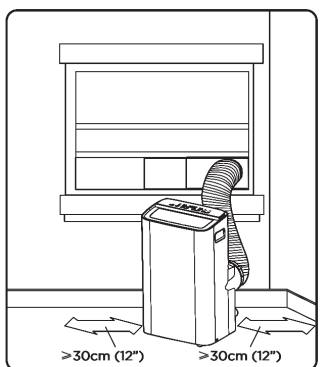

Window installation

NEW

MFHA
Portable

Made to order,
product not in stock



+ SUSTAINABLE DEVELOPMENT

- Eco-friendly R290 refrigerant.
- Compliant with WEEE directive.
- Low environmental impact.

+ TECHNOLOGY

- Condensate removal by evaporation.
- Washable air filter.
- Auto-diagnostic.

+ USER

- Easy to move thanks to casters and handles.
- Easy operation with digital display and remote control.
- Customized comfort: Cooling, Fan, Dehumidification, Auto.
- Sleep mode + 24h timer.
- Even air distribution (automatic swing).

TECHNICAL DATA

		EX-FACTORY		
INDOOR UNIT		MFHA-025C-04M25	MFHA-035C-04M25	MFHA-035R-04M25
Part number		7MB080001	7MB080002	7MB080003
Phase		Single-phase	Single-phase	Single-phase
COOLING				
Rated power	kW	2.5	3.5	3.5
Rated power input	kW	1.01	1.35	1.35
Current	A	4.40	5.90	5.90
EER/Energy label		2.6/A	2.6/A	2.6/A
Operating limits	°C	17~35°	17~35°	17~35°
HEATING				
Rated power	kW	-	-	2.93
Rated power input	kW	-	-	1.125
Current	A	-	-	5
COP/Energy label		-	-	2.6/A+
Operating limits	°C	-	-	5~30°
INDOOR UNIT				
Type		Monoblock	Monoblock	Monoblock
Sound pressure level at 1 m (LS/MS/HS)	dB(A)	50/51/52	51/52/53	50/51/52
Sound level	dB(A)	62	64	64
Airflow (LS/MS/HS)	m³/h	275/333/408	330/380/420	296/342/402
Diameter flexible emission duct	mm	150	150	150
Length range of heat emission duct	m	1.5	1.5	1.5
Dehumidification	l/h	2.582	3.3	3.3
Unit dimensions (WxHxD)	mm	410x695x300	410x695x300	443x728x349
Package dimensions (WxHxD)	mm	460x865x330	460x865x330	477x887x385
Net weight/Gross weight	kg	27/29.8	29/31.9	32.4/35.2
POWER SUPPLY				
Phase/Voltage/Frequency		1P/220-240V/50Hz	1P/220-240V/50Hz	1P/220-240V/50Hz
PIPE LINE				
Refrigerant/GWP		R290/3	R290/3	R290/3
Charge	kg	0.16	0.195	0.25