

## HJD [ **ECODESIGN** ]

High wall mono  
& premium multi  
DC Inverter



STERIONIZER

ADVANCED CONTROL OPTIONS

- High wall line available in capacities 2.5 up to 7.5 kW.
- Glossy designed unit.
- Wireless remote control included with option of wired control.
- DC Inverter and sine wave compressor drive technology.
- -15°C operating in heating mode.
- Cooling & heating operation mode.
- "I Feel" function with precise room temperature control.
- Heating mode only as an option.



All sizes



### PRODUCT ADVANTAGES

- > Multi layer air purification combine anti virus by sterionizer system and electrostatic filter for small particules 0.01  $\mu$ . that provides exceptional air quality.
- > Motorized air control in 4 directions right to left and up to down.
- > Possibility to connect to alarm output unit ON/OFF output human presence detector and group control.
- > Heating only mode force option.
- > Treatment of corrosion on outdoor units and electronic cards.
- > Possibility to reverse dry contact: normally open / normally closed.




RC08W

[ **ECODESIGN** ] Comply with ECO Design regulation

## HJD

### High wall mono & premium multi / DC Inverter

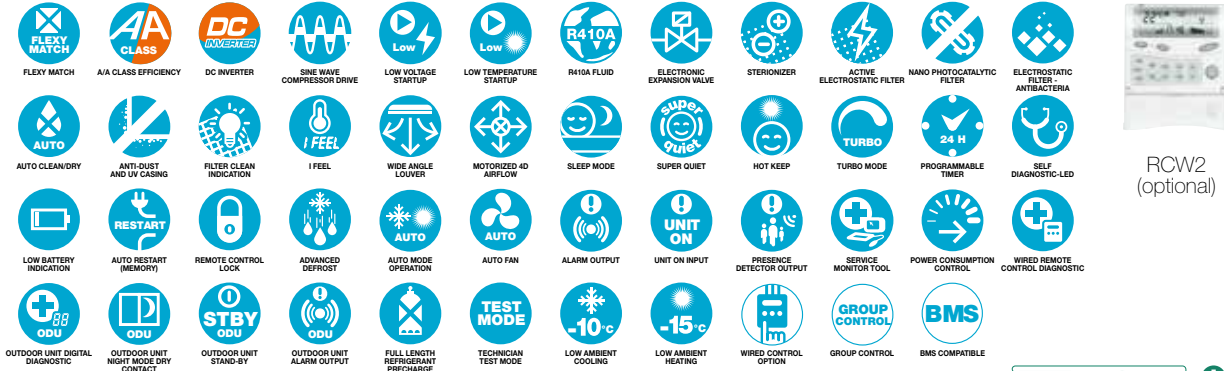

RCW2 (optional)

### [ TECHNICAL DATA ]



Indoor units		AWSI-HJD009-N11	AWSI-HJD012-N11	AWSI-HJD018-N11	AWSI-HJD024-N11	AWSI-HJD030-N11
Outdoor units		AWAU-YBDE009-H11	AWAU-YBDE012-H11	AWAU-YBDE018-H11	AWAU-YBDE024-H11	AWAU-YBDE030-H11
<b>COOLING</b>						
Rated capacity	kW	2.5 (1.4-3.6)	3.5 (1.4-4.3)	5.0 (1.5-6)	6.8 (1.5-7.5)	7.5 (2.0-9.0)
Pdesignc	kW	2.5	3.5	5.0	6.8	7.5
Input power	kW	0.5	0.87	1.35	2.20	2.23
SEER/Energy label		5.70/A+	5.61/A+	5.7/A+	5.2/A	5.2/A
Operating limits	°C	-10°/46° Dry bulb				
<b>HEATING</b>						
Rated capacity	kW	3 (1.5-5)	4 (1.5-5.8)	5.6 (1.3-6.8)	7.6 (1.5-8.8)	8.6 (2.0-9.5)
Pdesignh (average climate)	kW	2.5	3.5	4.8	6.3	8.1
Input power	kW	0.6	1	1.55	2.00	2.53
SCOP/Energy label (average climate)		4.00/A+	4.00/A+	3.9/A	3.8/A	3.8/A
SCOP/Energy label (warmer climate)		-	-	4.6/A++	4.7/A++	4.0/A+
Operating limits	°C	-15°/24° Dry bulb				
Capacity @ -10°C	kW	2.35	2.4	4.4	4.8	7.2
Capacity @ -15°C	kW	2.12	2.18	3.36	5.07	6.4
<b>INDOOR UNIT</b>						
Sound pressure level to 1 m (LS/MS/HS/SS)	dB(A)	21/26/34/39	22/26/34/40	30/34/39/43	34/38/43/47	47/50/54
Sound power level (LS/MS/HS/SS)	dB(A)	34/39/47/51	35/39/47/52	43/47/51/58	47/51/56/60	55/58/62
Airflow (LS/MS/HS)	m³/h	330/430/530	350/450/550	550/700/850	670/800/960	950/1100/1300
Dehumidification	l/h	1	1.5	2.7	2.8	3.2
Outline dimensions (WxHxD)	mm	810x285x210	810x285x210	1060x295x221	1060x295x221	1310x322x240
Package dimensions (WxHxD)	mm	870x356x282	870x356x282	1125x360x295	1125x360x295	1420x440x380
Net weight/Gross weight	kg	11.5/14	11.5/14	15/18	15/18	20/23
Part number		7SP022903	7SP022917	7SP022918	7SP022919	7SP022920
<b>OUTDOOR UNIT</b>						
Sound pressure level to 1 m	dB(A)	51	52	53	55	56
Sound power level	dB(A)	61	62	65	67	68
Airflow	m³/h	1780	1780	2500	2750	3400
Compressor type		Rotary DC Inverter	Rotary DC Inverter	Twin Rotary DC Inverter	Twin Rotary DC Inverter	Twin Rotary DC Inverter
Outline dimensions (WxHxD)		795x610x290	795x610x290	900x700x340	900x700x340	900x860x340
Package dimensions (WxHxD)	mm	970x650x394	970x650x394	985x730x435	985x730x435	985x905x435
Net weight/Gross weight	kg	38/42	38.5/42.5	56/58.5	61/63.5	66/68.5
Part number		7SP061819	7SP061820	7SP061886	7SP061887	7SP061888
<b>POWER SUPPLY 1~230V - 50 HZ</b>						
Power supply side		Indoor	Indoor	Indoor & Outdoor	Outdoor	Outdoor
Power cable section	mm²	3x1.5	3x1.5	3x2.5	3x2.5	3x2.5
Fuse rating am	A	16	16	20	20	20
Electrical connections	mm²	4x1.5	4x1.5	4x1.5	4x1.5	4x1.5
<b>PIPE LINE</b>						
Suction pipe diameter	inches	3/8"	3/8"	1/2"	5/8"	5/8"
Liquid pipe diameter	inches	1/4"	1/4"	1/4"	3/8"	3/8"
Max length	m	20	20	30	30	30
Max height	m	10	10	15	15	15