


HRD HIGH WALL MONOSPLIT

Airwell
Just feel well



NEW

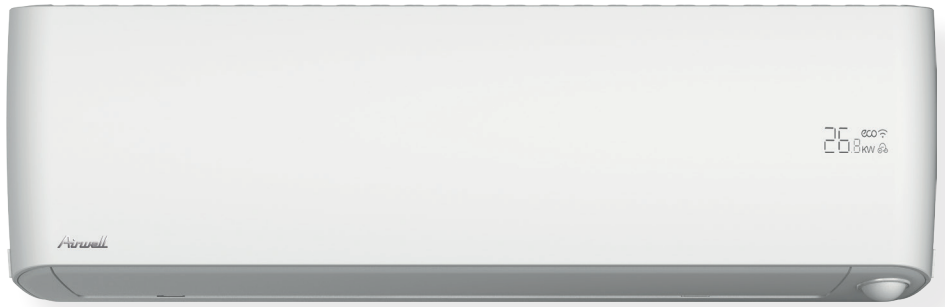

All sizes

+ PRODUCTS

- Refrigerant R32 environmental friendly.
- Designed for extreme climates.
- WiFi option.



RC08C


FEATURES



- Operating down to -30°C in heating mode.
- "I Feel" function with precise room temperature control.
- Multifan speed in indoor unit.
- "Follow Me" function.



"FOLLOW ME" FUNCTION



Wind flow away from people



Wind flow follow people



Strong wind when more people in room



Gentle wind flow when less people in room

HRD

High wall monosplit



HRD TECHNICAL DATA

Indoor units		AWSI-HRD009-N91	AWSI-HRD012-N91
Outdoor units		AWAU-YRD009-H91	AWAU-YRD012-H91
COOLING			
Rated power	kW	2.65 (1.0-4.7)	3.54 (1.3-4.8)
Pdesignc	kW	2.65	3.54
Rated power input	kW	0.489	0.802
SEER/Energy label		9.3/A+++	8.5/A+++
Operating limits	°C	-15°/50° Dry bulb	
HEATING			
Rated power	kW	4.1 (0.9-5.2)	4.3 (1.0-6.3)
Pdesignh (average climate)	kW	2.3	2.5
Pdesignh (warmer climate)	kW	3	3.1
Pdesignh (colder climate)	kW	3.6	3.8
Rated power input	kW	0.870	1.020
SCOP/Energy Label (average climate)		5.1/A+++	5.1/A+++
SCOP/Energy Label (warmer climate)		6.1/A+++	6.1/A+++
SCOP/Energy Label (colder climate)		4.0/A+	3.4/A
Operating limits	°C	-30°/30° Dry bulb	
Power @ -10°C	kW	3.40	3.40
Power @ -15°C	kW	3.10	3.10
INDOOR UNIT			
Sound pressure level to 1 m (VL/LS/MS/HS)	dB (A)	20/23/28/32	20/24/29/33
Sound power level	dB (A)	59	59
Airflow (VL/LS/MS/HS)	m³/h	270/360/450/540/640	270/360/450/540/640
Dehumidification	l/h	1.0	1.2
Outline dimensions (WxHxD)	mm	800x554x333	800x554x333
Package dimensions (WxHxD)	mm	975x325x370	975x325x370
Net weight/Gross weight	kg	13/16	13/16
Part number		7SP023060	7SP023061
OUTDOOR UNIT			
Sound pressure level to 1 m	dB (A)	51	51
Sound power level	dB (A)	57	57
Airflow	m³/h	1980	1980
Compressor type		Rotary DC Inverter	Rotary DC Inverter
Outline dimensions (WxHxD)	mm	800x554x333	800x554x333
Package dimensions (WxHxD)	mm	920x615x390	920x615x390
Net weight/Gross weight	kg	37.8/40.5	37.8/40.5
Part number		7SP062915	7SP062916
POWER SUPPLY 1~230V - 50 HZ			
Power supply side		Outdoor	Outdoor
Power cable section	mm²	3x1.5	3x1.5
Fuse rating am	A	10	10
Electrical connections	mm²	5x1.5	5x1.5
PIPE LINE			
Suction pipe diameter	inches	3/8"	3/8"
Liquid pipe diameter	inches	1/4"	1/4"
Max. length	m	25	25
Max. height	m	10	10

COMBINATIONS

Indoor unit	Compatible with outdoor unit
High wall	Monosplit
HRD	YRD
